THE CITY OF TEA TREE GULLY

› Technical Specifications

FENCING

DESCRIPTION: FENCING - RESERVE BOOM GATE (DOUBLE) WITH SLEEVED SHOOT BAR

CODE: FEN26 23/06/2026

APPLICATIONS	
	Regional
	District
	Neighbourhood
	Local
	Main Roads
	Local Roads


PERFORMANCE CRITERIA

durable and weather resistant, safe, provide clear visibility, structural integrity, low maintenance, visually appealing, robust locking mechanism, appropriate size, easy to use




IMAGE/S

Images are indicative of the style, not a specific brand. Council's procurement policy must be followed when selecting and purchasing items.

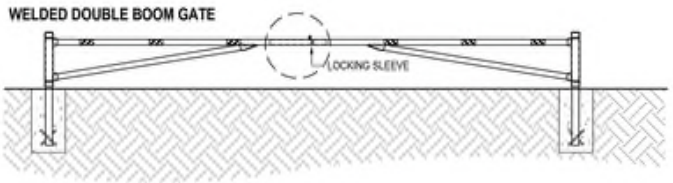

CITY OF TEA TREE GULLY

MATERIALS	Boom Gate - steel (circular hollow section) H900-1200mm / W5000-10000MM Striker Post - steel (square hollow section) Round Bar
FINISHES	Powder coated (unless otherwise specified)
COLOURS	White (unless otherwise specified)
SIZE (INDICATIVE)	Main Upright - DH65 x 4.5mm (CHS) Sleeve over Main Post - DN80 x 4.5mm (CHS) Collars welded over Main Post - DN80 x 4.5mm (CHS) Horizontal Pipe - DN50 x 3.5mm (flattened at one end) Diagonal Pipe - DN50 x 3.5mm (flattended at both ends) Sleeved Shoot Bar - 48mm diameter steel round bar x 600mm with welded 8mm eye bolt (refer to attached drawing)
VARIATIONS	As specified in a design brief
OPTIONS	
INSTALLATION INSTRUCTIONS	Footings - main post - D700 x W 350mm - striker post - D600mm x W250mm
DDA (Universal design principles)	NA
MAINTENANCE	As required
ENVIRONMENTAL	
EXPECTED LIFESPAN / END OF LIFE REPLACEMENT	Expected lifespan 15-20 years
FURTHER INFORMATION	Reflective tape 2 x striker posts 8mm galvanised chain x 300mm 50mm square domed tube caps
OTHER INFORMATION	Refer Page 3 and/or D21/50514
RELEVANT STANDARDS	

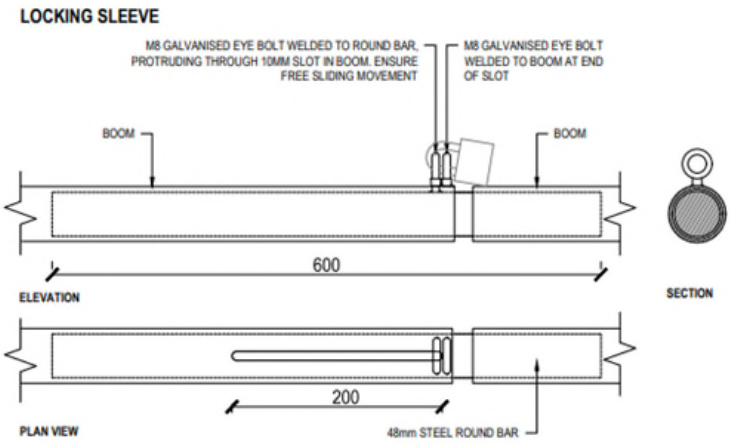

CITY OF TEA TREE GULLY