THE CITY OF TEA TREE GULLY

› Technical Specifications

SURFACES

DESCRIPTION: PAVEMENT - TYPICAL PAVEMENT SUBSOIL DRAINAGE

CODE: SUR19 29/04/2024

APPLICATIONS

Regional	●
District	●
Neighbourhood	●
Local	●
Main Roads	●
Local Roads	●


PERFORMANCE CRITERIA

IMAGE/S

Images are indicative of the style, not a specific brand. Council's procurement policy must be followed when selecting and purchasing items.

CITY OF TEA TREE GULLY

MATERIALS	
FINISHES	
COLOURS	
SIZE (INDICATIVE)	
VARIATIONS	
OPTIONS	
INSTALLATION INSTRUCTIONS	The drains shall be laid on a grade parallel to the finished surface. Where the subgrade is classified as being expansive, subsurface pavement drains shall be designed to be contained wholly within the capping layer. In addition, no part of the subsurface drainage trench shall be located within 150mm of the underlying subgrade. If necessary, the capping layer may have to be thickedned to satisfy this requirement.
DDA (Universal design principles)	
MAINTENANCE	
ENVIRONMENTAL	
EXPECTED LIFESPAN / END OF LIFE REPLACEMENT	
FURTHER INFORMATION	
OTHER INFORMATION	
RELEVANT STANDARDS	

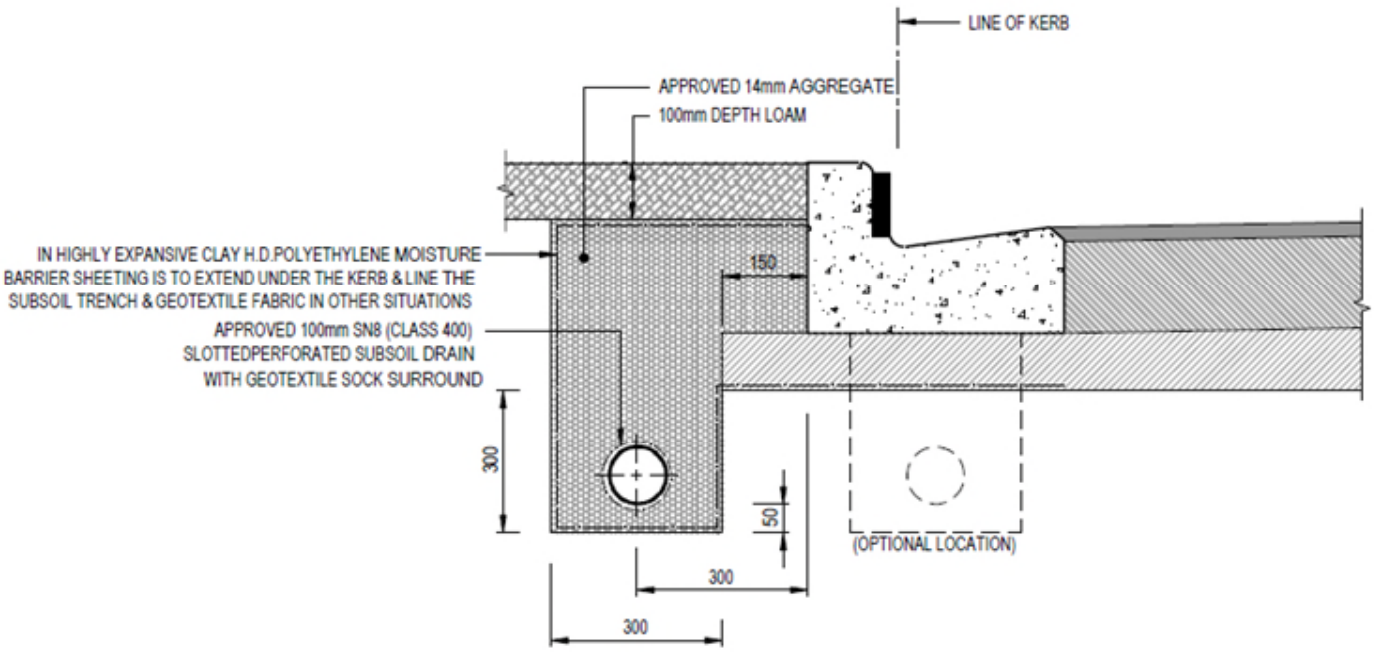

TYPICAL SECTION

ALL MEASUREMENTS IN MILLIMETRES

CITY OF TEA TREE GULLY