THE CITY OF TEA TREE GULLY

› Technical Specifications

CIVIL INFRASTRUCTURE

DESCRIPTION: PITS & DRAINAGE - OFFSET SIDE ENTRY PIT WITH 900MM INLET GRATE

CODE: CIV11 30/04/2025

APPLICATIONS	
	Regional
	District
	Neighbourhood
	Local
	Main Roads
	Local Roads


PERFORMANCE CRITERIA

IMAGE/S


Images are indicative of the style, not a specific brand. Council's procurement policy must be followed when selecting and purchasing items.

CITY OF TEA TREE GULLY

MATERIALS	
FINISHES	
COLOURS	
SIZE (INDICATIVE)	
VARIATIONS	
OPTIONS	
INSTALLATION INSTRUCTIONS	Precast lintel and grates approved by Council to be installed to manufacturers recommendations. Channel depth transition to be increased to 1200mm both sides at low point (SAG) locations.
DDA (Universal design principles)	
MAINTENANCE	
ENVIRONMENTAL	
EXPECTED LIFESPAN / END OF LIFE REPLACEMENT	
FURTHER INFORMATION	
OTHER INFORMATION	
RELEVANT STANDARDS	Class D load rating required for grate. Covers to be Class B or higher if likely to be driven over.

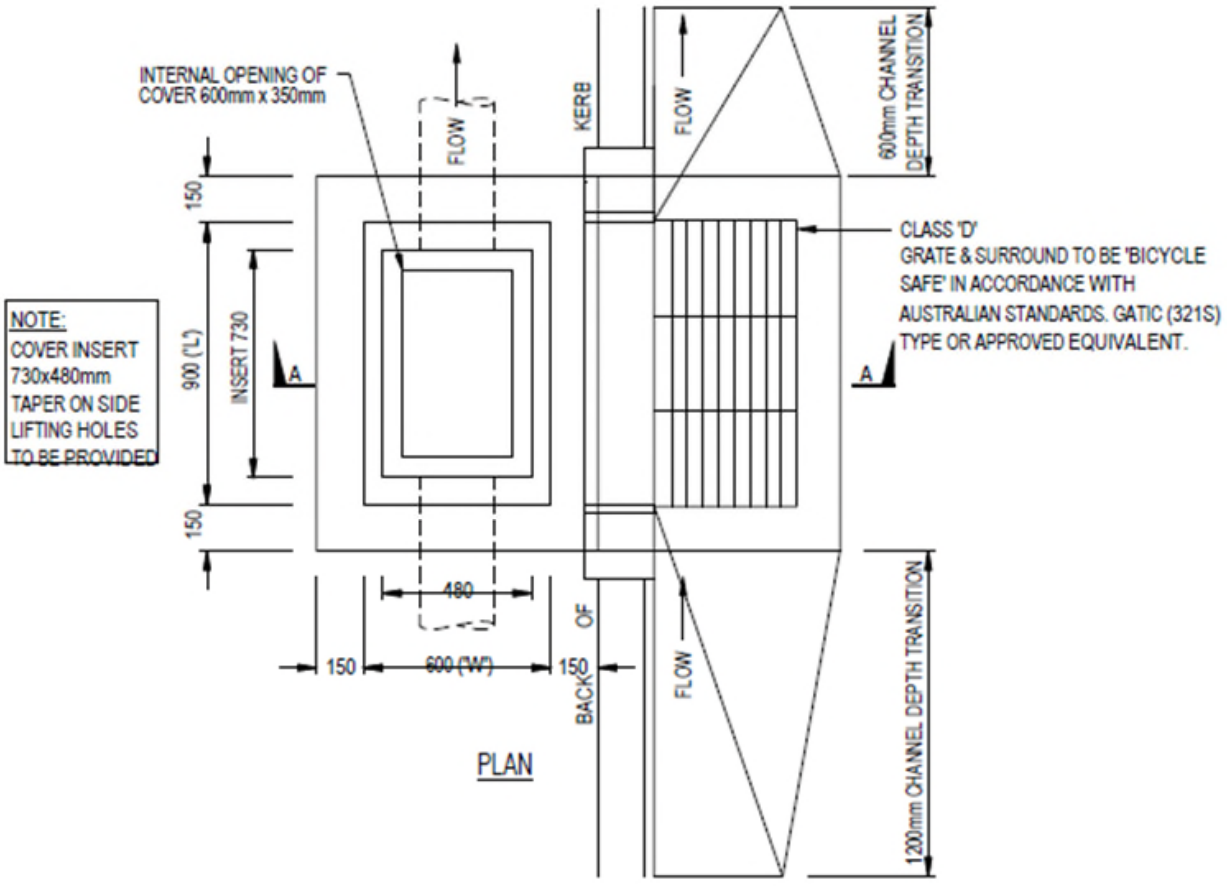

CITY OF TEA TREE GULLY

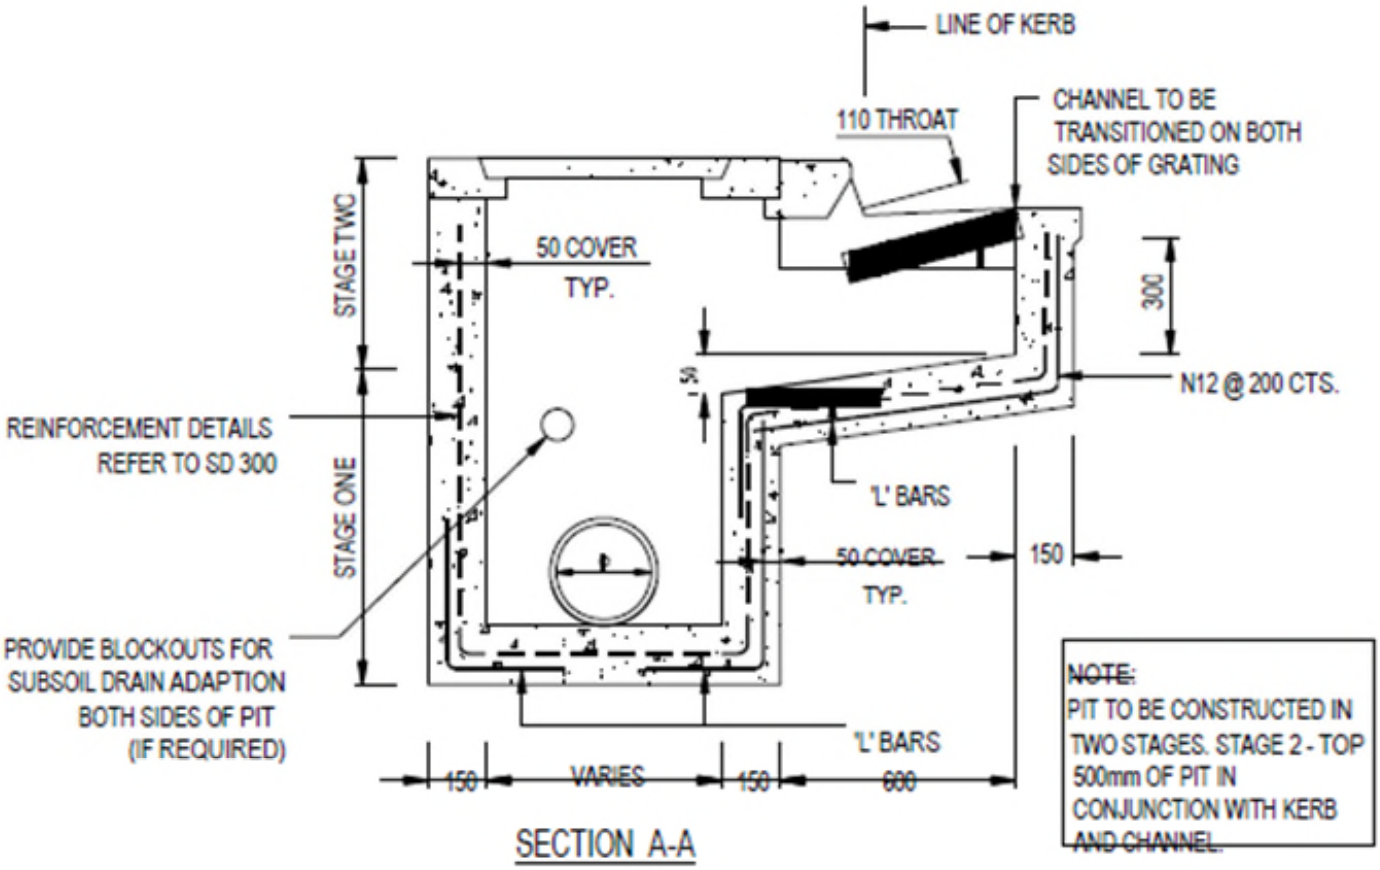

SECTION A-A

CITY OF TEA TREE GULLY