277 HANCOCK RD BANKSIA PARK SA 5091

Address:

Click to view a detailed interactive SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Overlay

Affordable Housing

Defence Aviation Area (All structures over 15 metres)

Hazards (Flooding)

Hazards (Flooding - Evidence Required)

Prescribed Wells Area

Regulated and Significant Tree

Stormwater Management

Traffic Generating Development

Urban Transport Routes

Urban Tree Canopy

Water Resources

Zone

General Neighbourhood

Selected Development(s)

_				
_		n	0	
	┖:		ι.	_

This development may be subject to multiple assessment pathways. Please review the document below to determine which pathway may be applicable based on the proposed development compliances to standards.

If no assessment pathway is shown this mean the proposed development will default to performance assessed. Please contact your local council in this instance. Refer to Part 1 - Rules of Interpretation - Determination of Classes of Development

Property Policy Information for above selection

Fence - Code Assessed - Performance Assessed

Part 2 - Zones and Sub Zones

Page 1 of 8 Printed on 16/12/2021

General Neighbourhood Zone

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Low-rise, low and medium-density housing that supports a range of needs and lifestyles located within easy reach of services and facilities. Employment and community service uses contribute to making the neighbourhood a convenient place to live without compromising residential amenity.		

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class of Development	Exceptions
(Column A)	(Column B)
 A kind of development which, in the opinion of relevant authority, is of a minor nature only an unreasonably impact on the owners or occupi in the locality of the site of the development. 	d will not None specified.
2. All development undertaken by: (a) the South Australian Housing Trust e individually or jointly with other person bodies or (b) a provider registered under the Community Housing National Law participating in program relating to the renewal of how endorsed by the South Australian Housing.	1. residential flat building(s) of 3 or more building levels 2. the demolition of a State or Local Heritage Place munity a Historic Area Overlay.
3. Any development involving any of the following combination of any of the following): (a) air handling unit, air conditioning sysexhaust fan (b) ancillary accommodation (c) building work on railway land (d) carport (e) deck (f) dwelling (g) dwelling addition (h) fence (i) outbuilding (j) pergola (k) private bushfire shelter	Except development that:

Page 2 of 8 Printed on 16/12/2021

1 Olicy24 - Eriquiry		
(q) student acco(r) supported according	II cility oltaic panels (roof mounted) mmodation	post) abuts an existing wall or structure of greater height on the adjoining allotment).
4. Any development invocombination of any of (a) consulting ro (b) office (c) shop.	=-	Except development that: 1. does not satisfy any of the following: (a) General Neighbourhood Zone DTS/DPF 1.4 (b) General Neighbourhood Zone DTS/DPF 4.1 or 2. involves a building wall (or structure) that is proposed to be situated on a side boundary (not being a boundary with a primary street or secondary street) and: (a) the length of the proposed wall (or structure) exceeds 11.5m (other than where the proposed wall abuts an existing wall or structure of greater length on the adjoining allotment) or (b) the height of the proposed wall (or post height) exceeds 3m measured from the top of footings (other than where the proposed wall (or post) abuts an existing wall or structure of greater height on the adjoining allotment).
combination of any of (a) internal build (b) land division (c) recreation ar (d) replacement (e) temporary act by bushfire (f) tree damagin	rea building commodation in an area affected g activity.	None specified. Except development that does not satisfy General Neighbourhood
(a) community f	ombination of any of the following): acility establishment	Zone DTS/DPF 1.5.
7. Demonuori.		 Except any of the following: the demolition of a State or Local Heritage Place the demolition of a building (except an ancillary building) in a Historic Area Overlay.

Page 3 of 8 Printed on 16/12/2021

Placement of Notices - Exemptions for Performance Assessed Development

None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

Part 3 - Overlays

Defence Aviation Area Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Management of potential impacts of buildings on the operational and safety requirements of Defence Aviation Areas.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built Form	
PO 1.1	DTS/DPF 1.1
Building height does not pose a hazard to the operations of Defence Aviation Areas.	Building height does not exceed the relevant height specified by the Defence Aviation Area Overlay.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Hazards (Flooding) Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Impacts on people, property, infrastructure and the environment from high flood risk are minimised by retaining areas free from development, and minimising intensification where development has occurred.

Page 4 of 8 Printed on 16/12/2021

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Flood R	esilience
PO 3.6	DTS/DPF 3.6
Fences do not unreasonably impede floodwaters.	A post and wire fence (other than a chain mesh fence).

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Urban Transport Routes Overlay


Assessment Provisions (AP)

Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes for all road users.	
DO 2	Provision of safe and efficient access to and from Urban Transport Routes.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Corner Cut-Offs		
PO 10.1 Development is located and designed to maintain sightlines for drivers turning into and out of public road junctions to contribute to driver safety.	DTS/DPF 10.1 Development does not involve building work, or building work is located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram:	

Page 5 of 8 Printed on 16/12/2021

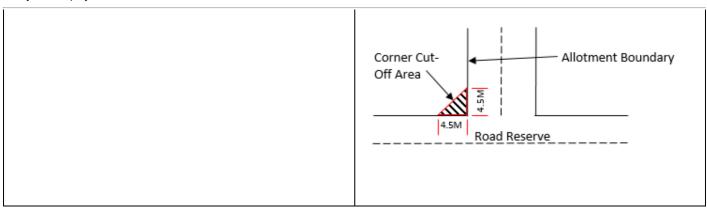

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Water Resources Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Protection of the quality of surface waters considering adverse water quality impacts associated with projected reductions in rainfall and warmer air temperatures as a result of climate change.		
DO 2	Maintain the conveyance function and natural flow paths of watercourses to assist in the management of flood waters and stormwater runoff.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance

Page 6 of 8 Printed on 16/12/2021

	Feature
Water C	atchment
PO 1.1	DTS/DPF 1.1
Watercourses and their beds, banks, wetlands and floodplains (1% AEP flood extent) are not damaged or modified and are retained in their natural state, except where modification is required for essential access or maintenance purposes.	None are applicable.
PO 1.4	DTS/DPF 1.4
Watercourses, areas of remnant native vegetation, or areas prone to erosion that are capable of natural regeneration are fenced off to limit stock access.	None are applicable.
PO 1.7	DTS/DPF 1.7
Watercourses, floodplains (1% AEP flood extent) and wetlands protected and enhanced by retaining and protecting existing native vegetation.	None are applicable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Part 4 - General Development Policies

Clearance from Overhead Powerlines

Assessment Provisions (AP)

Desired Outcome		
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied: (a) a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the Electricity Act 1996

Page 7 of 8 Printed on 16/12/2021

(b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.
--

Design in Urban Areas

Assessment Provisions (AP)

Desired Outcome			
DO 1	Development is:		
	(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality	
	(b)	durable - fit for purpose, adaptable and long lasting	
	(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors	
	(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.	

Performance Outcome Designated Performance Feature All Development Fences and walls PO 9.1 Fences, walls and retaining walls of sufficient height maintain privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places. Designated Performance Feature DTS/DPF 9.1 None are applicable.


Page 8 of 8 Printed on 16/12/2021

277 HANCOCK RD BANKSIA PARK SA 5091

Address:

Click to view a detailed interactive SAILIS

To view a detailed interactive property map in SAPPA click on the map below

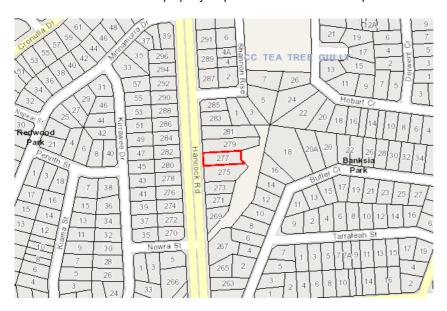

Property Zoning Details

Overlay

Affordable Housing

Defence Aviation Area (All structures over 15 metres)

Hazards (Flooding)

Hazards (Flooding - Evidence Required)

Prescribed Wells Area

Regulated and Significant Tree

Stormwater Management

Traffic Generating Development

Urban Transport Routes

Urban Tree Canopy

Water Resources

Zone

General Neighbourhood

Selected Development(s)

Retaining wall

This development may be subject to multiple assessment pathways. Please review the document below to determine which pathway may be applicable based on the proposed development compliances to standards.

If no assessment pathway is shown this mean the proposed development will default to performance assessed. Please contact your local council in this instance. Refer to Part 1 - Rules of Interpretation - Determination of Classes of Development

Property Policy Information for above selection

Retaining wall - Code Assessed - Performance Assessed

Part 2 - Zones and Sub Zones

Page 1 of 7 Printed on 16/12/2021

General Neighbourhood Zone

Assessment Provisions (AP)

Desired Outcome		
DO 1	Low-rise, low and medium-density housing that supports a range of needs and lifestyles located within easy reach of services and facilities. Employment and community service uses contribute to making the neighbourhood a convenient place to live without compromising residential amenity.	

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class of Development	Exceptions
(Column A)	(Column B)
 A kind of development which, in the opinion relevant authority, is of a minor nature only unreasonably impact on the owners or occ in the locality of the site of the development 	and will not upiers of land None specified.
2. All development undertaken by: (a) the South Australian Housing Trus individually or jointly with other per bodies or (b) a provider registered under the Control Housing National Law participating program relating to the renewal of endorsed by the South Australian Trust.	1. residential flat building(s) of 3 or more building levels 2. the demolition of a State or Local Heritage Place 3. the demolition of a building (except an ancillary building) in a Historic Area Overlay.
3. Any development involving any of the follow combination of any of the following): (a) air handling unit, air conditioning sexhaust fan (b) ancillary accommodation (c) building work on railway land (d) carport (e) deck (f) dwelling (g) dwelling addition (h) fence (i) outbuilding (j) pergola (k) private bushfire shelter	Except development that:

Page 2 of 7 Printed on 16/12/2021

 (I) residential flat building (m) retaining wall (n) retirement facility (o) shade sail (p) solar photovoltaic panels (roof mounted) (q) student accommodation (r) supported accommodation (s) swimming pool or spa pool (t) verandah (u) water tank. 	post) abuts an existing wall or structure of greater height on the adjoining allotment).
4. Any development involving any of the following (or of any combination of any of the following): (a) consulting room (b) office (c) shop.	 does not satisfy any of the following: (a) General Neighbourhood Zone DTS/DPF 1.4 (b) General Neighbourhood Zone DTS/DPF 4.1 or involves a building wall (or structure) that is proposed to be situated on a side boundary (not being a boundary with a primary street or secondary street) and: (a) the length of the proposed wall (or structure) exceeds 11.5m (other than where the proposed wall abuts an existing wall or structure of greater length on the adjoining allotment) or (b) the height of the proposed wall (or post height) exceeds 3m measured from the top of footings (other than where the proposed wall (or post) abuts an existing wall or structure of greater height on the adjoining allotment).
 5. Any development involving any of the following (or of any combination of any of the following): (a) internal building works (b) land division (c) recreation area (d) replacement building (e) temporary accommodation in an area affected by bushfire (f) tree damaging activity. 6. Alteration of or addition to any development involving the following (or of any combination of any of the following): (a) community facility (b) educational establishment 	None specified. Except development that does not satisfy General Neighbourhood Zone DTS/DPF 1.5.
(c) pre-school. 7. Demolition.	Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.

Page 3 of 7 Printed on 16/12/2021

Placement of Notices - Exemptions for Performance Assessed Development

None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

Part 3 - Overlays

Hazards (Flooding) Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Impacts on people, property, infrastructure and the environment from high flood risk are minimised by retaining areas free from development, and minimising intensification where development has occurred.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Site Ear	rthworks
PO 5.1	DTS/DPF 5.1
The depth and extent of filling required to raise the finished floor level of a building does not cause unacceptable impact on any adjoining property by diversion of flood waters, an increase in flood velocity or flood level, or an unacceptable loss of flood storage.	None are applicable.
PO 5.2	DTS/DPF 5.2
Driveways, access tracks and parking areas are designed and constructed to minimise excavation and filling.	Filling for ancillary purposes: (a) does not exceed 300mm above existing ground level (b) is no more than 5m wide.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Page 4 of 7 Printed on 16/12/2021

Urban Transport Routes Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes for all road users.		
DO 2	Provision of safe and efficient access to and from Urban Transport Routes.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Deemed-to-Satisfy Criteria / **Performance Outcome Designated Performance Feature** Public Road Junctions PO 9.1 DTS/DPF 9.1 New junctions with a public road (including the opening of unmade Development does not comprise any of the following: public road junctions) or modifications to existing road junctions are (a) creating a new junction with a public road located and designed to ensure safe operating conditions are (b) maintained on the State Maintained Road. opening an unmade public road junction (c) modifying an existing public road junction.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Water Resources Overlay

Assessment Provisions (AP)

Page 5 of 7 Printed on 16/12/2021

	Desired Outcome			
DO 1	Protection of the quality of surface waters considering adverse water quality impacts associated with projected reductions in rainfall and warmer air temperatures as a result of climate change.			
DO 2	Maintain the conveyance function and natural flow paths of watercourses to assist in the management of flood waters and stormwater runoff.			

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Water C	atchment
PO 1.1	DTS/DPF 1.1
Watercourses and their beds, banks, wetlands and floodplains (1% AEP flood extent) are not damaged or modified and are retained in their natural state, except where modification is required for essential access or maintenance purposes.	None are applicable.
PO 1.5	DTS/DPF 1.5
Development that increases surface water run-off includes a suitably sized strip of vegetated land on each side of a watercourse to filter runoff to:	A strip of land 20m or more wide measured from the top of existing banks on each side of the watercourse is free from development, livestock use and revegetated with locally indigenous vegetation.
(a) reduce the impacts on native aquatic ecosystems (b) minimise soil loss eroding into the watercourse.	
PO 1.7	DTS/DPF 1.7
Watercourses, floodplains (1% AEP flood extent) and wetlands protected and enhanced by retaining and protecting existing native vegetation.	None are applicable.
PO 1.8	DTS/DPF 1.8
Watercourses, floodplains (1% AEP flood extent) and wetlands are protected and enhanced by stabilising watercourse banks and reducing sediments and nutrients entering the watercourse.	None are applicable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Page 6 of 7 Printed on 16/12/2021

Part 4 - General Development Policies

Design in Urban Areas

Assessment Provisions (AP)

	Desired Outcome		
	DO 1 Development is:		
(a) contextual - by considering, recognising and carefully responding to its natural surroundings or built en and positively contributing to the character of the locality		contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality	
(b) durable - fit for purpose, adaptable and long lasting		(b)	durable - fit for purpose, adaptable and long lasting
access and promoting the provision of quality spaces integrate		(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors
		(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Performance Outcome Deemed-to-Satisfy Criteria / **Designated Performance Feature** All Development Fences and walls PO 9.1 DTS/DPF 9.1 Fences, walls and retaining walls of sufficient height maintain None are applicable. privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places. PO 9.2 DTS/DPF 9.2 Landscaping is incorporated on the low side of retaining walls that A vegetated landscaped strip 1m wide or more is provided against are visible from public roads and public open space to minimise the low side of a retaining wall. visual impacts.

Page 7 of 7 Printed on 16/12/2021

277 HANCOCK RD BANKSIA PARK SA 5091

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Overlay

Affordable Housing

Defence Aviation Area (All structures over 15 metres)

Hazards (Flooding)

Hazards (Flooding - Evidence Required)

Prescribed Wells Area

Regulated and Significant Tree

Stormwater Management

Traffic Generating Development

Urban Transport Routes

Urban Tree Canopy

Water Resources

Zone

General Neighbourhood

Selected Development(s)

Outbuilding

This development may be subject to multiple assessment pathways. Please review the document below to determine which pathway may be applicable based on the proposed development compliances to standards.

If no assessment pathway is shown this mean the proposed development will default to performance assessed. Please contact your local council in this instance. Refer to Part 1 - Rules of Interpretation - Determination of Classes of Development

Property Policy Information for above selection

Outbuilding - Code Assessed - Performance Assessed

Part 2 - Zones and Sub Zones

Page 1 of 18 Printed on 16/12/2021

General Neighbourhood Zone

Assessment Provisions (AP)

Desired Outcome		
DO 1	Low-rise, low and medium-density housing that supports a range of needs and lifestyles located within easy reach of services and facilities. Employment and community service uses contribute to making the neighbourhood a convenient place to live without compromising residential amenity.	

Danfarmanaa Outaana	Decreed to Catiofy Oritoria
Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance
	Feature
Site 0	Coverage
PO 3.1	DTS/DPF 3.1
Building footprints allow sufficient space around buildings to limit visual impact, provide an attractive outlook and access to light and ventilation.	The development does not result in site coverage exceeding 60%.
Ancillary Buildir	ngs and Structures
P0 11.1	DTS/DPF 11.1
Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or neighbouring properties.	(a) are ancillary to a dwelling erected on the same site (b) have a floor area not exceeding 60m2 (c) are not constructed, added to or altered so that any part is situated: (i) in front of any part of the building line of the dwelling to which it is ancillary or (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads) (d) in the case of a garage or carport, the garage or carport: (i) is set back at least 5.5m from the boundary of the primary street (ii) have a door / opening not exceeding: A. for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser B. for dwellings comprising two or more building levels at the building line fronting the same public street - 7m in width
	(e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless: (i) a longer wall or structure exists on the adjacent

Page 2 of 18 Printed on 16/12/2021

a longer wall or structure exists on the adjacent site and is situated on the same allotment

boundary and

- (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height (or post height) not exceeding 3m
- (i) have a roof height where no part of the roof is more than 5m above the natural ground level
- (j) if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
- (i) a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%
>450	25%

(ii) the amount of existing soft landscaping prior to the development occurring.

PO 11.2

Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements or result in over-development of the site.

DTS/DPF 11.2

Ancillary buildings and structures do not result in:

- (a) less private open space than specified in Design in Urban Areas Table 1 Private Open Space
- (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

Page 3 of 18 Printed on 16/12/2021

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class	of Development	Exceptions
(Colun	nn A)	(Column B)
1.	A kind of development which, in the opinion relevant authority, is of a minor nature only a unreasonably impact on the owners or occuland in the locality of the site of the develop	and will not upiers of None specified.
	All development undertaken by: (a) the South Australian Housing Trust individually or jointly with other persodules or (b) a provider registered under the Con Housing National Law participating program relating to the renewal of lendorsed by the South Australian Houst. Any development involving any of the follow	1. residential flat building(s) of 3 or more building levels 2. the demolition of a State or Local Heritage Place 3. the demolition of a building (except an ancillary building) in a Historic Area Overlay. Sing (or of
3.	any combination of any of the following): (a) air handling unit, air conditioning syexhaust fan (b) ancillary accommodation (c) building work on railway land (d) carport (e) deck (f) dwelling (g) dwelling addition (h) fence (i) outbuilding (j) pergola (k) private bushfire shelter (l) residential flat building (m) retaining wall (n) retirement facility (o) shade sail (p) solar photovoltaic panels (roof mode) (q) student accommodation (r) supported accommodation (s) swimming pool or spa pool (t) verandah (u) water tank.	1. does not satisfy General Neighbourhood Zone DTS/DPF 4.1 or 2. involves a building wall (or structure) that is proposed to be situated on a side boundary (not being a boundary with a primary street or secondary street) and: (a) the length of the proposed wall (or structure) exceeds 11.5m (other than where the proposed wall abuts an existing wall or structure of greater length on the adjoining allotment) or (b) the height of the proposed wall (or post height) exceeds 3m measured from the top of footings (other than where the proposed wall (or post) abuts an existing wall or structure of greater height on the adjoining allotment).
4.	Any development involving any of the follow any combination of any of the following): (a) consulting room (b) office (c) shop.	Except development that: 1. does not satisfy any of the following: (a) General Neighbourhood Zone DTS/DPF 1.4 (b) General Neighbourhood Zone DTS/DPF 4.1

Page 4 of 18 Printed on 16/12/2021

2. involves a building wall (or structure) that is proposed to be situated on a side boundary (not being a boundary with a primary street or secondary street) and: (a) the length of the proposed wall (or structure) exceeds 11.5m (other than where the proposed wall abuts an existing wall or structure of greater length on the adjoining allotment) (b) the height of the proposed wall (or post height) exceeds 3m measured from the top of footings (other than where the proposed wall (or post) abuts an existing wall or structure of greater height on the adjoining allotment). 5. Any development involving any of the following (or of None specified. any combination of any of the following): (a) internal building works (b) land division (c) recreation area (d) replacement building (e) temporary accommodation in an area affected by bushfire (f) tree damaging activity. 6. Alteration of or addition to any development involving Except development that does not satisfy General Neighbourhood the following (or of any combination of any of the Zone DTS/DPF 1.5. following): (a) community facility (b) educational establishment (c) pre-school. 7. Demolition. Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.

Placement of Notices - Exemptions for Performance Assessed Development

None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

Part 3 - Overlays

Defence Aviation Area Overlay

Assessment Provisions (AP)

Page 5 of 18 Printed on 16/12/2021

	Desired Outcome
DO 1	Management of potential impacts of buildings on the operational and safety requirements of Defence Aviation Areas.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
PO 1.1	DTS/DPF 1.1
Building height does not pose a hazard to the operations of Defence Aviation Areas.	Building height does not exceed the relevant height specified by the Defence Aviation Area Overlay.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Hazards (Flooding) Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Impacts on people, property, infrastructure and the environment from high flood risk are minimised by retaining areas free from development, and minimising intensification where development has occurred.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Flood R	esilience
PO 3.1	DTS/DPF 3.1
Development avoids the need for flood protection works.	None are applicable.
PO 3.2	DTS/DPF 3.2
Development does not cause unacceptable impacts on any adjoining property by the diversion of flood waters or an increase in flood velocity or flood level.	None are applicable.

Page 6 of 18 Printed on 16/12/2021

P0 3.3	DTS/DPF 3.3
Development does not impede the flow of floodwaters through the allotment or the surrounding land, or cause an unacceptable loss of flood storage.	None are applicable.
PO 3.4	DTS/DPF 3.4
Development avoids frequently flooded or high velocity areas, other than where it is part of a flood mitigation scheme to reduce flood impact.	Other than a recreation area, development is located outside of the 5% AEP principal flow path.
Environmen	tal Protection
P0 4.1	DTS/DPF 4.1
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building during a 1% AEP flood event to avoid potential environmental harm.	Development involving the storage or disposal of hazardous materials is wholly located outside of the 1% AEP flood plain or flow path.
PO 4.2	DTS/DPF 4.2
Development does not create or aggravate the potential for erosion or siltation or lead to the destruction of vegetation during a flood.	None are applicable.
Site Eal	rthworks
PO 5.1	DTS/DPF 5.1
The depth and extent of filling required to raise the finished floor level of a building does not cause unacceptable impact on any adjoining property by diversion of flood waters, an increase in flood velocity or flood level, or an unacceptable loss of flood storage.	None are applicable.
PO 5.2	DTS/DPF 5.2
Driveways, access tracks and parking areas are designed and constructed to minimise excavation and filling.	Filling for ancillary purposes: (a) does not exceed 300mm above existing ground level (b) is no more than 5m wide.
Access	
PO 6.1	DTS/DPF 6.1
Development does not occur on land:	None are applicable.
 (a) from which evacuation to areas not vulnerable to flood risk is not possible during a 1% AEP flood event (b) which cannot be accessed by emergency services vehicles or essential utility service vehicles during a 1% AEP flood event. 	
PO 6.2	DTS/DPF 6.2
Access driveways and tracks to significant development (i.e. dwellings, places of work, etc.) consist of a safe, all-weather trafficable surface that is accessible during a 1% AEP flood	None are applicable.

Page 7 of 18 Printed on 16/12/2021

event.	

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	-	Statutory Reference
None	None	None	None

Urban Transport Routes Overlay

Assessment Provisions (AP)

	Desired Outcome	
DO 1	Safe and efficient operation of Urban Transport Routes for all road users.	
DO 2	Provision of safe and efficient access to and from Urban Transport Routes.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
	Access - Safe Entry and Exit (Traffic Flow)
PO 1.1	DTS/DPF 1.1
Access is designed to allow safe entry and exit to and from a site to meet the needs of development and minimise traffic flow interference associated with access movements along adjacent State maintained roads.	An access point satisfies (a), (b) or (c): (a) where servicing a single (1) dwelling / residential allotment: (i) it will not result in more than one access point (ii) vehicles can enter and exit the site in a forward direction (iii) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees (iv) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road (v) it will have a width of between 3m and 4m (measured at the site boundary) (b) where the development will result in 2 and up to 6 dwellings: (i) (i) it will not result in more than one access point servicing the development site (ii) vehicles can enter and exit the site in a forward direction (iii) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees (iv) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road (v) it will have a width of between 5.8m to 6m (measured at the site boundary) and an access depth of 6m (measured from the site

Page 8 of 18 Printed on 16/12/2021

- (c) where the development will result in 7 or more dwellings, or is a non-residential land use:
 - it will not result in more than one access point servicing the development site
 - (ii) vehicles can enter and exit the site using left turn only movements
 - (iii) vehicles can enter and exit the site in a forward direction
 - (iv) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
 - (v) it will have a width of between 6m and 7m (measured at the site boundary), where the development is expected to accommodate vehicles with a length of 6.4m or less
 - (vi) it will have a width of between 6m and 9m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 6.4m to 8.8m
 - (vii) it will have a width of between 9m and 12m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 8.8m to 12.5m
 - (Viii) provides for simultaneous two-way vehicle movements at the access:
 - A. with entry and exit movements for vehicles with a length up to 5.2m vehicles being fully within the kerbside lane of the road

and

B. with entry movements of 8.8m vehicles (where relevant) being fully within the kerbside lane of the road and the exit movements of 8.8m vehicles do not cross the centreline of the road.

Access - On-Site Queuing


PO 2.1

Sufficient accessible on-site queuing adjacent to access points is provided to meet the needs of development so that all vehicle queues can be contained fully within the boundaries of the development site, to minimise interruption on the functional performance of the road and maintain safe vehicle movements.

DTS/DPF 2.1

An access point in accordance with one of the following:


(a) will not service, or is not intended to service, more than 6 dwellings and there are no internal driveways, intersections, car parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site) as shown in the following diagram:



- (b) will service, or is intended to service, development that will generate less than 60 vehicle movements per day, and:
 - (i) is expected to be serviced by vehicles with a length no greater than 6.4m
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)

Page 9 of 18 Printed on 16/12/2021

- (c) will service, or is intended to service, development that will generate less than 60 vehicle movements per day, and:
 - (i) is expected to be serviced by vehicles with a length greater than a 6.4m small rigid vehicle
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)
 - (iii) any termination of or change in priority of movement within the main car park aisle is located far enough into the site so that the largest vehicle expected on-site can store fully within the site before being required to stop
 - (iv) all parking or manoeuvring areas for commercial vehicles are located a minimum of 12m or the length of the longest vehicle expected on site from the access (measured from the site boundary into the site) as shown in the following diagram:



Access - (Location Spacing) - Existing Access Point

PO 3.1

Existing access points are designed to accommodate the type and volume of traffic likely to be generated by the development.

DTS/DPF 3.1

An existing access point satisfies (a), (b) or (c):

- (a) it will not service, or is not intended to service, more than 6 dwellings
- (b) it is not located on a Controlled Access Road and will not service development that will result in (b) a larger class of vehicle expected to access the site using the existing access
- (c) is not located on a Controlled Access Road and development constitutes:
 - (i) a change of use between an office <500m² gross leasable floor area and a consulting room <500m² gross leasable floor area or vice versa
 - (ii) a change in use from a shop to an office, consulting room or personal or domestic services establishment
 - (iii) a change of use from a consulting room or office <250m² gross leasable floor area to shop <250m² gross leasable floor area
 - (iv) a change of use from a shop <500m² gross leasable floor area to a warehouse <500m² gross leasable floor area
 - an office or consulting room with a <500m² gross leasable floor area.

Access - Location (Spacing) - New Access Points

PO 4.1

New access points are spaced apart from any existing access point or public road junction to manage impediments to traffic

DTS/DPF 4.1


A new access point satisfies (a), (b) or (c):

(a) where a development site is intended to serve between 1 and 6 dwellings and

Page 10 of 18 Printed on 16/12/2021

flow and maintain safe and efficient operating conditions on the road.

has frontage to a local road (not being a Controlled Access Road) with a speed environment of 60km/h or less, the new access point is provided on the local road and located a minimum of 6.0m from the tangent point as shown in the following diagram:



NOTE

The points marked X_1 and X are respectively at the median end on a divided road and at the intersection of the main road centre-line and the extensions of the side road property lines shown as dotted lines, on an undivided road. On a divided road, dimension Y = X extends to Point Y_1 .

- (b) where the development site is intended to serve between 1 and 6 dwellings and access from a local road (being a road that is not a State Maintained Road) is not available, the new access:
 - (i) is not located on a Controlled Access Road
 - (ii) is not located on a section of road affected by double barrier lines
 - (iii) will be on a road with a speed environment of 70km/h or less
 - (iv) is located outside of the bold lines on the diagram shown in the diagram following part (a)
 - (v) located minimum of 6m from a median opening or pedestrian crossing
- (c) where DTS/DPF 4.1 part (a) and (b) do not apply and access from an alternative local road at least 25m from the State Maintained Road is not available, and the access is not located on a Controlled Access Road, the new access is separated in accordance with the following:

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes
50 km/h	No spacing	20m
or less	requirement	
60 km/h	30m	73m
70 km/h	40m	92m
80 km/h	50m	114m
90 km/h	65m	139m
100	80m	165m
km/h		
110	100m	193m
km/h		

Access - Location (Sight Lines)

PO 5.1


Access points are located and designed to accommodate sight lines that enable drivers and pedestrians to navigate potential conflict points with roads in a controlled and safe manner.

DTS/DPF 5.1


An access point satisfies (a) or (b):

(a) drivers approaching or exiting an access point have an unobstructed line of sight in accordance with the following (measured at a height of 1.1m above the surface of the road):

Speed Limit	Access point serving 1-6 dwellings	Access point serving all other development
40 km/h or	40m	73m
less		
50 km/h	55m	97m
60 km/h	73m	123m
70 km/h	92m	151m
80 km/h	114m	181m
90 km/h	139m	214m
100 km/h	165m	248m
110km/h	193m	285m



(b) pedestrian sightlines in accordance with the following diagram:

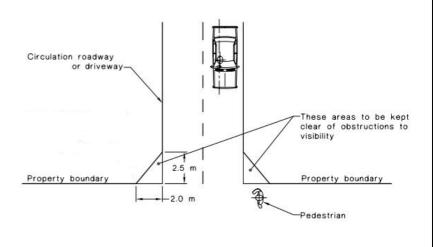

Access - Mud and Debris

PO 6.1

DTS/DPF 6.1

Access points constructed to minimise mud or other debris being carried or transferred onto the road to ensure safe road operating conditions.

Where the road has an unsealed shoulder and the road is not kerbed, the access way is sealed from the edge of seal on the road for a minimum of 10m or to the property boundary (whichever is closer).

Access - Stormwater

PO 7.1

DTS/DPF 7.1

Access points are designed to minimise negative impact on roadside drainage of water.

Development does not:

- (a) decrease the capacity of an existing drainage point
- (b) restrict or prevent the flow of stormwater through an existing drainage point and system.

Building on Road Reserve

PO 8.1

DTS/DPF 8.1

Buildings or structures that encroach onto,

Buildings or structures are not located on, above or below the road reserve.

Page 12 of 18 Printed on 16/12/2021

Policy24 - Enquiry	
above or below road reserves are designed and sited to minimise impact on safe movements by all road users.	
	Public Road Junctions
PO 9.1	DTS/DPF 9.1
New junctions with a public road (including the opening of unmade public road junctions) or modifications to existing road junctions are located and designed to ensure safe operating conditions are maintained on the State Maintained Road.	(a) creating a new junction with a public road (b) opening an unmade public road junction (c) modifying an existing public road junction.
	Corner Cut-Offs
PO 10.1	DTS/DPF 10.1
Development is located and designed to maintain sightlines for drivers turning into and out of public road junctions to contribute to driver safety.	Development does not involve building work, or building work is located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram:
	Corner Cut- Off Area 4.5M Road Reserve

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Page 13 of 18 Printed on 16/12/2021

deemed to be minor in the opinion of the		
relevant authority).		

Water Resources Overlay

Assessment Provisions (AP)

	Desired Outcome	
DO 1	Protection of the quality of surface waters considering adverse water quality impacts associated with projected reductions in rainfall and warmer air temperatures as a result of climate change.	
DO 2	Maintain the conveyance function and natural flow paths of watercourses to assist in the management of flood waters and stormwater runoff.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Water C	atchment
PO 1.1	DTS/DPF 1.1
Watercourses and their beds, banks, wetlands and floodplains (1% AEP flood extent) are not damaged or modified and are retained in their natural state, except where modification is required for essential access or maintenance purposes.	None are applicable.
P0 1.2	DTS/DPF 1.2
Development avoids interfering with the existing hydrology or water regime of swamps and wetlands other than to improve the existing conditions to enhance environmental values.	None are applicable.
PO 1.5	DTS/DPF 1.5
Development that increases surface water run-off includes a suitably sized strip of vegetated land on each side of a watercourse to filter runoff to: (a) reduce the impacts on native aquatic ecosystems (b) minimise soil loss eroding into the watercourse.	A strip of land 20m or more wide measured from the top of existing banks on each side of the watercourse is free from development, livestock use and revegetated with locally indigenous vegetation.
PO 1.6	DTS/DPF 1.6
Development resulting in the depositing or placing of an object or solid material in a watercourse or lake occurs only where it involves any of the following:	None are applicable.
(a) the construction of an erosion control structure	
(b) devices or structures used to extract or regulate water flowing in a watercourse	
(c) devices used for scientific purposes	
(d) the rehabilitation of watercourses.	
P0 1.7	DTS/DPF 1.7

Page 14 of 18 Printed on 16/12/2021

Watercourses, floodplains (1% AEP flood extent) and wetlands protected and enhanced by retaining and protecting existing native vegetation.	None are applicable.
PO 1.8	DTS/DPF 1.8
Watercourses, floodplains (1% AEP flood extent) and wetlands are protected and enhanced by stabilising watercourse banks and reducing sediments and nutrients entering the watercourse.	None are applicable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Part 4 - General Development Policies

Clearance from Overhead Powerlines

Assessment Provisions (AP)

Desired Outcome	
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied: (a) a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the Electricity Act 1996 (b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design in Urban Areas

Assessment Provisions (AP)

Desired Outcome

Page 15 of 18 Printed on 16/12/2021

DO 1

Development is:

- contextual by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality
- (b) durable - fit for purpose, adaptable and long lasting
- inclusive by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors
- (d) sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Performance Outcome

Deemed-to-Satisfy Criteria / Designated Performance

	Feature
All Deve	olopment
Earthworks ar	nd sloping land
PO 8.1	DTS/DPF 8.1
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more.
PO 8.2	DTS/DPF 8.2
Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
(a) do not contribute to the instability of embankments and cuttings	
(b) provide level transition areas for the safe movement of people and goods to and from the development	
(c) are designed to integrate with the natural topography of the land.	
PO 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on site drainage systems to minimise erosion.	None are applicable.
Residential Develo	Dopment - Low Rise

Car parking, access and manoeuvrability

Page 16 of 18 Printed on 16/12/2021

Policy24 - Enquiry PO 23 3 DTS/DPF 23.3 Driveways and access points are located and designed to Driveways and access points satisfy (a) or (b): facilitate safe access and egress while maximising land available sites with a frontage to a public road of 10m or less, for street tree planting, domestic waste collection, landscaped have a width between 3.0 and 3.2 metres measured at street frontages and on-street parking. the property boundary and are the only access point provided on the site (b) sites with a frontage to a public road greater than 10m: have a maximum width of 5m measured at the property boundary and are the only access point provided on the site; have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m. PO 23.4 DTS/DPF 23.4 Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees. (a) (b)

Vehicle access to designated car parking spaces satisfy (a) or

- is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land
- where newly proposed, is set back:
 - 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner
 - 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance
 - 6m or more from the tangent point of an intersection of 2 or more roads
 - (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.

PO 23.5

Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.

DTS/DPF 23.5

Driveways are designed and sited so that:

- the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1-in-4 on average
- (b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary.
- (c) if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

Page 17 of 18 Printed on 16/12/2021

Desired Outcome

DO 1

Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome Deemed-to-Satisfy Criteria / Designated Performance

Wastewater Services

PO 12.2

Effluent drainage fields and other wastewater disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.

DTS/DPF 12.2

Development is not built on, or encroaches within, an area that is, or will be, required for a sewerage system or waste control system.

Feature

Page 18 of 18 Printed on 16/12/2021

277 HANCOCK RD BANKSIA PARK SA 5091

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Overlay

Affordable Housing

Defence Aviation Area (All structures over 15 metres)

Hazards (Flooding)

Hazards (Flooding - Evidence Required)

Prescribed Wells Area

Regulated and Significant Tree

Stormwater Management

Traffic Generating Development

Urban Transport Routes

Urban Tree Canopy

Water Resources

Zone

General Neighbourhood

Development Pathways

General Neighbourhood

1. Accepted Development

Means that the development type does not require planning consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Air handling unit, air conditioning system or exhaust fan
- Building work on railway land
- Carport
- Internal building work
- · Shade sail
- Solar photovoltaic panels (roof mounted)
- Verandah
- Water tank (above ground)
- Water tank (underground)

Page 1 of 140 Printed on 16/12/2021

2. Code Assessed - Deemed to Satisfy

Means that the development type requires consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Carport
- · Temporary accommodation in an area affected by bushfire
- Verandah

3. Code Assessed - Performance Assessed

Performance Assessed development types listed below are those for which the Code identifies relevant policies. Additional development types that are not listed as Accepted, Deemed to Satisfy or Restricted default to a Performance assessed Pathway. Please contact your local council for more information.

- · Ancillary accommodation
- Carport
- Demolition
- · Detached dwelling
- · Dwelling addition
- Dwelling or residential flat building undertaken by:
 - (a) the South Australian Housing Trust either individually or jointly with other persons or bodies or
 - (b) a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.
- Fence
- Group dwelling
- · Land division
- Outbuilding
- · Residential flat building
- · Retaining wall
- Row dwelling
- · Semi-detached dwelling
- Tree-damaging activity
- Verandah

4. Impact Assessed - Restricted

Means that the development type requires approval. Classes of development that are classified as Restricted are listed in Table 4 of the relevant Zones.

Property Policy Information for above selection

Part 2 - Zones and Sub Zones

General Neighbourhood Zone

Assessment Provisions (AP)

Desired Outcome	
	Low-rise, low and medium-density housing that supports a range of needs and lifestyles located within easy reach of services and facilities. Employment and community service uses contribute to making the neighbourhood a convenient place to live without compromising residential amenity.

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome

Deemed-to-Satisfy Criteria /

Page 2 of 140 Printed on 16/12/2021

	Designated Performance
	Feature
Land Use and Intensity	
PO 1.1	DTS/DPF 1.1
Predominantly residential development with complementary non-residential uses that support an active, convenient, and walkable neighbourhood.	(a) Ancillary accommodation (b) Community facility (c) Consulting room (d) Dwelling (e) Educational establishment (f) Office (g) Place of Worship (h) Pre-school (i) Recreation area (j) Residential flat building (k) Retirement facility (l) Shop (m) Student accommodation (n) Supported accommodation
P0 1.2	DTS/DPF 1.2
Non-residential development located and designed to improve community accessibility to services, primarily in the form of: (a) small scale commercial uses such as offices, shops and consulting rooms (b) community services such as educational establishments, community centres, places of worship, pre-schools, and other health and welfare services (c) services and facilities ancillary to the function or operation of supported accommodation or retirement facilities (d) open space and recreation facilities.	None are applicable.
PO 1.3	DTS/DPF 1.3
Non-residential development sited and designed to complement the residential character and amenity of the neighbourhood.	None are applicable.
PO 1.4	DTS/DPF 1.4
Commercial activities improve community access to services are of a scale and type to maintain residential amenity.	A shop, consulting room or office (or any combination thereof) satisfies any one of the following: (a) it is located on the same allotment and in conjunction with a dwelling where all the following are satisfied: (i) does not exceed 50m² gross leasable floor area (ii) does not involve the display of goods in a window or about the dwelling or its curtilage (b) it reinstates a former shop, consulting room or office in an existing building (or portion of a building) and satisfies one of the following: (i) the building is a State or Local Heritage Place (ii) is in conjunction with a dwelling and there is no

Page 3 of 140 Printed on 16/12/2021

increase in the gross leasable floor area previously used for non-residential purposes

- (c) is located more than 500m from an Activity Centre and satisfies one of the following:
 - does not exceed 100m² gross leasable floor area (individually or combined, in a single building) where the site does not have a frontage to a State Maintained Road
 - (ii) does not exceed 200m² gross leasable floor area (individually or combined, in a single building) where the site has a frontage to a State Maintained Road
- (d) the development site abuts an Activity Centre and all the following are satisfied:
 - it does not exceed 200m² gross leasable floor area (individually or combined, in a single building)
 - (ii) the proposed development will not result in a combined gross leasable floor area (existing and proposed) of all shops, consulting rooms and offices that abut the Activity Centre in this zone exceeding the lesser of the following:
 - A. 50% of the existing gross leasable floor area within the Activity Centre
 - B. 1000m².

PO 1.5

Expansion of existing community services such as educational establishments, community facilities and pre-schools in a manner which complements the scale of development envisaged by the desired outcome for the neighbourhood.

DTS/DPF 1.5

Alteration of or addition to existing educational establishments, community facilities or pre-schools where all the following are satisfied:

- (a) set back at least 3m from any boundary shared with a residential land use
- (b) building height not exceeding 1 building level
- (c) the total floor area of the building not exceeding 150% of the total floor area prior to the addition/alteration
- (d) off-street vehicular parking exists or will be provided in accordance with the rate(s) specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas to the nearest whole number.

Site Dimensions and Land Division

PO 2.1

Allotments/sites created for residential purposes are of suitable size and dimension to accommodate the anticipated dwelling form and remain compatible with the pattern of development in a low-rise and predominantly low-density neighbourhood, with higher densities closer to public open space, public transport stations and activity centres.

DTS/DPF 2.1

Development will not result in more than 1 dwelling on an existing allotment

OI

Allotments/sites for residential purposes accord with the following:

Dwelling Type	Minimum	Minimum
	site/allotment area	site/allotment
	per dwelling	frontage

Page 4 of 140 Printed on 16/12/2021

1 Olloy 24 - Enquiry				
	Detached dwelling (not in a terrace arrangement)	300m ² (exclusive of any battle-axe allotment 'handle')	9m where not on a battle- axe site 5m where on a battle-axe	
		1000 2	site	
	Semi-detached dwelling	300m ²	9m	
	Row dwelling (or	250m ²	7m	
	detached dwelling in a		(averaged)	
	terrace arrangement)		, ,	
	Group dwelling	300m ² (average,	15m (total)	
		including common areas)	(1111)	
	Dwelling within a residential flat building	300m² (average, including common areas)	15m (total)	
P0 2.2	DTS/DPF 2.2			
Development creating new allotments/sites in conjunction with retention of an existing dwelling ensures the site of the existing dwelling remains fit for purpose.	Where the site of a dwelling does not comprise an entire			
	frontage require	ne allotment accords wi ments specified in Geno Zone DTS/DPF 2.1		
	remain on the al	sting dwelling on the allo lotment after completic will not contravene:		
	(i) Private open space requirements specified in Design in Urban Areas Table 1 - Private Open Space		•	
	(ii) off-stree with the and Parl Parking Parking	·		
PO 2.3	DTS/DPF 2.3			
Land division results in sites that are accessible and suitable for their intended purpose.	Division of land satisfies	(a), (b) or (c):		
	(a) reflects the site boundaries illustrated and approved in an existing development authorisation under the Development Act 1993 or Planning, Development and Infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes		under the elopment and ments are used	
	application with	(b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments		
	(c) satisfies all of th	ne followina:		
	45	e than 5 additional allot	ments are	
	(ii) Each pro	oposed allotment has a 300m ² and frontage of		
		oposed allotment has a		
	(iv) There a of the si from the nearest	re no regulated trees on ubject land, with the dis e base of the trunk of th trunk of the tree) to the	tance measured te tree (or the subject land	
	(v) The divi	sion does not involve cr	eation of a	

Page 5 of 140 Printed on 16/12/2021

public road (vi) Vehicle access from a public road can be provided to all proposed allotments which satisfies Design in Urban Areas DTS/DPF 23.3, 23.4 and 23.6, and would be located wholly on one side of the allotment, or located no more than 1m from the side boundary alignment (vii) No allotments are in a battle-axe configuration and (viii) Each proposed allotment is of a size and dimension capable of containing a rectangle 9m in width and 15m in depth. Site Coverage PO 3.1 DTS/DPF 3.1 Building footprints allow sufficient space around buildings to The development does not result in site coverage exceeding limit visual impact, provide an attractive outlook and access to light and ventilation. **Building Height** PO 4.1 DTS/DPF 4.1 Buildings contribute to a low-rise suburban character. Building height (excluding garages, carports and outbuildings) no greater than: (a) 2 building levels and 9m (b) wall height that is no greater than 7m except in the case of a gable end. Primary Street Setback PO 5.1 DTS/DPF 5.1 Buildings are setback from primary street boundaries to The building line of a building set back from the primary street contribute to the existing/emerging pattern of street setbacks in boundary: the streetscape. (a) no more than 1m in front of the average setback to the building line of existing buildings on adjoining sites which face the same primary street (including those buildings that would adjoin the site if not separated by a public road or a vacant allotment) (b) where there is only one existing building on adjoining sites which face the same primary street (including those that would adjoin if not separated by a public road or a vacant allotment), no more than 1m in front of the setback to the building line of that building (c) not less than 5m where no building exists on an adjoining site with the same primary street frontage. Secondary Street Setback PO 6.1 DTS/DPF 6.1 Buildings are set back from secondary street boundaries to Building walls are set back from the boundary of the allotment achieve separation between building walls and public streets and with a secondary street frontage: contribute to a suburban streetscape character. (a) at least 900mm or

Page 6 of 140 Printed on 16/12/2021

(b) if a dwelling on any adjoining allotment is closer to the secondary street than 900mm, at least the distance of that dwelling from the boundary with the secondary street.

Boundary Walls

PO 7.1

Dwelling boundary walls are limited in height and length to manage visual and overshadowing impacts on adjoining properties.

DTS/DPF 7.1

Except where the dwelling is located on a central site within a row dwelling or terrace arrangement, side boundary walls occur only on one side boundary and satisfy (a) or (b) below:

- (a) side boundary walls adjoin or abut a boundary wall of a building on adjoining land for the same or lesser length and height
- (b) side boundary walls do not:
 - (i) exceed 3m in height from the top of footings
 - (ii) exceed 11.5m in length
 - (iii) when combined with other walls on the boundary of the subject development site, exceed a maximum 45% of the length of the boundary
 - (iv) encroach within 3m of any other existing or proposed boundary walls on the subject land.

PO 7.2

Dwellings in a semi-detached, row or terrace arrangement maintain space between buildings consistent with a suburban streetscape character.

DTS/DPF 7.2

Dwelling walls in a semi-detached, row or terrace arrangement are setback at least 900mm from side boundaries shared with allotments outside the development site.

Side boundary setback

PO 8.1

Building walls are set back from side boundaries to provide:

- (a) separation between dwellings in a way that contributes to a suburban character
 - and
- (b) access to natural light and ventilation for neighbours.

DTS/DPF 8.1

Other than walls located on a side boundary, building walls are set back from side boundaries:

- (a) at least 900mm where the wall height is up to 3m
- (b) other than for a wall facing a southern side boundary, at least 900mm plus 1/3 of the wall height above 3m

and

(c) at least 1900mm plus 1/3 of the wall height above 3m for walls facing a southern side boundary.

Rear boundary setback

PO 9.1

Dwelling walls are set back from rear boundaries to provide:

- (a) separation between dwellings in a way that contributes to a suburban character
- (b) access to natural light and ventilation for neighbours
- (c) private open space
- (d) space for landscaping and vegetation.

DTS/DPF 9.1

Dwelling walls are set back from the rear boundary at least:

- (a) if the size of the site is less than 301m²-
 - (i) 3m in relation to the ground floor of the dwelling
 - (ii) 5m in relation to any other building level of the dwelling
- (b) if the size of the site is 301m² or more—
 - (i) 4m in relation to the ground floor of the dwelling

Page 7 of 140 Printed on 16/12/2021

(ii) 6m in relation to any other building level of the dwelling.

Concept Plans

PO 10.1

Development is compatible with the outcomes sought by any relevant Concept Plan contained within Part 12 - Concept Plans of the Planning and Design Code to support the orderly development of land through staging of development and provision of infrastructure.

DTS/DPF 10.1

The site of the development is wholly located outside any relevant Concept Plan boundary. The following Concept Plans are relevant:

In relation to DTS/DPF 10.1, in instances where:

- (a) one or more Concept Plan is returned, refer to Part 12 -Concept Plans in the Planning and Design Code to determine if a Concept Plan is relevant to the site of the proposed development. Note: multiple concept plans may be relevant.
- (b) in instances where 'no value' is returned, there is no relevant concept plan and DTS/DPF 10.1 is met.

Ancillary Buildings and Structures

PO 11.1

Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or neighbouring properties.

DTS/DPF 11.1

Ancillary buildings:

- (a) are ancillary to a dwelling erected on the same site
- (b) have a floor area not exceeding 60m2
- (c) are not constructed, added to or altered so that any part is situated:
 - in front of any part of the building line of the dwelling to which it is ancillary or
 - (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
 - is set back at least 5.5m from the boundary of the primary street
 - (ii) have a door / opening not exceeding:
 - for dwellings of single building level 7m in width or 50% of the site frontage,
 whichever is the lesser
 - B. for dwellings comprising two or more building levels at the building line fronting the same public street 7m in width
- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
 - (i) a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary and
 - (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same

Page 8 of 140 Printed on 16/12/2021

or lesser extent (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure (h) have a wall height (or post height) not exceeding 3m (i) have a roof height where no part of the roof is more than 5m above the natural ground level (j) if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less: (i) a total area as determined by the following table: Dwelling site area (or in the case of Minimum residential flat building or group percentage of dwelling(s), average site area) (m2) site <150 10% 150-200 15% 201-450 20% >450 25% (ii) the amount of existing soft landscaping prior to the development occurring. PO 11.2 DTS/DPF 11.2 Ancillary buildings and structures do not impede on-site Ancillary buildings and structures do not result in: functional requirements such as private open space provision, car parking requirements or result in over-development of the less private open space than specified in Design in (a) site Urban Areas Table 1 - Private Open Space (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. Advertisements PO 12.1 DTS/DPF 12.1 Advertisements identify the associated business activity, and do Advertisements relating to a lawful business activity associated not detract from the residential character of the locality. with a residential use do not exceed 0.3m2 and mounted flush with a wall or fence.

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Page 9 of 140 Printed on 16/12/2021

Interpretation

A class of development listed in Column A is excluded from notification provided that it does not fall within a corresponding exclusion prescribed in Column B. In instances where development falls within multiple classes within Column A, each clause is to be read independently such that if a development is excluded from notification by any clause, it is, for the purposes of notification excluded irrespective of any other clause.

Class	of Development	Exceptions
(Colun	nn A)	(Column B)
1.	A kind of development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development.	None specified.
2.	All development undertaken by: (a) the South Australian Housing Trust either individually or jointly with other persons or bodies or (b) a provider registered under the Community Housing National Law participating in a program relating to the renewal of housing endorsed by the South Australian Housing Trust.	 residential flat building(s) of 3 or more building levels the demolition of a State or Local Heritage Place the demolition of a building (except an ancillary building) in a Historic Area Overlay.
3.	Any development involving any of the following (or of any combination of any of the following): (a) air handling unit, air conditioning system or exhaust fan (b) ancillary accommodation (c) building work on railway land (d) carport (e) deck (f) dwelling (g) dwelling addition (h) fence (i) outbuilding (j) pergola (k) private bushfire shelter (l) residential flat building (m) retaining wall (n) retirement facility (o) shade sail (p) solar photovoltaic panels (roof mounted) (q) student accommodation (r) supported accommodation (s) swimming pool or spa pool (t) verandah (u) water tank.	Except development that: 1. does not satisfy General Neighbourhood Zone DTS/DPF 4.1 or 2. involves a building wall (or structure) that is proposed to be situated on a side boundary (not being a boundary with a primary street or secondary street) and: (a) the length of the proposed wall (or structure) exceeds 11.5m (other than where the proposed wall abuts an existing wall or structure of greater length on the adjoining allotment) or (b) the height of the proposed wall (or post height) exceeds 3m measured from the top of footings (other than where the proposed wall (or post) abuts an existing wall or structure of greater height on the adjoining allotment).
4.	Any development involving any of the following (or of any combination of any of the following):	Except development that:

Page 10 of 140 Printed on 16/12/2021

(a) consulting room (b) office (c) shop.	 does not satisfy any of the following: (a) General Neighbourhood Zone DTS/DPF 1.4 (b) General Neighbourhood Zone DTS/DPF 4.1 or involves a building wall (or structure) that is proposed to be situated on a side boundary (not being a boundary with a primary street or secondary street) and: (a) the length of the proposed wall (or structure) exceeds 11.5m (other than where the proposed wall abuts an existing wall or structure of greater length on the adjoining allotment) or (b) the height of the proposed wall (or post height) exceeds 3m measured from the top of footings (other than where the proposed wall (or post) abuts an existing wall or structure of greater height on the adjoining allotment).
 5. Any development involving any of the following (or of any combination of any of the following): (a) internal building works (b) land division (c) recreation area (d) replacement building (e) temporary accommodation in an area affected by bushfire (f) tree damaging activity. 	None specified.
 6. Alteration of or addition to any development involving the following (or of any combination of any of the following): (a) community facility (b) educational establishment (c) pre-school. 	Except development that does not satisfy General Neighbourhood Zone DTS/DPF 1.5.
7. Demolition.	 Except any of the following: the demolition of a State or Local Heritage Place the demolition of a building (except an ancillary building) in a Historic Area Overlay.
Placement of Notices - Exemptions for Performance Assessed	Development
None specified.	

Placement of Notices - Exemptions for Restricted Development

None specified.

Part 3 - Overlays

Page 11 of 140 Printed on 16/12/2021

Affordable Housing Overlay

Assessment Provisions (AP)

	Desired Outcome	
DO 1	Affordable housing is integrated with residential and mixed use development.	
DO 2	Affordable housing caters for a variety of household structures.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land I	Division
PO 1.1	DTS/DPF 1.1
Development comprising 20 or more dwellings / allotments incorporates affordable housing.	Development results in 0-19 additional allotments / dwellings.
P0 1.2	DTS/DPF 1.2
Development comprising 20 or more dwellings or residential allotments provides housing suited to a range of incomes including households with low to moderate incomes.	Development comprising 20 or more dwellings / or residential allotments includes a minimum of 15% affordable housing except where: (a) it can be demonstrated that any shortfall in affordable housing has been provided in a previous stage of
	development or (b) it can be demonstrated that any shortfall in affordable housing will be accommodated in a subsequent stage or stages of development.
PO 1.3	DTS/DPF 1.3
Affordable housing is distributed throughout the development to avoid an overconcentration.	None are applicable.
Built Form and Character	
PO 2.1	DTS/DPF 2.1
Affordable housing is designed to complement the design and character of residential development within the locality.	None are applicable.
Affordable Ho	using Incentives
PO 3.1	DTS/DPF 3.1

Page 12 of 140 Printed on 16/12/2021

To support the provision of affordable housing, minimum allotment sizes may be reduced below the minimum allotment size specified in a zone while providing allotments of a suitable size and dimension to accommodate dwellings with a high standard of occupant amenity.

The minimum site area specified for a dwelling can be reduced by up to 20%, or the maximum density per hectare increased by up to 20%, where it is to be used to accommodate affordable housing except where the development is located within the Character Area Overlay or Historic Area Overlay.

PO 3.2

To support the provision of affordable housing, building heights may be increased above the maximum specified in a zone.

DTS/DPF 3.2

Where a building incorporates dwellings above ground level and includes at least 15% affordable housing, the maximum building height specified in any relevant zone policy can be increased by 1 building level in the:

- (a) Business Neighbourhood Zone
- (b) City Living Zone
- (c) Established Neighbourhood Zone
- (d) General Neighbourhood Zone
- (e) Hills Neighbourhood Zone
- (f) Housing Diversity Neighbourhood Zone
- (g) Neighbourhood Zone
- (h) Master Planned Neighbourhood Zone
- (i) Master Planned Renewal Zone
- (j) Master Planned Township Zone
- (k) Rural Neighbourhood Zone
- (I) Suburban Business Zone
- (m) Suburban Neighbourhood Zone
- (n) Township Neighbourhood Zone
- (o) Township Zone
- (p) Urban Renewal Neighbourhood Zone
- (q) Waterfront Neighbourhood Zone

and up to 30% in any other zone, except where:

- (a) the development is located within the Character Area Overlay or Historic Area Overlay or
- (b) other height incentives already apply to the development.

Movement and Car Parking

PO 4.1

Sufficient car parking is provided to meet the needs of occupants of affordable housing.

DTS/DPF 4.1

Dwellings constituting affordable housing are provided with car parking in accordance with the following:

- (a) 0.3 carparks per dwelling within a building which incorporates dwellings located above ground level within either:
 - (i) 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service⁽²⁾
 - (ii) is within 400 metres of a bus interchange (1)
 - (iii) is within 400 metres of an O-Bahn interchange⁽¹⁾
 - (iv) is within 400 metres of a passenger rail station⁽¹⁾
 - (v) is within 400 metres of a passenger tram station⁽¹⁾
 - (vi) is within 400 metres of the Adelaide Parklands.

Page 13 of 140 Printed on 16/12/2021

or	
(b) 1 carpark per dwelling for any other dwe	elling.
[NOTE(S): (1) Measured from an area that conta platform(s), shelter(s) or stop(s) where people of the purpose waiting to board a bus, tram or train include areas used for the parking of vehicles. (2) frequency public transit service is a route service minutes between 7.30am and 6.30pm Monday to every 30 minutes at night, Saturday, Sunday and until 10pm.]	congregate for n, but does not 2) A high ed every 15 o Friday and

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Development for the purposes of the provision of affordable housing (applying the criteria determined under regulation 4 of the South Australian Housing Trust Regulations 2010).	Minister responsible for administering the South Australian Housing Trust Act 1995.	To provide direction on the conditions required to secure the provision of dwellings or allotments for affordable housing.	Development of a class to which Schedule 9 clause 3 item 20 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Defence Aviation Area Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Management of potential impacts of buildings on the operational and safety requirements of Defence Aviation Areas.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /	
	Designated Performance	

Page 14 of 140 Printed on 16/12/2021

	Feature
Built Form	
P0 1.1	DTS/DPF 1.1
Building height does not pose a hazard to the operations of Defence Aviation Areas.	Building height does not exceed the relevant height specified by the <i>Defence Aviation Area Overlay</i> .
PO 1.2	DTS/DPF 1.2
Exhaust stacks are designed and sited to minimise plume impacts on aircraft movements associated with Defence Aviation Areas.	Development does not include exhaust stacks.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Hazards (Flooding) Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Impacts on people, property, infrastructure and the environment from high flood risk are minimised by retaining areas free from development, and minimising intensification where development has occurred.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land Division		
P0 1.1	DTS/DPF 1.1	
Land division is limited to areas where the consequences to buildings and safety are low and can be readily managed or overcome.	None are applicable.	
Land Use		

Page 15 of 140 Printed on 16/12/2021

Policy24 - Enquiry		
PO 2.1	DTS/DPF 2.1	
Development sited and designed to minimise exposure of people and property to unacceptable flood risk.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Buildings housing vulnerable people, community services facilities, key infrastructure and emergency services are sited away from flood prone areas to enable uninterrupted operation of services and reduce likelihood of entrapment.	Pre-schools, educational establishments, retirement and supported accommodation, emergency services facilities, hospitals and prisons are not located within the Overlay area.	
Flood R	I esilience	
P0 3.1	DTS/DPF 3.1	
Development avoids the need for flood protection works.	None are applicable.	
PO 3.2	DTS/DPF 3.2	
Development does not cause unacceptable impacts on any adjoining property by the diversion of flood waters or an increase in flood velocity or flood level.	None are applicable.	
P0 3.3	DTS/DPF 3.3	
Development does not impede the flow of floodwaters through the allotment or the surrounding land, or cause an unacceptable loss of flood storage.	None are applicable.	
P0 3.4	DTS/DPF 3.4	
Development avoids frequently flooded or high velocity areas, other than where it is part of a flood mitigation scheme to reduce flood impact.	Other than a recreation area, development is located outside of the 5% AEP principal flow path.	
P0 3.5	DTS/DPF 3.5	
Buildings are sited, designed and constructed to prevent the entry of floodwaters in a 1% AEP flood event where the entry of floodwaters is likely to result in undue damage to, or compromise ongoing activities within, buildings.	Buildings comprise one of the following: (a) a porch or portico with at least 2 open sides (b) a verandah with at least 3 open sides (c) a carport or outbuilding with at least 2 open sides (whichever elevations face the direction of the flow) (d) any post construction with open sides (e) a building with a finished floor level that is at least 300mm above the height of a 1% AEP flood event.	
P0 3.6	DTS/DPF 3.6	
Fences do not unreasonably impede floodwaters.	A post and wire fence (other than a chain mesh fence).	
Environment	al Protection	
P0 4.1	DTS/DPF 4.1	
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building during a 1% AEP flood event to avoid potential environmental harm.	Development involving the storage or disposal of hazardous materials is wholly located outside of the 1% AEP flood plain or flow path.	
P0 4.2	DTS/DPF 4.2	

Page 16 of 140 Printed on 16/12/2021

Policy24 - Enquiry	
Development does not create or aggravate the potential for erosion or siltation or lead to the destruction of vegetation during a flood.	None are applicable.
Site Ear	thworks
PO 5.1	DTS/DPF 5.1
The depth and extent of filling required to raise the finished floor level of a building does not cause unacceptable impact on any adjoining property by diversion of flood waters, an increase in flood velocity or flood level, or an unacceptable loss of flood storage.	None are applicable.
PO 5.2	DTS/DPF 5.2
Driveways, access tracks and parking areas are designed and constructed to minimise excavation and filling.	Filling for ancillary purposes: (a) does not exceed 300mm above existing ground level (b) is no more than 5m wide.
Acc	ess
PO 6.1	DTS/DPF 6.1
Development does not occur on land:	None are applicable.
 (a) from which evacuation to areas not vulnerable to flood risk is not possible during a 1% AEP flood event (b) which cannot be accessed by emergency services vehicles or essential utility service vehicles during a 1% AEP flood event. 	
PO 6.2	DTS/DPF 6.2
Access driveways and tracks to significant development (i.e. dwellings, places of work, etc.) consist of a safe, all-weather trafficable surface that is accessible during a 1% AEP flood event.	None are applicable.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Hazards (Flooding - General) Overlay

Assessment Provisions (AP)

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance

Page 17 of 140 Printed on 16/12/2021

		Feature
	Flood R	esilience
DTS/DPF 2.1		

Habitable buildings, commercial and industrial buildings, and buildings used for animal keeping incorporate a finished ground and floor level not less than:

In instances where no finished floor level value is specified, a building incorporates a finished floor level at least 300mm above the height of a 1% AEP flood event.

Hazards (Flooding - Evidence Required) Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Development adopts a precautionary approach to mitigate potential impacts on people, property, infrastructure and	
	the environment from potential flood risk through the appropriate siting and design of development.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Flood R	esilience	
PO 1.1	DTS/DPF 1.1	
Development is sited, designed and constructed to minimise the risk of entry of potential floodwaters where the entry of flood waters is likely to result in undue damage to or compromise ongoing activities within buildings.	Habitable buildings, commercial and industrial buildings, and buildings used for animal keeping incorporate a finished floor level at least 300mm above: (a) the highest point of top of kerb of the primary street or (b) the highest point of natural ground level at the primary street boundary where there is no kerb	
Environmental Protection		
PO 2.1	DTS/DPF 2.1	
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building.		

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Page 18 of 140 Printed on 16/12/2021

Prescribed Wells Area Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Sustainable water use in prescribed wells areas.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1 All development, but in particular involving any of the following:	DTS/DPF 1.1 Development satisfies either of the following:
(a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry has a lawful, sustainable and reliable water supply that does not place undue strain on water resources in prescribed wells areas.	 (a) the applicant has a current water licence in which sufficient spare capacity exists to accommodate the water needs of the proposed use or (b) the proposal does not involve the taking of water for which a licence would be required under the Landscape South Australia Act 2019.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development that require or may require water to be taken in addition to any allocation that has already been granted under the Landscape South Australia Act 2019: (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commerical forestry.	The Chief Executive of the Department of the Minister responsible for the administration of the Landscape South Australia Act 2019.	To provide expert technical assessment and direction to the relevant authority on the taking of water to ensure development is undertaken sustainably.	Development of a class to which Schedule 9 clause 3 item 13 of the Planning, Development and Infrastructure (General) Regulations 2017 applies

Page 19 of 140 Printed on 16/12/2021

licence under Part 8 Division 6 of the Landscape	
South Australia Act 2019.	

Regulated and Significant Tree Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Conservation of regulated and significant trees to provide aesthetic and environmental benefits and mitigate tree loss.	

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Tree Retention	on and Health
P0 1.1	DTS/DPF 1.1
Regulated trees are retained where they:	None are applicable.
 (a) make an important visual contribution to local character and amenity (b) are indigenous to the local area and listed under the National Parks and Wildlife Act 1972 as a rare or endangered native species and / or (c) provide an important habitat for native fauna. 	
PO 1.2	DTS/DPF 1.2
Significant trees are retained where they:	None are applicable.
(a) make an important contribution to the character or amenity of the local area	
(b) are indigenous to the local area and are listed under the National Parks and Wildlife Act 1972 as a rare or endangered native species	
(c) represent an important habitat for native fauna	
(d) are part of a wildlife corridor of a remnant area of native vegetation	
(e) are important to the maintenance of biodiversity in the local environment	
and / or (f) form a notable visual element to the landscape of the local area.	
PO 1.3	DTS/DPF 1.3
A tree damaging activity not in connection with other development satisfies (a) and (b):	None are applicable.

Page 20 of 140 Printed on 16/12/2021

- (a) tree damaging activity is only undertaken to:
 - (i) remove a diseased tree where its life expectancy is short
 - (ii) mitigate an unacceptable risk to public or private safety due to limb drop or the like
 - (iii) rectify or prevent extensive damage to a building of value as comprising any of the following:
 - A. a Local Heritage Place
 - B. a State Heritage Place
 - C. a substantial building of value

and there is no reasonable alternative to rectify or prevent such damage other than to undertake a tree damaging activity

- (iv) reduce an unacceptable hazard associated with a tree within 20m of an existing residential, tourist accommodation or other habitable building from bushfire
- (v) treat disease or otherwise in the general interests of the health of the tree and / or
- (vi) maintain the aesthetic appearance and structural integrity of the tree
- (b) in relation to a significant tree, tree-damaging activity is avoided unless all reasonable remedial treatments and measures have been determined to be ineffective.

PO 1.4

A tree-damaging activity in connection with other development satisfies all the following:

- (a) it accommodates the reasonable development of land in accordance with the relevant zone or subzone where such development might not otherwise be possible
- (b) in the case of a significant tree, all reasonable development options and design solutions have been considered to prevent substantial tree-damaging activity occurring.

DTS/DPF 1.4

None are applicable.

Ground work affecting trees

PO 2.1

Regulated and significant trees, including their root systems, are not unduly compromised by excavation and / or filling of land, or the sealing of surfaces within the vicinity of the tree to support their retention and health.

DTS/DPF 2.1

None are applicable.

Land Division

PO 3.1

Land division results in an allotment configuration that enables its subsequent development and the retention of regulated and significant trees as far as is reasonably practicable.

DTS/DPF 3.1

Land division where:

- (a) there are no regulated or significant trees located within or adjacent to the plan of division
- (b) the application demonstrates that an area exists to accommodate subsequent development of proposed allotments after an allowance has been made for a tree

Page 21 of 140 Printed on 16/12/2021

protection zone around any regulated tree within and
adjacent to the plan of division.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

	Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
No	one	None	None	None

Stormwater Management Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development incorporates water sensitive urban design techniques to capture and re-use stormwater.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Residential development is designed to capture and re-use stormwater to:	Residential development comprising detached, semi-detached or row dwellings, or less than 5 group dwellings or dwellings within a residential flat building:
(a) maximise conservation of water resources	
 (b) manage peak stormwater runoff flows and volume to ensure the carrying capacities of downstream systems are not overloaded (c) manage stormwater runoff quality. 	(i) connected to at least: A. in relation to a detached dwelling (not in a battle-axe arrangement), semidetached dwelling or row dwelling, 60% of the roof area B. in all other cases, 80% of the roof area (ii) connected to either a toilet, laundry cold water outlets or hot water service for sites less than 200m² (iii) connected to one toilet and either the laundry cold water outlets or hot water service for sites of 200m² or greater (iv) with a minimum total capacity in accordance with Table 1 (v) where detention is required, includes a 20-25 mm diameter slow release orifice at the bottom
Page 22 of 140	of the detention component of the tank (b) incorporates dwelling roof area comprising at least 80% of the site's impervious area Table 1: Rainwater Tank Printed on 16/12/2021

²)	m ²)	Minimum retention volume (Litres)	Minimum detention volume (Litres)
00	:200	1000	1000
0-400	200-400	2000	Site perviousness <30%: 1000 Site perviousness ≥30%: N/A
01	-401	4000	Site perviousness <35%: 1000 Site perviousness ≥35%: N/A

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Traffic Generating Development Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes and Major Urban Transport Routes for all road users.	
DO 2	Provision of safe and efficient access to and from urban transport routes and major urban transport routes.	

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance

Page 23 of 140 Printed on 16/12/2021

	Feature
Traffic Generat	ing Development
PO 1.1	DTS/DPF 1.1
Development designed to minimise its potential impact on the safety, efficiency and functional performance of the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.
PO 1.2 Access points sited and designed to accommodate the type and volume of traffic likely to be generated by development.	DTS/DPF 1.2 Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.
Sufficient accessible on-site queuing provided to meet the needs of the development so that queues do not impact on the State Maintained Road network.	DTS/DPF 1.3 Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity Referral Body Purpose of Referral Statuto Referen

Page 24 of 140 Printed on 16/12/2021

Except where all of the relevant deemed-to-satisfy criteria are met, any of the following classes of development that are proposed within 250m of a State Maintained Road: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m² or more (c) retail development with a gross floor area of 2,000m² or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m² or more (e) industry with a gross floor area of 20,000m² or more (f) educational facilities with a capacity of 250 students or more.	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Urban Transport Routes Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes for all road users.	
DO 2	Provision of safe and efficient access to and from Urban Transport Routes.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance	Deemed-to-Satisfy Criteria / Designated		
Outcome	Performance Feature		
	Access - Safe Entry and Exit (Traffic Flow)		
PO 1.1	DTS/DPF 1.1		
Access is designed to allow safe entry and exit to and from a site to meet the needs of development and minimise traffic flow interference associated with access movements along adjacent State maintained roads.	An access point satisfies (a), (b) or (c): (a) where servicing a single (1) dwelling / residential allotment: (i) it will not result in more than one access point (ii) vehicles can enter and exit the site in a forward direction (iii) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees (iv) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road (v) it will have a width of between 3m and 4m (measured at the site boundary) (b) where the development will result in 2 and up to 6 dwellings:		

Page 25 of 140 Printed on 16/12/2021

- (i) it will not result in more than one access point servicing the development site
- (ii) vehicles can enter and exit the site in a forward direction
- (iii) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
- (iv) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road
- (v) it will have a width of between 5.8m to 6m (measured at the site boundary) and an access depth of 6m (measured from the site boundary into the site)
- (c) where the development will result in 7 or more dwellings, or is a non-residential land use:
 - (i) it will not result in more than one access point servicing the development site
 - (ii) vehicles can enter and exit the site using left turn only movements
 - (iii) vehicles can enter and exit the site in a forward direction
 - (iv) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
 - (v) it will have a width of between 6m and 7m (measured at the site boundary), where the development is expected to accommodate vehicles with a length of 6.4m or less
 - (vi) it will have a width of between 6m and 9m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 6.4m to 8.8m
 - (vii) it will have a width of between 9m and 12m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 8.8m to 12.5m
 - (viii) provides for simultaneous two-way vehicle movements at the access:
 - A. with entry and exit movements for vehicles with a length up to 5.2m vehicles being fully within the kerbside lane of the road

and

B. with entry movements of 8.8m vehicles (where relevant) being fully within the kerbside lane of the road and the exit movements of 8.8m vehicles do not cross the centreline of the road.

Access - On-Site Queuing

PO 2.1

Sufficient accessible on-site queuing adjacent to access points is provided to meet the needs of development so that all vehicle queues can be contained fully within the boundaries of the development site, to minimise interruption on the functional


DTS/DPF 2.1

An access point in accordance with one of the following:

(a) will not service, or is not intended to service, more than 6 dwellings and there are no internal driveways, intersections, car parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site) as shown in the following diagram:

Page 26 of 140 Printed on 16/12/2021

performance of the road and maintain safe vehicle movements.



- (b) will service, or is intended to service, development that will generate less than 60 vehicle movements per day, and:
 - (i) is expected to be serviced by vehicles with a length no greater than 6.4m
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)
- (c) will service, or is intended to service, development that will generate less than 60 vehicle movements per day, and:
 - is expected to be serviced by vehicles with a length greater than a 6.4m small rigid vehicle
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)
 - (iii) any termination of or change in priority of movement within the main car park aisle is located far enough into the site so that the largest vehicle expected on-site can store fully within the site before being required to stop
 - all parking or manoeuvring areas for commercial vehicles are located a minimum of 12m or the length of the longest vehicle expected on site from the access (measured from the site boundary into the site) as shown in the following diagram:



Access - (Location Spacing) - Existing Access Point

PO 3.1

Existing access points are designed to accommodate the type and volume of traffic likely to be generated by the development.

DTS/DPF 3.1

An existing access point satisfies (a), (b) or (c):

- (a) it will not service, or is not intended to service, more than 6 dwellings
- (b) it is not located on a Controlled Access Road and will not service development that will result in (b) a larger class of vehicle expected to access the site using the existing access
- (c) is not located on a Controlled Access Road and development constitutes:
 - (i) a change of use between an office <500m² gross leasable floor area

Page 27 of 140 Printed on 16/12/2021

- and a consulting room <500m² gross leasable floor area or vice
- (ii) a change in use from a shop to an office, consulting room or personal or domestic services establishment
- (iii) a change of use from a consulting room or office <250m² gross leasable floor area to shop <250m² gross leasable floor area
- (iv) a change of use from a shop <500m² gross leasable floor area to a warehouse <500m² gross leasable floor area
- (v) an office or consulting room with a <500m² gross leasable floor area.

Access - Location (Spacing) - New Access Points


PO 4.1

New access points are spaced apart from any existing access point or public road junction to manage impediments to traffic flow and maintain safe and efficient operating conditions on the road.

DTS/DPF 4.1

A new access point satisfies (a), (b) or (c):

(a) where a development site is intended to serve between 1 and 6 dwellings and has frontage to a local road (not being a Controlled Access Road) with a speed environment of 60km/h or less, the new access point is provided on the local road and located a minimum of 6.0m from the tangent point as shown in the following diagram:



NOTE

The points marked X_1 and X are respectively at the median end on a divided road and at the intersection of the main road centre-line and the extensions of the side road property lines shown as dotted lines, on an undivided road. On a divided road, dimension Y-Y extends to Point Y_1 .

- (b) where the development site is intended to serve between 1 and 6 dwellings and access from a local road (being a road that is not a State Maintained Road) is not available, the new access:
 - (i) is not located on a Controlled Access Road
 - (ii) is not located on a section of road affected by double barrier lines
 - (iii) will be on a road with a speed environment of 70km/h or less
 - (iv) is located outside of the bold lines on the diagram shown in the diagram following part (a)
 - (v) located minimum of 6m from a median opening or pedestrian crossing
- (c) where DTS/DPF 4.1 part (a) and (b) do not apply and access from an alternative local road at least 25m from the State Maintained Road is not available, and the access is not located on a Controlled Access Road, the new access is separated in accordance with the following:

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes
50 km/h	No spacing	20m
or less	requirement	
60 km/h	30m	73m

Page 28 of 140 Printed on 16/12/2021

70 km/h	40m	92m
80 km/h	50m	114m
90 km/h	65m	139m
100	80m	165m
km/h		
110	100m	193m
km/h		

Access - Location (Sight Lines)

PO 5.1


Access points are located and designed to accommodate sight lines that enable drivers and pedestrians to navigate potential conflict points with roads in a controlled and safe manner.

DTS/DPF 5.1


An access point satisfies (a) or (b):

(a) drivers approaching or exiting an access point have an unobstructed line of sight in accordance with the following (measured at a height of 1.1m above the surface of the road):

Speed Limit	Access point serving 1-6 dwellings	Access point serving all other development
40 km/h or	40m	73m
less		
50 km/h	55m	97m
60 km/h	73m	123m
70 km/h	92m	151m
80 km/h	114m	181m
90 km/h	139m	214m
100 km/h	165m	248m
110km/h	193m	285m



(b) pedestrian sightlines in accordance with the following diagram:

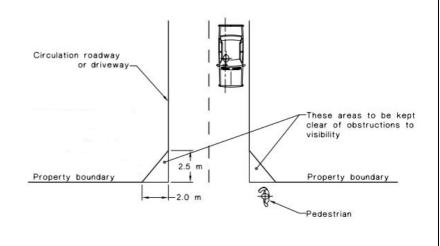

Access - Mud and Debris

PO 6.1 DTS/DPF 6.1

Page 29 of 140 Printed on 16/12/2021

Policy24 - Enquiry		
Access points constructed to minimise mud or other debris being carried or transferred onto the road to ensure safe road operating conditions.	is sealed from the edge of seal on the road for a minimum of 10m or to the property	
	Access - Stormwater	
P0 7.1	DTS/DPF 7.1	
Access points are designed to minimise negative impact on roadside drainage of water.	Development does not: (a) decrease the capacity of an existing drainage point (b) restrict or prevent the flow of stormwater through an existing drainage point and system.	
	Building on Road Reserve	
PO 8.1	DTS/DPF 8.1	
Buildings or structures that encroach onto, above or below road reserves are designed and sited to minimise impact on safe movements by all road users.	Buildings or structures are not located on, above or below the road reserve.	
	Public Road Junctions	
PO 9.1	DTS/DPF 9.1	
New junctions with a public road (including the opening of unmade public road junctions) or modifications to existing road junctions are located and designed to ensure safe operating conditions are maintained on the State Maintained Road.	(a) creating a new junction with a public road (b) opening an unmade public road junction (c) modifying an existing public road junction.	
	Corner Cut-Offs	
PO 10.1	DTS/DPF 10.1	
Development is located and designed to maintain sightlines for drivers turning into and out of public road junctions to contribute to driver safety.	Development does not involve building work, or building work is located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram: Corner Cut-Off Area Allotment Boundary Off Area Road Reserve	

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Page 30 of 140 Printed on 16/12/2021

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Urban Tree Canopy Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Residential development preserves and enhances urban tree canopy through the planting of new trees and retention of
	existing mature trees where practicable.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
PO 1.1	DTS/DPF 1.1	
Trees are planted or retained to contribute to an urban tree canopy.	Tree planting is provided in	n accordance with the following:
currept.	Site size per dwelling (m ²)	Tree size* and number required per dwelling
	<450	1 small tree
	450-800	1 medium tree or 2 small trees
	>800	1 large tree or 2 medium trees or 4 small trees
	*refer Table 1 Tree Size	
	Table 1 Tree Size	

Page 31 of 140 Printed on 16/12/2021

Tree size	Mature height (minimum)	Mature spread (minimum)	Soil area around tree within development site (minimum)
Small	4 m	2m	10m ² and min. dimension of 1.5m
Medium	6 m	4 m	30m ² and min. dimension of 2m
Large	12 m	8m	60m ² and min. dimension of 4m

The discount in Column D of Table 2 discounts the number of trees required to be planted in DTS/DPF 1.1 where existing tree(s) are retained on the subject land that meet the criteria in Columns A, B and C of Table 2, and are not a species identified in Regulation 3F(4)(b) of the Planning Development and Infrastructure (General) Regulations 2017.

Table 2 Tree Discounts			
Retained tree height (Column A)	Retained tree spread (Column B)	Retained soil area around tree within development site (Column C)	Discount applied (Column D)
4-6m	2-4m	10m ² and min. dimension of 1.5m	2 small trees (or 1 medium tree)
6-12m	4-8m	30m ² and min. dimension of 3m	2 medium trees (or 4 small trees)
>12m	>8m	60m ² and min. dimension of 6m	2 large trees (or 4 medium trees, or 8 small trees)

Note: In order to satisfy DTS/DPF 1.1, payment may be made in accordance with a relevant off-set scheme established by the Minister under section 197 of the Planning, Development and Infrastructure Act 2016, provided the provisions and requirements of that scheme are satisfied. For the purposes of section 102(4) of the Planning, Development and Infrastructure Act 2016, an applicant may elect for any of the matters in DTS/DPF 1.1 to be reserved.

Page 32 of 140 Printed on 16/12/2021

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Water Resources Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Protection of the quality of surface waters considering adverse water quality impacts associated with projected reductions in rainfall and warmer air temperatures as a result of climate change.	
DO 2	Maintain the conveyance function and natural flow paths of watercourses to assist in the management of flood waters and stormwater runoff.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Water Ca	atchment
P0 1.1	DTS/DPF 1.1
Watercourses and their beds, banks, wetlands and floodplains (1% AEP flood extent) are not damaged or modified and are retained in their natural state, except where modification is required for essential access or maintenance purposes.	None are applicable.
P0 1.2	DTS/DPF 1.2
Development avoids interfering with the existing hydrology or water regime of swamps and wetlands other than to improve the existing conditions to enhance environmental values.	None are applicable.
PO 1.3	DTS/DPF 1.3
Wetlands and low-lying areas providing habitat for native flora and fauna are not drained, except temporarily for essential management purposes to enhance environmental values.	None are applicable.

Page 33 of 140 Printed on 16/12/2021

DTS/DPF 1.4 None are applicable. DTS/DPF 1.5
F
DTS/DPF 1.5
A strip of land 20m or more wide measured from the top of existing banks on each side of the watercourse is free from development, livestock use and revegetated with locally indigenous vegetation.
DTS/DPF 1.6
None are applicable.
DTS/DPF 1.7
None are applicable.
DTS/DPF 1.8
None are applicable.
DTS/DPF 1.9
None are applicable.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Part 4 - General Development Policies

Page 34 of 140 Printed on 16/12/2021

Advertisements

Assessment Provisions (AP)

	Desired Outcome
DO 1	Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Арр	pearance
P0 1.1	DTS/DPF 1.1
Advertisements are compatible and integrated with the design of the building and/or land they are located on.	(a) are not located in a Neighbourhood-type zone (b) where they are flush with a wall: (i) if located at canopy level, are in the form of a fascia sign (ii) if located above canopy level: A. do not have any part rising above
	parapet height B. are not attached to the roof of the building
	(c) where they are not flush with a wall:
	 if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure if attached to a two-storey building: A. has no part located above the finished floor level of the second storey of the
	building B. does not protrude beyond the outer limits of any verandah structure below C. does not have a sign face that exceeds 1m2 per side.
	(d) if located below canopy level, are flush with a wall (e) if located at canopy level, are in the form of a fascia sign (f) if located above a canopy:

Page 35 of 140 Printed on 16/12/2021

(i)

(ii)

are flush with a wall

do not have any part rising above parapet height

- Charles - Char	
	(iii) are not attached to the roof of the building.
	(g) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure
	(h) if attached to a two-storey building, have no part located above the finished floor level of the second storey of the building
	(i) where they are flush with a wall, do not, in combination with any other existing sign, cover more than 15% of the building facade to which they are attached.
PO 1.2	DTS/DPF 1.2
Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.	Where development comprises an advertising hoarding, the supporting structure is:
	(a) concealed by the associated advertisement and decorative detailing or (b) not visible from an adjacent public street or thoroughfare, other than a support structure in the form
	of a single or dual post design.
PO 1.3	DTS/DPF 1.3
Advertising does not encroach on public land or the land of an adjacent allotment.	Advertisements and/or advertising hoardings are contained within the boundaries of the site.
PO 1.4	DTS/DPF 1.4
Where possible, advertisements on public land are integrated with existing structures and infrastructure.	Advertisements on public land that meet at least one of the following:
	(a) achieves Advertisements DTS/DPF 1.1 (b) are integrated with a bus shelter.
PO 1.5	DTS/DPF 1.5
Advertisements and/or advertising hoardings are of a scale and size appropriate to the character of the locality.	None are applicable.
Proliferation o	f Advertisements
P0 2.1	DTS/DPF 2.1
Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	No more than one freestanding advertisement is displayed per occupancy.
PO 2.2	DTS/DPF 2.2
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.
P0 2.3	DTS/DPF 2.3
Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	Advertisements satisfy all of the following:
	(a) are attached to a building
	(b) other than in a Neighbourhood-type zone, where they
	are flush with a wall, cover no more than 15% of the building facade to which they are attached

Page 36 of 140 Printed on 16/12/2021

	is not flush with a wall.
Advert	ising Content
PO 3.1 Advertisements are limited to information relating to the lawful use of land they are located on to assist in the ready identification of the activity or activities on the land and avoid unrelated content that contributes to visual clutter and untidiness.	DTS/DPF 3.1 Advertisements contain information limited to a lawful existing or proposed activity or activities on the same site as the advertisement.
Amer	nity Impacts
PO 4.1 Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	DTS/DPF 4.1 Advertisements do not incorporate any illumination.
	Safety
PO 5.1 Advertisements and/or advertising hoardings erected on a verandah or projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	DTS/DPF 5.1 Advertisements have a minimum clearance of 2.5m between the top of the footpath and base of the underside of the sign.
PO 5.2 Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	DTS/DPF 5.2 No advertisement illumination is proposed.
P0 5.3 Advertisements and/or advertising hoardings do not create a hazard to drivers by: (a) being liable to interpretation by drivers as an official traffic sign or signal (b) obscuring or impairing drivers' view of official traffic signs or signals (c) obscuring or impairing drivers' view of features of a roat that are potentially hazardous (such as junctions, bender changes in width and traffic control devices) or other road or rail vehicles at/or approaching level crossings.	
P0 5.4 Advertisements and/or advertising hoardings do not create a hazard by distracting drivers from the primary driving task at a location where the demands on driver concentration are high.	DTS/DPF 5.4 Advertisements and/or advertising hoardings are not located along or adjacent to a road having a speed limit of 80km/h or more.
P0 5.5 Advertisements and/or advertising hoardings provide sufficient clearance from the road carriageway to allow for safe and convenient movement by all road users.	DTS/DPF 5.5 Where the advertisement or advertising hoarding is: (a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb (b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from the edge of the seal (c) on any other kerbed or unkerbed road, the

Page 37 of 140 Printed on 16/12/2021

	advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal:
	 (a) 110 km/h road - 14m (b) 100 km/h road - 13m (c) 90 km/h road - 10m (d) 70 or 80 km/h road - 8.5m.
PO 5.6 Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 5.6 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).

Animal Keeping and Horse Keeping

Assessment Provisions (AP)

Desired Outcome		
DO 1	Animals are kept at a density that is not beyond the carrying capacity of the land and in a manner that minimises their adverse effects on the environment, local amenity and surrounding development.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature		
Siting and Design			
PO 1.1	DTS/DPF 1.1		
Animal keeping, horse keeping and associated activities do not create adverse impacts on the environment or the amenity of the locality.	None are applicable.		
PO 1.2	DTS/DPF 1.2		
Animal keeping and horse keeping is located and managed to minimise the potential transmission of disease to other operations where animals are kept.	None are applicable.		
Horse Keeping			
PO 2.1	DTS/DPF 2.1		
Water from stable wash-down areas is directed to appropriate absorption areas and/or drainage pits to minimise pollution of	None are applicable.		

Page 38 of 140 Printed on 16/12/2021

Policy24 - Enquiry			
land and water.			
PO 2.2 Stables, horse shelters or associated yards are sited appropriate distances away from sensitive receivers and/or allotments in other ownership to avoid adverse impacts from dust, erosion and odour.	DTS/DPF 2.2 Stables, horse shelters and associated yards are sited in accordance with all of the following: (a) 30m or more from any sensitive receivers (existing or approved) on land in other ownership (b) where an adjacent allotment is vacant and in other ownership, 30m or more from the boundary of that allotment.		
P0 2.3	DTS/DPF 2.3		
All areas accessible to horses are separated from septic tank effluent disposal areas to protect the integrity of that system. Stable flooring is constructed with an impervious material to facilitate regular cleaning.	Septic tank effluent disposal areas are enclosed with a horse- proof barrier such as a fence to exclude horses from this area.		
PO 2.4	DTS/DPF 2.4		
To minimise environmental harm and adverse impacts on water resources, stables, horse shelters and associated yards are appropriately set back from a watercourse.	Stables, horse shelters and associated yards are set back 50m or more from a watercourse.		
PO 2.5	DTS/DPF 2.5		
Stables, horse shelters and associated yards are located on slopes that are stable to minimise the risk of soil erosion and water runoff.	Stables, horse shelters and associated yards are not located on land with a slope greater than 10% (1-in-10).		
Ker	nels		
PO 3.1 Kennel flooring is constructed with an impervious material to facilitate regular cleaning.	DTS/DPF 3.1 The floors of kennels satisfy all of the following: (a) are constructed of impervious concrete (b) are designed to be self-draining when washed down.		
P0 3.2	DTS/DPF 3.2		
Kennels and exercise yards are designed and sited to minimise noise nuisance to neighbours through measures such as:	Kennels are sited 500m or more from the nearest sensitive receiver on land in other ownership.		
 (a) adopting appropriate separation distances (b) orientating openings away from sensitive receivers. 			
PO 3.3	DTS/DPF 3.3		
Dogs are regularly observed and managed to minimise nuisance impact on adjoining sensitive receivers from animal behaviour.	Kennels are sited in association with a permanent dwelling on the land.		
Wastes			
PO 4.1	DTS/DPF 4.1		
Storage of manure, used litter and other wastes (other than wastewater lagoons) is designed, constructed and managed to minimise attracting and harbouring vermin.	None are applicable.		
P0 4.2	DTS/DPF 4.2		

Page 39 of 140 Printed on 16/12/2021

Facilities for the storage of manure, used litter and other wastes (other than wastewater lagoons) are located to minimise the potential for polluting water resources.

Waste storage facilities (other than wastewater lagoons) are located outside the 1% AEP flood event areas.

Aquaculture

Assessment Provisions (AP)

Desired Outcome		
	Aquaculture facilities are developed in an ecologically, economically and socially sustainable manner to support an equitable sharing of marine, coastal and inland resources and mitigate conflict with other water-based and land-based uses.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land-based	d Aquaculture
PO 1.1	DTS/DPF 1.1
Land-based aquaculture and associated components are sited and designed to mitigate adverse impacts on nearby sensitive receivers.	Land-based aquaculture and associated components are located to satisfy all of the following: (a) 200m or more from a sensitive receiver in other ownership (b) 500m or more from the boundary of a zone primarily intended to accommodate sensitive receivers.
P0 1.2	DTS/DPF 1.2
Land-based aquaculture and associated components are sited and designed to prevent surface flows from entering ponds in a 1% AEP sea flood level event.	None are applicable.
PO 1.3	DTS/DPF 1.3
Land-based aquaculture and associated components are sited and designed to prevent pond leakage that would pollute groundwater.	None are applicable.
PO 1.4	DTS/DPF 1.4
Land-based aquaculture and associated components are sited and designed to prevent farmed species escaping and entering into any waters.	None are applicable.
PO 1.5	DTS/DPF 1.5
Land-based aquaculture and associated components, including	None are applicable.

Page 40 of 140 Printed on 16/12/2021

Policy24 - Eriquity	
intake and discharge pipes, are designed to minimise the need to traverse sensitive areas to minimise impact on the natural environment.	
PO 1.6	DTS/DPF 1.6
Pipe inlets and outlets associated with land-based aquaculture are sited and designed to minimise the risk of disease transmission.	None are applicable.
PO 1.7	DTS/DPF 1.7
Storage areas associated with aquaculture activity are integrated with the use of the land and sited and designed to minimise their visual impact on the surrounding environment.	None are applicable.
Marine Base	d Aquaculture
PO 2.1	DTS/DPF 2.1
Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including:	None are applicable.
(a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems.	
PO 2.2	DTS/DPF 2.2
Marine aquaculture is sited in areas with adequate water current to disperse sediments and dissolve particulate wastes to prevent the build-up of waste that may cause environmental harm.	None are applicable.
PO 2.3	DTS/DPF 2.3
Marine aquaculture is designed to not involve discharge of human waste on the site, on any adjacent land or into nearby waters.	None are applicable.
P0 2.4	DTS/DPF 2.4
Marine aquaculture (other than inter-tidal aquaculture) is located an appropriate distance seaward of the high water mark.	Marine aquaculture development is located 100m or more seaward of the high water mark.
PO 2.5	DTS/DPF 2.5
Marine aquaculture is sited and designed to not obstruct or interfere with:	None are applicable.
(a) areas of high public use (b) areas, including beaches, used for recreational activities such as swimming, fishing, skiing, sailing and other water sports	
(c) areas of outstanding visual or environmental value	
(d) areas of high tourism value	
 (e) areas of important regional or state economic activity, including commercial ports, wharfs and jetties 	
(f) the operation of infrastructure facilities including inlet and outlet pipes associated with the desalination of sea water.	

Page 41 of 140 Printed on 16/12/2021

		<u> </u>
PO 2.6		DTS/DPF 2.6
Marine aquaculture is sited and designed to minimise interference and obstruction to the natural processes of the coastal and marine environment.		None are applicable.
PO 2.7		DTS/DPF 2.7
Marine aquaculture is designed to be as unobtrusive as practicable by incorporating measures such as:		None are applicable.
(a)	using feed hoppers painted in subdued colours and suspending them as close as possible to the surface of the water	
(b)	positioning structures to protrude the minimum distance practicable above the surface of the water	
(c)	avoiding the use of shelters and structures above cages and platforms unless necessary to exclude predators and protected species from interacting with the farming structures and/or stock inside the cages, or for safety reasons	
(d)	positioning racks, floats and other farm structures in unobtrusive locations landward from the shoreline.	
PO 2.8		DTS/DPF 2.8
Access, launching and maintenance facilities utilise existing established roads, tracks, ramps and paths to or from the sea where possible to minimise environmental and amenity impacts.		None are applicable.
PO 2.9		DTS/DPF 2.9
Access, launching and maintenance facilities are developed as common user facilities and are co-located where practicable to mitigate adverse impacts on coastal areas.		None are applicable.
PO 2.10		DTS/DPF 2.10
Marine aquaculture is sited to minimise potential impacts on, and to protect the integrity of, reserves under the <i>National Parks and Wildlife Act 1972</i> .		Marine aquaculture is located 1000m or more seaward of the boundary of any reserve under the <i>National Parks and Wildlife Act</i> 1972.
PO 2.11		DTS/DPF 2.11
Onshore storage, cooling and processing facilities do not impair the coastline and its visual amenity by:		None are applicable.
(a)	being sited, designed, landscaped and of a scale to reduce the overall bulk and appearance of buildings and complement the coastal landscape	
(b)	making provision for appropriately sited and designed vehicular access arrangements, including using existing vehicular access arrangements as far as practicable	
(c)	incorporating appropriate waste treatment and disposal.	
Navigation		and Safety
PO 3.1		DTS/DPF 3.1
	aquaculture sites are suitably marked to maintain tional safety.	None are applicable.

Page 42 of 140 Printed on 16/12/2021

PO 3.2	DTS/DPF 3.2
Marine aquaculture is sited to provide adequate separation between farms for safe navigation.	None are applicable.
Environmenta	l Management
PO 4.1	DTS/DPF 4.1
Marine aquaculture is maintained to prevent hazards to people and wildlife, including breeding grounds and habitats of native marine mammals and terrestrial fauna, especially migratory species.	None are applicable.
PO 4.2	DTS/DPF 4.2
Marine aquaculture is designed to facilitate the relocation or removal of structures in the case of emergency such as oil spills, algal blooms and altered water flows.	None are applicable.
PO 4.3	DTS/DPF 4.3
Marine aquaculture provides for progressive or future reclamation of disturbed areas ahead of, or upon, decommissioning.	None are applicable.
PO 4.4	DTS/DPF 4.4
Aquaculture operations incorporate measures for the removal and disposal of litter, disused material, shells, debris, detritus, dead animals and animal waste to prevent pollution of waters, wetlands, or the nearby coastline.	None are applicable.

Beverage Production in Rural Areas

Assessment Provisions (AP)

Desired Outcome	
DO 1	Mitigation of potential amenity and environmental impacts of value-adding beverage production facilities such as wineries, distilleries, cideries and breweries.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Odour and Noise	
P0 1.1	DTS/DPF 1.1
Beverage production activities are designed and sited to	None are applicable.

Page 43 of 140 Printed on 16/12/2021

Policy24 - Enquiry	
minimise odour impacts on rural amenity.	
PO 1.2	DTS/DPF 1.2
Beverage production activities are designed and sited to minimise noise impacts on sensitive receivers.	None are applicable.
PO 1.3	DTS/DPF 1.3
Fermentation, distillation, manufacturing, storage, packaging and bottling activities occur within enclosed buildings to improve the visual appearance within a locality and manage noise associated with these activities.	None are applicable.
PO 1.4	DTS/DPF 1.4
Breweries are designed to minimise odours emitted during boiling and fermentation stages of production.	Brew kettles are fitted with a vapour condenser.
PO 1.5	DTS/DPF 1.5
Beverage production solid wastes are stored in a manner that minimises odour impacts on sensitive receivers in other ownership.	Solid waste from beverage production is collected and stored in sealed containers and removed from the site within 48 hours.
Water	Quality
PO 2.1	DTS/DPF 2.1
Beverage production wastewater management systems (including wastewater irrigation) are set back from watercourses to minimise adverse impacts on water resources.	Wastewater management systems are set back 50m or more from the banks of watercourses and bores.
PO 2.2	DTS/DPF 2.2
The storage or disposal of chemicals or hazardous substances is undertaken in a manner to prevent pollution of water resources.	None are applicable.
PO 2.3	DTS/DPF 2.3
Stormwater runoff from areas that may cause contamination due to beverage production activities (including vehicle movements and machinery operations) is drained to an onsite stormwater treatment system to manage potential environmental impacts.	None are applicable.
PO 2.4	DTS/DPF 2.4
Stormwater runoff from areas unlikely to cause contamination by beverage production and associated activities (such as roof catchments and clean hard-paved surfaces) is diverted away from beverage production areas and wastewater management systems.	None are applicable.
Wastewat	er Irrigation
PO 3.1	DTS/DPF 3.1
Beverage production wastewater irrigation systems are designed and located to not contaminate soil and surface and ground water resources or damage crops.	None are applicable.
PO 3.2	DTS/DPF 3.2
Beverage production wastewater irrigation systems are	Beverage production wastewater is not irrigated within 50m of

Page 44 of 140 Printed on 16/12/2021

designed and located to minimise impact on amenity and avoid spray drift onto adjoining land.	any dwelling in other ownership.
PO 3.3	DTS/DPF 3.3
Beverage production wastewater is not irrigated onto areas that pose an undue risk to the environment or amenity such as:	None are applicable.
 (a) waterlogged areas (b) land within 50m of a creek, swamp or domestic or stock water bore (c) land subject to flooding (d) steeply sloping land (e) rocky or highly permeable soil overlaying an unconfined aquifer. 	

Bulk Handling and Storage Facilities

Assessment Provisions (AP)

	Desired Outcome
DO 1	Facilities for the bulk handling and storage of agricultural, mineral, petroleum, rock, ore or other similar commodities are designed to minimise adverse impacts on transport networks, the landscape and surrounding land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting	and Design
P0 1.1	DTS/DPF 1.1
Bulk handling and storage facilities are sited and designed to minimise risks of adverse air quality and noise impacts on sensitive receivers.	Facilities for the handling, storage and dispatch of commodities in bulk (excluding processing) meet the following minimum separation distances from sensitive receivers: (a) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals), where the handling of these materials into or from vessels does not exceed 100 tonnes per day: 300m or more from residential premises not associated with the facility
	(b) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility: 300m or more from residential premises not associated with the facility
	(c) bulk petroleum storage involving individual containers with a capacity up to 200 litres and a total on-site
Page 45 of 140	Printed on 16/12/2021

Page 45 of 140 Printed on 16/12/2021

Policy24 - Enquiry	
	storage capacity not exceeding 1,000 cubic metres: 500m or more (d) coal handling with: a. capacity up to 1 tonne per day or a storage capacity up to 50 tonnes: 500m or more b. capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes: 1000m or more.
Buffers and	Landscaping
PO 2.1	DTS/DPF 2.1
Bulk handling and storage facilities incorporate a buffer area for the establishment of dense landscaping adjacent road frontages to enhance the appearance of land and buildings from public thoroughfares.	None are applicable.
PO 2.2	DTS/DPF 2.2
Bulk handling and storage facilities incorporate landscaping to assist with screening and dust filtration.	None are applicable.
Access at	nd Parking
PO 3.1	DTS/DPF 3.1
Roadways and vehicle parking areas associated with bulk handling and storage facilities are designed and surfaced to control dust emissions and prevent drag out of material from the site.	Roadways and vehicle parking areas are sealed with an allweather surface.
Slipways, Wharves and Pontoons	
PO 4.1	DTS/DPF 4.1
Slipways, wharves and pontoons used for the handling of bulk materials (such as fuel, oil, catch, bait and the like) incorporate catchment devices to avoid the release of materials into adjacent waters.	None are applicable.

Clearance from Overhead Powerlines

Assessment Provisions (AP)

	Desired Outcome
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1

Page 46 of 140 Printed on 16/12/2021

Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of	the following is satisfied:
powermies to minimise potential nazara to people and property.	(a)	a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the <i>Electricity Act</i> 1996
	(b)	there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design

Assessment Provisions (AP)

		Desired Outcome
DO 1	Develo	opment is:
	(a) (b)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributes to the character of the immediate area durable - fit for purpose, adaptable and long lasting
	(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access, and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors
	(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
All deve	plopment
External A	ppearance
PO 1.1	DTS/DPF 1.1
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.
PO 1.2	DTS/DPF 1.2
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.
PO 1.3	DTS/DPF 1.3
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify	None are applicable.

Page 47 of 140 Printed on 16/12/2021

Policy24 - Enquiry	
main access points and complement the streetscape.	
PO 1.4	DTS/DPF 1.4
Plant, exhaust and intake vents and other technical equipment is integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by: (a) positioning plant and equipment in unobtrusive locations viewed from public roads and spaces (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses.	Development does not incorporate any structures that protrude beyond the roofline.
PO 1.5	DTS/DPF 1.5
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form) taking into account the form of development contemplated in the relevant zone.	None are applicable.
Sai	fety
PO 2.1	DTS/DPF 2.1
Development maximises opportunities for passive surveillance of the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.	None are applicable.
PO 2.2	DTS/DPF 2.2
Development is designed to differentiate public, communal and private areas.	None are applicable.
PO 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
PO 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings), and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	caping
PO 3.1	DTS/DPF 3.1
Soft landscaping and tree planting is incorporated to:	None are applicable.
(a) minimise heat absorption and reflection	

Page 48 of 140 Printed on 16/12/2021

Policy24 - Enquiry	
 (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes (e) contribute to biodiversity. 	
P0 3.2	DTS/DPF 3.2
Soft landscaping and tree planting maximises the use of locally indigenous plant species, incorporates plant species best suited to current and future climate conditions and avoids pest plant and weed species.	None are applicable.
Environmenta	l Performance
P0 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.
P0 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate-responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.
	itive Design
PO 5.1 Development is sited and designed to maintain natural hydrological systems without negatively impacting:	DTS/DPF 5.1 None are applicable.
(a) the quantity and quality of surface water and groundwater	
(b) the depth and directional flow of surface water and groundwater	
(c) the quality and function of natural springs.	
On-site Waste Tr	eatment Systems
PO 6.1	DTS/DPF 6.1
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	(a) encroach within an area used as private open space or result in less private open space than that specified in Design Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.

Page 49 of 140 Printed on 16/12/2021

Carparking	Appearance
PO 7.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as:	None are applicable.
 (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure. 	
P0 7.2	DTS/DPF 7.2
Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	None are applicable.
P0 7.3	DTS/DPF 7.3
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.
P0 7.4	DTS/DPF 7.4
Street level vehicle parking areas incorporate tree planting to provide shade and reduce solar heat absorption and reflection.	None are applicable.
PO 7.5	DTS/DPF 7.5
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	None are applicable.
PO 7.6	DTS/DPF 7.6
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
PO 7.7	DTS/DPF 7.7
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.
Earthworks ar	nd sloping land
PO 8.1	DTS/DPF 8.1
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m
	(c) a total combined excavation and filling vertical height of 2m or more.
PO 8.2	DTS/DPF 8.2

Page 50 of 140 Printed on 16/12/2021

Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8).	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
 (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. 	
PO 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes onsite drainage systems to minimise erosion.	None are applicable.
PO 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip nor increases the potential for landslip or land surface instability.	None are applicable.
Fences	and Walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls are of sufficient height to maintain privacy and security without unreasonably impacting the visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.
PO 9.2	DTS/DPF 9.2
Landscaping incorporated on the low side of retaining walls is visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.
'	
·	r (in building 3 storeys or less)
·	o (in building 3 storeys or less) DTS/DPF 10.1

Page 51 of 140 Printed on 16/12/2021

PO 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses.	(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases
All Residential	development
Front elevations and	passive surveillance
PO 11.1 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	DTS/DPF 11.1 Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street.
PO 11.2	DTS/DPF 11.2
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.	Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.
Outlook an	nd amenity
Living rooms have an external outlook to provide a high standard	DTS/DPF 12.1 A living room of a dwelling incorporates a window with an
of amenity for occupants.	outlook towards the street frontage or private open space, public open space, or waterfront areas.
PO 12.2 Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	DTS/DPF 12.2 None are applicable.
Ancillary De	evelopment
PO 13.1 Residential ancillary buildings and structures are sited and designed to not detract from the streetscape or appearance of buildings on the site or neighbouring properties.	DTS/DPF 13.1 Ancillary buildings: (a) are ancillary to a dwelling erected on the same site (b) have a floor area not exceeding 60m2 (c) are not constructed, added to or altered so that any part is situated: (i) in front of any part of the building line of the

Page 52 of 140 Printed on 16/12/2021

dwelling to which it is ancillary

- (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads)
- (d) in the case of a garage or carport, the garage or carport:
 - (i) is set back at least 5.5m from the boundary of the primary street
 - (ii) when facing a primary street or secondary street, has a total door / opening not exceeding:
 - A. for dwellings of single building level -7m in width or 50% of the site frontage, whichever is the lesser
 - B. for dwellings comprising two or more building levels at the building line fronting the same public street 7m in width
- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
 - (i) a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary and
 - (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level
- (i) have a roof height where no part of the roof is more than 5m above the natural ground level
- (j) if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
 - (i) a total area as determined by the following

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%

Page 53 of 140 Printed on 16/12/2021

20		
	01-450	20%
>4	450	25%
	e amount of existing soft lan e development occurring.	dscaping prior to
DTS/DPF 13.2		
equirements such as private open space provision or requirements and do not result in over-development (a) less private Urban Areas (b) less on-site Access and Parking Rec	and structures do not result i e open space than specified i as Table 1 - Private Open Spa e car parking than specified i d Parking Table 1 - General C equirements or Table 2 - Off-S ents in Designated Areas.	in Design in Ice In Transport, Off-Street Car
DTS/DPF 13.3		
a swimming pool or spa is positioned and/or or cause unreasonable noise nuisance to adjacent ceivers. (a) enclosed in	iltration system is ancillary to ne site and is: n a solid acoustic structure the rom the nearest habitable roc	hat is located at
adjoining al or	allotment	
(b) located at le	least 12m from the nearest han adjoining allotment.	nabitable room
Garage appearance		
Garage appearance DTS/DPF 14.1 designed to not detract from the streetscape or Garages and carpor		
Garage appearance DTS/DPF 14.1 designed to not detract from the streetscape or of a dwelling. (a) are situated front of any	rts facing a street: d so that no part of the gara y part of the building line of t	he dwelling
Garage appearance DTS/DPF 14.1 designed to not detract from the streetscape or of a dwelling. (a) are situated front of any	rts facing a street: ed so that no part of the gara y part of the building line of t ck at least 5.5m from the bou	he dwelling
designed to not detract from the streetscape or of a dwelling. (a) are situated front of any (b) are set back primary streetscape or of the streetscape or of the streetscape or of any of the streetscape or of a dwelling.	rts facing a street: ed so that no part of the garag y part of the building line of t ck at least 5.5m from the bou reet age door / opening not excee	he dwelling undary of the eding 7m in width
designed to not detract from the streetscape or of a dwelling. (a) are situated front of any (b) are set back primary streetscape (c) have a gara of the site from the streetscape or of the	rts facing a street: Ind so that no part of the garage y part of the building line of the set at least 5.5m from the bounce reet age door / opening not exceed age door /opening width not frontage unless the dwelling wels at the building line fronti	he dwelling undary of the eding 7m in width exceeding 50% has two or more
Garage appearance DTS/DPF 14.1 designed to not detract from the streetscape or of a dwelling. (a) are situated front of any (b) are set back primary streetscape (c) have a gara of the site fit building level.	rts facing a street: Ind so that no part of the garage y part of the building line of the set at least 5.5m from the bounce reet age door / opening not exceed age door /opening width not frontage unless the dwelling wels at the building line fronti	he dwelling undary of the eding 7m in width exceeding 50% has two or more
Garage appearance DTS/DPF 14.1 designed to not detract from the streetscape or of a dwelling. (a) are situated front of any (b) are set back primary street (c) have a gara of the site fit building level public street	rts facing a street: Ind so that no part of the garage y part of the building line of the set at least 5.5m from the bounce reet age door / opening not exceed age door /opening width not frontage unless the dwelling wels at the building line fronti	he dwelling undary of the eding 7m in width exceeding 50% has two or more
Garage appearance DTS/DPF 14.1 designed to not detract from the streetscape or of a dwelling. (a) are situated front of any (b) are set back primary streets (c) have a gara of the site find building level public streets.	rts facing a street: Ind so that no part of the garage y part of the building line of the state at least 5.5m from the bounceet age door / opening not exceed age door /opening width not frontage unless the dwelling wels at the building line frontinet.	he dwelling undary of the eding 7m in width exceeding 50% has two or more
Garage appearance DTS/DPF 14.1 designed to not detract from the streetscape or of a dwelling. (a) are situated front of any (b) are set back primary streets (c) have a gara (d) have a gara of the site find building level public streets (c) have a gara of the site find building level public streets (d) have a gara of the site find building level public streets (e) have a gara of the site find building level public streets (find building level public streets (find building level public streets) (find building level public	rts facing a street: Ind so that no part of the garage y part of the building line of the state at least 5.5m from the bounceet age door / opening not exceed age door /opening width not frontage unless the dwelling wels at the building line frontinet.	he dwelling undary of the eding 7m in width exceeding 50% has two or more
Garage appearance DTS/DPF 14.1 Garages and carport of a dwelling. (a) are situated front of any (b) are set back primary stre (c) have a gara (d) have a gara of the site fi building leve public stree Massing DTS/DPF 15.1 None are applicable otments or public streets.	rts facing a street: Ind so that no part of the garage y part of the building line of the state at least 5.5m from the bounceet age door / opening not exceed age door /opening width not frontage unless the dwelling wels at the building line frontinet.	he dwelling undary of the eding 7m in width exceeding 50% has two or more
Garage appearance DTS/DPF 14.1 designed to not detract from the streetscape or of a dwelling. (a) are situated front of any (b) are set back primary streets (c) have a gara (d) have a gara of the site find building level public streets (c) have a gara of the site find building level public streets (d) have a gara of the site find building level public streets (e) have a gara of the site find building level public streets (find building level public streets (find building level public streets) (find building level public	rts facing a street: Ind so that no part of the garage y part of the building line of the state at least 5.5m from the bounceet age door / opening not exceed age door /opening width not frontage unless the dwelling wels at the building line frontinet.	he dwe indary eding 7 exceed has tw

Page 54 of 140 Printed on 16/12/2021

- (i) excavation exceeding a vertical height of 1m
- (ii) filling exceeding a vertical height of 1m
- (iii) a total combined excavation and filling vertical height of 2m or more
- (iv) less Private Open Space than specified in Design Table 1 Private Open Space
- (v) less on-site parking than specified in Transport Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas
- (vi) upper level windows facing side or rear boundaries unless:
 - A. they are permanently obscured to a height of 1.5m above finished floor level that is fixed or not capable of being opened more than 200mm or
 - B. have sill heights greater than or equal to 1.5m above finished floor level or
 - C. incorporate screening to a height of 1.5m above finished floor level
- (vii) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:
 - A. 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land
 - 1.7m above finished floor level in all other cases.

Private Open Space

PO 17.1

DTS/DPF 17.1

Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.

Private open space is provided in accordance with Design Table 1 - Private Open Space.

Water Sensitive Design

PO 18.1

DTS/DPF 18.1

Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.

Residential development creating a common driveway / access that services 5 or more dwellings achieves the following stormwater runoff outcomes:

- (a) 80 per cent reduction in average annual total suspended solids
- (b) 60 per cent reduction in average annual total phosphorus
- (c) 45 per cent reduction in average annual total nitrogen.

PO 18.2

DTS/DPF 18.2

Residential development creating a common driveway / access includes a stormwater management system designed to

Development creating a common driveway / access that services 5 or more dwellings:

Page 55 of 140 Printed on 16/12/2021

mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.

(a) maintains the pre-development peak flow rate from the site based upon a 0.35 runoff coefficient for the 18.1% AEP 30-minute storm and the stormwater runoff time to peak is not increased

٥r

- captures and retains the difference in pre-development runoff volume (based upon a 0.35 runoff coefficient) vs post development runoff volume from the site for an 18.1% AEP 30-minute storm; and
- (b) manages site generated stormwater runoff up to and including the 1% AEP flood event to avoid flooding of buildings.

Car parking, access and manoeuvrability

PO 19.1

Enclosed parking spaces are of a size and dimensions to be functional, accessible and convenient.

DTS/DPF 19.1

Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage area):

- (a) single width car parking spaces:
 - (i) a minimum length of 5.4m per space
 - (ii) a minimum width of 3.0m
 - (iii) a minimum garage door width of 2.4m
- (b) double width car parking spaces (side by side):
 - (i) a minimum length of 5.4m
 - (ii) a minimum width of 5.4m
 - (iii) minimum garage door width of 2.4m per space.

PO 19.2

Uncovered parking spaces are of a size and dimensions to be functional, accessible and convenient.

DTS/DPF 19.2

Uncovered car parking spaces have:

- (a) a minimum length of 5.4m
- (b) a minimum width of 2.4m
- (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m

PO 19.3

Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages, domestic waste collection and onstreet parking.

DTS/DPF 19.3

Driveways and access points on sites with a frontage to a public road of 10m or less have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site.

PO 19.4

Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.

DTS/DPF 19.4

Vehicle access to designated car parking spaces satisfy (a) or (b):

- (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land
- (b) where newly proposed:
 - (i) is set back 6m or more from the tangent point of an intersection of 2 or more roads
 - (ii) is set back outside of the marked lines or

Page 56 of 140 Printed on 16/12/2021

	infrastructure dedicating a pedestrian crossing (iii) does not involve the removal, relocation or damage to of mature street trees, street furniture or utility infrastructure services.
PO 19.5	DTS/DPF 19.5
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	Driveways are designed and sited so that: (a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1:4 on average (b) they are aligned relative to the street boundary so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the street boundary (c) if located to provide access from an alley, lane or right of way - the alley, land or right or way is at least 6.2m wide along the boundary of the allotment / site
P0 19.6	DTS/DPF 19.6
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
Waste	storage
PO 20.1 Provision is made for the adequate and convenient storage of waste bins in a location screened from public view.	DTS/DPF 20.1 None are applicable.
Design of Trans	portable Dwellings
PO 21.1 The sub-floor space beneath transportable buildings is enclosed to give the appearance of a permanent structure.	DTS/DPF 21.1 Buildings satisfy (a) or (b): (a) are not transportable or (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building.
Group dwelling, residential flat bu	ildings and battle-axe development
Am	enity
PO 22.1 Dwellings are of a suitable size to accommodate a layout that is well organised and provides a high standard of amenity for occupants.	DTS/DPF 22.1 Dwellings have a minimum internal floor area in accordance with the following table:

Page 57 of 140 Printed on 16/12/2021

Policy24 - Enquiry	11	I
	Number of bedrooms	Minimum internal floor area
	Studio	35m ²
	1 bedroom	50m ²
	2 bedroom	65m ²
	3+ bedrooms	80m ² and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom
PO 22.2	DTS/DPF 22.2	
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	None are applicable.	
PO 22.3	DTS/DPF 22.3	
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.	None are applicable.	
PO 22.4	DTS/DPF 22.4	
Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	Dwelling sites/allotments are not in the form of a battle-axe arrangement.	
Communal	Open Space	
PO 23.1	DTS/DPF 23.1	
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.	
PO 23.2	DTS/DPF 23.2	
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorpor metres.	ates a minimum dimension of 5
PO 23.3	DTS/DPF 23.3	
Communal open space is designed and sited to:	None are applicable.	
(a) be conveniently accessed by the dwellings which it services		
(b) have regard to acoustic, safety, security and wind effects.		
P0 23.4	DTS/DPF 23.4	
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.	
PO 23.5	DTS/DPF 23.5	
Communal open space is designed and sited to:	None are applicable.	
age 58 of 140	I	Printed on 16/12/202

Page 58 of 140 Printed on 16/12/2021

- (a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings
- (b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.

Carparking, access and manoeuvrability

PO 24.1

Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.

DTS/DPF 24.1

Where on-street parking is available directly adjacent the site, onstreet parking is retained adjacent the subject site in accordance with the following requirements:

- (a) minimum 0.33 on-street car parks per proposed dwellings (rounded up to the nearest whole number)
- (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly
- (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.

PO 24 2

The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.

DTS/DPF 24.2

Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.

PO 24.3

Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.

DTS/DPF 24.3

Driveways that service more than 1 dwelling or a dwelling on a battle-axe site:

- (a) have a minimum width of 3m
- (b) for driveways servicing more than 3 dwellings:
 - (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street
 - (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.

PO 24.4

Residential driveways in a battle-axe configuration are designed to allow safe and convenient movement.

DTS/DPF 24.4

Where in a battle-axe configuration, a driveway servicing one dwelling has a minimum width of 3m.

PO 24.5

Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.

DTS/DPF 24.5

Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.

PO 24.6

Dwellings are adequately separated from common driveways and manoeuvring areas.

DTS/DPF 24.6

Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.

Soft Landscaping

Page 59 of 140 Printed on 16/12/2021

of common areas. PO 25.2 Soft landscaping is provided that improves the appearance of common driveways. DTS/DPF 25.2 Where a common driveway is located directly adjacent the si or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site	Policy24 - Enquiry		
driveways to improve the outlook for occupants and appearance of common areas. Do 252 Do 252 Soft landscaping is provided that improves the appearance of common driveways. Do 257 Soft landscaping is provided that improves the appearance of common driveways. Soft landscaping is provided that improves the appearance of common driveways. Soft landscaping is provided between the driveway and site boundary (excluding along the perimeter of a passing point). Site Faulties / Watel Sorage DO 26.1 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. Po 26.2 Provision is made for suitable external clothes drying facilities. Po 26.2 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. Po 26.4 Waste and recyclable material storage areas are located away from dwellings. DO 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-aite waste collection, designed to accommodate the safe and convenient access, agress and movement of waste collection vehicles. Po 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retrement facilities Soing and Configuration DOS/DPF 26.6 None are applicable. DOS/DPF 26.6 None are applicable.	PO 25.1	DTS/DPF 25.1	
Soft landscaping is provided that improves the appearance of common driveways. Where a common driveway is located directly adjacent the sorrear boundary of the site, soft landscaping with a minimum dimension of 1 m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). Site Facilities / Waste Storage Po 26.1 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. Po 26.2 Provision is made for suitable external clothes drying facilities. Po 26.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. Po 26.4 Waste and recyclable material storage areas are located away from dwellings. Po 26.5 Where a common driveway is located directly adjacent the sor rear boundary of the site, soft landscaping with at minimum dimension of 1 m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). None are applicable. DTS/DFF 26.2 None are applicable. DTS/DFF 26.4 Dedicated waste and recyclable material storage areas are located away from dwellings. DTS/DFF 26.4 DES/DFF 26.4 DES/DFF 26.5 None are applicable. DTS/DFF 26.5 None are applicable. DTS/DFF 26.6 None are applicable. DTS/DFF 26.6 None are applicable.	driveways to improve the outlook for occupants and appearance	building entry, soft landscaping with a minimum dimension of 1m	
or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point). Site Facilities Po 26.1 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. Po 26.2 Provision is made for suitable external clothes drying facilities. Po 26.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) Incasted away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. Po 26.4 Waste and recyclable material storage areas are located away from dwellings. Po 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. Po 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration DTS/OPF 26.1 None are applicable. PISYOPF 26.6 None are applicable. DTS/OPF 26.5 None are applicable.	PO 25.2	DTS/DPF 25.2	
Po 26.1 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. Po 26.2 Provision is made for suitable external clothes drying facilities. Po 26.3 Provision is made for suitable external clothes drying facilities. Po 26.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. Po 26.4 Waste and recyclable material storage areas are located away from dwellings. Po 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. Po 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration DTS/DPF 26.1 None are applicable. DTS/DPF 26.5 None are applicable. Solution and retirement facilities Siting and Configuration DTS/DPF 27.1 None are applicable.		Where a common driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 26.2 Provision is made for suitable external clothes drying facilities. PO 26.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. PO 26.4 Waste and recyclable material storage areas are located away from dwellings. PO 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, geress and movement of waste collection vehicles. PO 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration DIS/OPF 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	Site Facilities a	Waste Storage	
major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 26.2 Provision is made for suitable external clothes drying facilities. PO 26.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. PO 26.4 Waste and recyclable material storage areas are located away from dwellings. PO 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. PO 26.6 Services including gas and water meters are conveniently located and screened from public view. DIS/DPF 26.6 None are applicable. DIS/DPF 26.5 None are applicable. DIS/DPF 26.6 None are applicable. None are applicable.	PO 26.1	DTS/DPF 26.1	
Provision is made for suitable external clothes drying facilities. PO 26.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. PD 26.4 Waste and recyclable material storage areas are located away from dwellings. DTS/DPF 26.4 Waste and recyclable material storage areas are located away from dwellings. DTS/DPF 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. PD 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration PD 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of	None are applicable.	
Po 26.3 Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. Po 26.4 Waste and recyclable material storage areas are located away from dwellings. Po 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. Po 26.6 Services including gas and water meters are conveniently located and screened from public view. DTS/DPF 26.6 Services including gas and water meters are conveniently located and screened from public view. DTS/DPF 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	PO 26.2	DTS/DPF 26.2	
Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. Po 26.4 Waste and recyclable material storage areas are located away from dwellings. DTS/DPF 26.4 Waste and recyclable material storage areas are located away from dwellings. DTS/DPF 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. PO 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration DTS/DPF 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	Provision is made for suitable external clothes drying facilities.	None are applicable.	
material storage facilities which are: (a) located away, or screened, from public view, and (b) conveniently located in proximity to dwellings and the waste collection point. PO 26.4 Waste and recyclable material storage areas are located away from dwellings. DTS/DPF 26.4 Dedicated waste and recyclable material storage areas are located away located at least 3m from any habitable room window. PO 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. PO 26.6 Services including gas and water meters are conveniently located and screened from public view. DTS/DPF 26.6 None are applicable. DTS/DPF 26.6 None are applicable. DTS/DPF 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	PO 26.3	DTS/DPF 26.3	
(b) conveniently located in proximity to dwellings and the waste collection point. PO 26.4 Waste and recyclable material storage areas are located away from dwellings. PO 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. PO 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Sitting and Configuration PO 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	-	None are applicable.	
Waste and recyclable material storage areas are located away from dwellings. PO 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. PO 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration PO 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	(b) conveniently located in proximity to dwellings and the		
from dwellings. Po 26.5 Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. Po 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration Po 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	PO 26.4	DTS/DPF 26.4	
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. PO 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration PO 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.		•	
street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles. PO 26.6 Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration PO 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	PO 26.5	DTS/DPF 26.5	
Services including gas and water meters are conveniently located and screened from public view. Supported accommodation and retirement facilities Siting and Configuration PO 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land. None are applicable. DTS/DPF 27.1 None are applicable.	street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and	1	
Supported accommodation and retirement facilities Siting and Configuration PO 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	P0 26.6	DTS/DPF 26.6	
PO 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land. DTS/DPF 27.1 None are applicable.		None are applicable.	
PO 27.1 Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land. DTS/DPF 27.1 None are applicable.	Supported accommodation	on and retirement facilities	
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land. None are applicable.	Siting and Configuration		
people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	P0 27.1	DTS/DPF 27.1	
Movement and Access	people with disabilities is located where on-site movement of	None are applicable.	
	Movement	and Access	
PO 28.1 DTS/DPF 28.1	PO 28.1	DTS/DPF 28.1	

Page 60 of 140 Printed on 16/12/2021

Development is designed to support safe and convenient access

and movement for residents by providing: ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40 and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. Communal Open Space PO 29.1 DTS/DPF 29.1 Development is designed to provide attractive, convenient and None are applicable. comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 29.2 DTS/DPF 29.2 Private open space provision may be substituted for communal None are applicable. open space which is designed and sited to meet the recreation and amenity needs of residents. PO 29.3 DTS/DPF 29.3 Communal open space is of sufficient size and dimensions to Communal open space incorporates a minimum dimension of 5 cater for group recreation. metres. PO 29.4 DTS/DPF 29.4 Communal open space is designed and sited to: None are applicable. (a) be conveniently accessed by the dwellings which it (b) have regard to acoustic, safety, security and wind effects. PO 29.5 **DTS/DPF 29.5** Communal open space contains landscaping and facilities that None are applicable. are functional, attractive and encourage recreational use. PO 29.6 DTS/DPF 29.6 Communal open space is designed and sited to: None are applicable. (a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings (b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance. Site Facilities / Waste Storage PO 30.1 DTS/DPF 30.1 Development is designed to provide storage areas for personal None are applicable. items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric powered vehicles.

None are applicable.

Page 61 of 140 Printed on 16/12/2021

PO 30.2	DTS/DPF 30.2	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.	
PO 30.3	DTS/DPF 28.3	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 30.4	DTS/DPF 30.4	
Provision is made for suitable household waste and recyclable material storage facilities conveniently located and screened from public view.	None are applicable.	
PO 30.5	DTS/DPF 30.5	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 30.6	DTS/DPF 30.6	
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.	
PO 30.7	DTS/DPF 30.7	
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.	
All non-residential development		

Water Sensitive Design		
PO 31.1	DTS/DPF 31.1	
Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.	
PO 31.2	DTS/DPF 31.2	
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.	None are applicable.	

	al and biological condition equivalent to or better than its veloped state.	
	Wash-down and Waste	Loading and Unloading
PO 32.1		DTS/DPF 32.1
waste r wash-d	or activities including loading and unloading, storage of refuse bins in commercial and industrial development or own areas used for the cleaning of vehicles, vessels, plant pment are:	None are applicable.
(a)	designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off	
(b)	paved with an impervious material to facilitate wastewater collection	
(c)	of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area	

Page 62 of 140 Printed on 16/12/2021

- (d) designed to drain wastewater to either:
 - (i) a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or
 - (ii) a holding tank and its subsequent removal offsite on a regular basis.

Table 1 - Private Open Space

Dwelling Type	Minimum Rate
Dwelling (at ground level)	Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Dwelling (above ground level)	Studio (no separate bedroom): $4m^2$ with a minimum dimension 1.8m One bedroom: $8m^2$ with a minimum dimension 2.1m Two bedroom dwelling: $11m^2$ with a minimum dimension 2.4m Three + bedroom dwelling: $15m^2$ with a minimum dimension 2.6m
Cabin or caravan (permanently fixed to the ground) in a residential park or a caravan and tourist park	Total area: 16m ² , which may be used as second car parking space, provided on each site intended for residential occupation.

Design in Urban Areas

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Develo	opment is:	
	(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality	
	(b)	durable - fit for purpose, adaptable and long lasting	
	(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors	
	(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and	

Page 63 of 140 Printed on 16/12/2021

local amenity and to minimise energy consumption.

Performance Outcome Deemed-to-Satisfy Criteria / **Designated Performance Feature** All Development **External Appearance** PO 1.1 DTS/DPF 1.1 Buildings reinforce corners through changes in setback, None are applicable. articulation, materials, colour and massing (including height, width, bulk, roof form and slope). PO 1.2 DTS/DPF 1.2 Where zero or minor setbacks are desirable, development None are applicable. provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm. PO 1.3 DTS/DPF 1.3 Building elevations facing the primary street (other than ancillary None are applicable. buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape. PO 1.4 DTS/DPF 1.4 Plant, exhaust and intake vents and other technical equipment are Development does not incorporate any structures that protrude integrated into the building design to minimise visibility from the beyond the roofline. public realm and negative impacts on residential amenity by: (a) positioning plant and equipment discretely, in unobtrusive locations as viewed from public roads and (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses. PO 1.5 DTS/DPF 1.5 The negative visual impact of outdoor storage, waste None are applicable. management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone. Safety PO 2.1 DTS/DPF 2.1 Development maximises opportunities for passive surveillance of None are applicable. the public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable.

Page 64 of 140 Printed on 16/12/2021

Policy24 - Enquiry		
P0 2.2	DTS/DPF 2.2	
Development is designed to differentiate public, communal and private areas.	None are applicable.	
PO 2.3	DTS/DPF 2.3	
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.	
PO 2.4	DTS/DPF 2.4	
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.	
PO 2.5	DTS/DPF 2.5	
Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.	
Lands	scaping	
P0 3.1	DTS/DPF 3.1	
Soft landscaping and tree planting are incorporated to:	None are applicable.	
(a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration (d) enhance the appearance of land and streetscapes.		
Environmenta	l Performance	
PO 4.1	DTS/DPF 4.1	
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.	
PO 4.2	DTS/DPF 4.2	
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.	
PO 4.3	DTS/DPF 4.3	
Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.	
Water Sensitive Design		
PO 5.1	DTS/DPF 5.1	
Development is sited and designed to maintain natural hydrological systems without negatively impacting:	None are applicable.	

Page 65 of 140 Printed on 16/12/2021

Policy24 - Enquiry (a) the quantity and quality of surface water and groundwater (b) the depth and directional flow of surface water and aroundwater (c) the quality and function of natural springs. PO 6.1

On-site Waste Treatment Systems

Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.

DTS/DPF 6.1

Effluent disposal drainage areas do not:

- (a) encroach within an area used as private open space or result in less private open space than that specified in Design in Urban Areas Table 1 - Private Open Space
- (b) use an area also used as a driveway
- (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.

Car parking appearance

PO 7.1

Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on streetscapes through techniques such as:

- (a) limiting protrusion above finished ground level
- (b) screening through appropriate planting, fencing and mounding
- (c) limiting the width of openings and integrating them into the building structure.

DTS/DPF 7.1

None are applicable.

PO 7.2

Vehicle parking areas appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.

DTS/DPF 7.2

None are applicable.

PO 7.3

Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.

DTS/DPF 7.3

None are applicable.

PO 7.4

Street-level vehicle parking areas incorporate tree planting to provide shade, reduce solar heat absorption and reflection.

DTS/DPF 7.4

Vehicle parking areas that are open to the sky and comprise 10 or more car parking spaces include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking spaces provided and a landscaped strip on any road frontage of a minimum dimension of 1m.

PO 7.5

Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.

DTS/DPF 7.5

Vehicle parking areas comprising 10 or more car parking spaces include soft landscaping with a minimum dimension of:

- (a) 1m along all public road frontages and allotment boundaries
- (b) 1m between double rows of car parking spaces.

Printed on 16/12/2021 Page 66 of 140

PO 7.6	DTS/DPF 7.6
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
PO 7.7	DTS/DPF 7.7
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.
Earthworks a	nd sloping land
PO 8.1	DTS/DPF 8.1
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more.
PO 8.2	DTS/DPF 8.2
Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
 (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. 	
PO 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on site drainage systems to minimise erosion.	None are applicable.
P0 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip or increase the potential for landslip or land surface instability.	None are applicable.
Fences	and walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls of sufficient height maintain privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.

Page 67 of 140 Printed on 16/12/2021

Policy24 - Enquiry PO 9.2 DTS/DPF 9.2 Landscaping is incorporated on the low side of retaining walls A vegetated landscaped strip 1m wide or more is provided that are visible from public roads and public open space to against the low side of a retaining wall. minimise visual impacts. Overlooking / Visual Privacy (low rise buildings) PO 10.1 DTS/DPF 10.1 Development mitigates direct overlooking from upper level Upper level windows facing side or rear boundaries shared with a windows to habitable rooms and private open spaces of residential use in a neighbourhood-type zone: adjoining residential uses in neighbourhood-type zones. are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 125mm (b) have sill heights greater than or equal to 1.5m above finished floor level (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level. PO 10.2 DTS/DPF 10.2 Development mitigates direct overlooking from balconies to One of the following is satisfied: habitable rooms and private open space of adjoining residential uses in neighbourhood type zones. the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land (ii) 1.7m above finished floor level in all other cases

Site Facilities / Waste Storage (excluding low rise residential development)		
PO 11.1	DTS/DPF 11.1	
Development provides a dedicated area for on-site collection and sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection.	None are applicable.	
PO 11.2	DTS/DPF 11.2	
Communal waste storage and collection areas are located, enclosed and designed to be screened from view from the public domain, open space and dwellings.	None are applicable.	
PO 11.3	DTS/DPF 11.3	
Communal waste storage and collection areas are designed to be well ventilated and located away from habitable rooms.	None are applicable.	
PO 11.4	DTS/DPF 11.4	
Communal waste storage and collection areas are designed to allow waste and recycling collection vehicles to enter and leave the site without reversing.	None are applicable.	

Page 68 of 140 Printed on 16/12/2021

PO 11.5	DTS/DPF 11.5	
For mixed use developments, non-residential waste and recycling storage areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate.	None are applicable.	
All Development - M	ledium and High Rise	
External A	ppearance	
PO 12.1	DTS/DPF 12.1	
Buildings positively contribute to the character of the local area by responding to local context.	None are applicable.	
PO 12.2	DTS/DPF 12.2	
Architectural detail at street level and a mixture of materials at lower building levels near the public interface are provided to reinforce a human scale.	None are applicable.	
PO 12.3	DTS/DPF 12.3	
Buildings are designed to reduce visual mass by breaking up building elevations into distinct elements.	None are applicable.	
PO 12.4	DTS/DPF 12.4	
Boundary walls visible from public land include visually interesting treatments to break up large blank elevations.	None are applicable.	
PO 12.5	DTS/DPF 12.5	
External materials and finishes are durable and age well to minimise ongoing maintenance requirements.	Buildings utilise a combination of the following external materia and finishes:	
	(a) masonry (b) natural stone (c) pre-finished materials that minimise staining, discolouring or deterioration.	
PO 12.6	DTS/DPF 12.6	
Street-facing building elevations are designed to provide attractive, high quality and pedestrian-friendly street frontages.	Building street frontages incorporate:	
	 (a) active uses such as shops or offices (b) prominent entry areas for multi-storey buildings (where it is a common entry) (c) habitable rooms of dwellings (d) areas of communal public realm with public art or the like, where consistent with the zone and/or subzone provisions. 	
PO 12.7	DTS/DPF 12.7	
Entrances to multi-storey buildings are safe, attractive, welcoming, functional and contribute to streetscape character.	Entrances to multi-storey buildings are: (a) oriented towards the street	
	(b) clearly visible and easily identifiable from the street and vehicle parking areas	
	(c) designed to be prominent, accentuated and a welcoming feature if there are no active or occupied ground floor uses	
	(d) designed to provide shelter, a sense of personal	

Page 69 of 140 Printed on 16/12/2021

Policy24 - Enquiry				
	address and transitional space around the entry (e) located as close as practicable to the lift and / or lobby access to minimise the need for long access corridors (f) designed to avoid the creation of potential areas of entrapment.			
PO 12.8	DTS/DPF 12.8			
Building services, plant and mechanical equipment are screened from the public realm.	None are applicable.			
Lands	scaping			
PO 13.1	DTS/DPF 13.1			
Development facing a street provides a well landscaped area that contains a deep soil space to accommodate a tree of a species and size adequate to provide shade, contribute to tree canopy targets and soften the appearance of buildings.	Buildings provide a 4m by 4m deep soil space in front of the building that accommodates a medium to large tree, except where no building setback from front property boundaries is desired.			
PO 13.2	DTS/DPF 13.2			
Deep soil zones are provided to retain existing vegetation or provide areas that can accommodate new deep root vegetation, including tall trees with large canopies to provide shade and soften the appearance of multi-storey buildings.	Multi-storey development provides deep soil zones and incorporates trees at not less than the following rates, except in a location or zone where full site coverage is desired.			
	Site area	Minimum deep soil area	Minimum dimension	Tree / deep soil zones
	<300 m ²	10 m ²	1.5m	1 small tree / 10 m ²
	300-1500 m ²	7% site area	3m	1 medium tree / 30 m ²
	>1500 m ²	7% site area	6m	1 large or medium tree / 60 m ²
	Tree size and site area definitions			
	Small tree	4-6m mature height and 2-4m canopy spread		
	Medium tree	6-12m mature height and 4-8m canopy spread		
	Large tree	12m mature height and >8m canopy spread		
	Site area	The total area for development site, not average area per dwelling		
PO 13.3	DTS/DPF 13.3			
Deep soil zones with access to natural light are provided to assist in maintaining vegetation health.	None are applicable.			
P0 13.4	DTS/DPF 13.4			

Page 70 of 140 Printed on 16/12/2021

Unless separated by a public road or reserve, development sites adjacent to any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height.

Building elements of 3 or more building levels in height are set back at least 6m from a zone boundary in which a deep soil zone area is incorporated.

Enviro	nmental			
PO 14.1	DTS/DPF 14.1			
Development minimises detrimental micro-climatic impacts on adjacent land and buildings.	None are applicable.			
PO 14.2	DTS/DPF 14.2			
Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells.				
PO 14.3	DTS/DPF 14.3			
Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as: (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level.	None are applicable.			
Car F	· Parking			
PO 15.1	DTS/DPF 15.1			
Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings.	(a) provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings.			
PO 15.2	DTS/DPF 15.2			
Multi-level vehicle parking structures within buildings complement the surrounding built form in terms of height, massing and scale.	None are applicable.			
Overlooking/Visual Privacy				
PO 16.1	DTS/DPF 16.1			

Page 71 of 140 Printed on 16/12/2021

Policy24 - Enquiry None are applicable. Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as: (a) appropriate site layout and building orientation (b) off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight (c) building setbacks from boundaries (including building boundary to boundary where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms (d) screening devices that are integrated into the building design and have minimal negative effect on residents' or

neighbours' amenity.					
All residentia	Il development				
Front elevations and passive surveillance					
PO 17.1	DTS/DPF 17.1				
Dwellings incorporate windows facing primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	 (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street. 				
PO 17.2	DTS/DPF 17.2				
Dwellings incorporate entry doors within street frontages to address the street and provide a legible entry point for visitors.	Dwellings with a frontage to a public street have an entry door visible from the primary street boundary.				
Outlook a	nd Amenity				
PO 18.1	DTS/DPF 18.1				
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an external outlook of the street frontage, private open space, publi open space, or waterfront areas.				
PO 18.2	DTS/DPF 18.2				
Bedrooms are separated or shielded from active communal recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion.	None are applicable.				
Ancillary Development					
PO 19.1	DTS/DPF 19.1				

Residential ancillary buildings are sited and designed to not detract from the streetscape or appearance of primary residential buildings on the site or neighbouring properties.

Ancillary buildings:

- (a) are ancillary to a dwelling erected on the same site
- (b) have a floor area not exceeding 60m2
- (c) are not constructed, added to or altered so that any part is situated:
 - in front of any part of the building line of the dwelling to which it is ancillary
 - (ii) within 900mm of a boundary of the allotment

Page 72 of 140 Printed on 16/12/2021

with a secondary street (if the land has boundaries on two or more roads)

- (d) in the case of a garage or carport, the garage or carport:
 - (i) is set back at least 5.5m from the boundary of the primary street
 - (ii) when facing a primary street or secondary street, has a total door / opening not exceeding:
 - A. for dwellings of single building level -7m in width or 50% of the site frontage, whichever is the lesser
 - B. for dwellings comprising two or more building levels at the building line fronting the same public street 7m in width
- (e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
 - (i) a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary and
 - (ii) the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent
- (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary
- (g) will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure
- (h) have a wall height or post height not exceeding 3m above natural ground level
- (i) have a roof height where no part of the roof is more than 5m above the natural ground level
- (j) if clad in sheet metal, is pre-colour treated or painted in a non-reflective colour
- (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less:
 - (i) a total area as determined by the following table:

Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m ²)	Minimum percentage of site
<150	10%
150-200	15%
201-450	20%

Page 73 of 140 Printed on 16/12/2021

			>450	25%
	((ii)	the amount of existing the development occ	ng soft landscaping prior to curring.
PO 19.2	DTS/DPF 19.2	2		
Ancillary buildings and structures do not impede on-site functional requirements such as private open space provision, car parking requirements or result in over-development of the site.	Ancillary buildings and structures do not result in: (a) less private open space than specified in Design in Urban Areas Table 1 - Private Open Space (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.			
PO 19.3 Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers.	DTS/DPF 19.3 The pump and/or filtration system is ancillary to a dwelling erected on the same site and is: (a) enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on a adjoining allotment or (b) located at least 12m from the nearest habitable room located on an adjoining allotment.			
Residential Deve	lopment - Low R	Rise		
External	appearance			
PO 20.1 Garaging is designed to not detract from the streetscape or appearance of a dwelling.	(a) are be (b) are pri (c) ha (d) ha of bu	e situe in from the set imary we a the set illding	ont of any part of the l back at least 5.5m fro / street garage door / opening garage door / opening site frontage unless th	of the garage or carport will building line of the dwelling om the boundary of the g width not exceeding 7m g width not exceeding 50% e dwelling has two or more line fronting the same
P0 20.2	DTS/DPF 20.2	2		
Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the	Each dwelling includes at least 3 of the following design feature within the building elevation facing a primary street, and at least			

appearance of common driveway areas.

2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway:

- a minimum of 30% of the building wall is set back an additional 300mm from the building line
- (b) a porch or portico projects at least 1m from the building wall
- (c) a balcony projects from the building wall
- (d) a verandah projects at least 1m from the building wall
- (e) eaves of a minimum 400mm width extend along the

Page 74 of 140 Printed on 16/12/2021

width of the front elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm a minimum of two different materials or finishes are incorporated on the walls of the front building elevation, with a maximum of 80% of the building elevation in a single material or finish. PO 20.3 DTS/DPF 20.3 The visual mass of larger buildings is reduced when viewed from None are applicable adjoining allotments or public streets. Private Open Space PO 21.1 DTS/DPF 21.1 Dwellings are provided with suitable sized areas of usable private Private open space is provided in accordance with Design in open space to meet the needs of occupants. Urban Areas Table 1 - Private Open Space. PO 21.2 DTS/DPF 21.2 Private open space is positioned to provide convenient access Private open space is directly accessible from a habitable room. from internal living areas. Landscaping PO 22.1 DTS/DPF 22.1 Residential development incorporates soft landscaping with a Soft landscaping is incorporated into development to: minimum dimension of 700mm provided in accordance with (a) (a) minimise heat absorption and reflection and (b): (b) contribute shade and shelter a total area as determined by the following table: (c) provide for stormwater infiltration and biodiversity (d) enhance the appearance of land and streetscapes. Minimum Dwelling site area (or in the case of residential flat building or group percentage of site dwelling(s), average site area) (m²) <150 10% 150-200 15% >200-450 20% >450 25% (b) at least 30% of any land between the primary street boundary and the primary building line. Car parking, access and manoeuvrability PO 23.1 DTS/DPF 23.1

Page 75 of 140 Printed on 16/12/2021

Enclosed car parking spaces are of dimensions to be functional, Residential car parking spaces enclosed by fencing, walls or accessible and convenient. other structures have the following internal dimensions (separate from any waste storage area): (a) single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space. PO 23.2 DTS/DPF 23.2 Uncovered car parking space are of dimensions to be functional, Uncovered car parking spaces have: accessible and convenient. a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m. PO 23.3 DTS/DPF 23.3 Driveways and access points are located and designed to Driveways and access points satisfy (a) or (b): facilitate safe access and egress while maximising land available sites with a frontage to a public road of 10m or less, for street tree planting, domestic waste collection, landscaped have a width between 3.0 and 3.2 metres measured at street frontages and on-street parking. the property boundary and are the only access point provided on the site (b) sites with a frontage to a public road greater than 10m: have a maximum width of 5m measured at the property boundary and are the only access point provided on the site; have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m. PO 23.4 DTS/DPF 23.4 Vehicle access is safe, convenient, minimises interruption to the Vehicle access to designated car parking spaces satisfy (a) or operation of public roads and does not interfere with street (b): infrastructure or street trees. (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance

Page 76 of 140 Printed on 16/12/2021

(iii)

6m or more from the tangent point of an

outside of the marked lines or infrastructure

intersection of 2 or more roads

	dedicating a pedestrian crossing.
DO 22 F	DTC/DDC 22 F
PO 23.5 Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	DTS/DPF 23.5 Driveways are designed and sited so that: (a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1-in-4 on average (b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. (c) if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least
PO 23.6	6.2m wide along the boundary of the allotment / site DTS/DPF 23.6
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
Waste	storage
PO 24.1	DTS/DPF 24.1
Provision is made for the convenient storage of waste bins in a location screened from public view.	Where dwellings abut both side boundaries a waste bin storage area is provided behind the building line of each dwelling that: (a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space); and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bir storage area and the street.
Design of Transp	oortable Buildings
PO 25.1	DTS/DPF 25.1
The sub-floor space beneath transportable buildings is enclosed to give the appearance of a permanent structure.	Buildings satisfy (a) or (b): (a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building.
Residential Development - Medium and H	High Rise (including serviced apartments)
	Visual Privacy

Page 77 of 140 Printed on 16/12/2021

1 Shoy24 Enquiry	
Ground level dwellings have a satisfactory short range visual outlook to public, communal or private open space.	Buildings: (a) provide a habitable room at ground or first level with a window facing toward the street (b) limit the height / extent of solid walls or fences facing the street to 1.2m high above the footpath level or, where higher, to 50% of the site frontage.
PO 26.2	DTS/DPF 26.2
The visual privacy of ground level dwellings within multi-level buildings is protected.	The finished floor level of ground level dwellings in multi-storey developments is raised by up to 1.2m.
Private 0	pen Space
PO 27.1	DTS/DPF 27.1
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space.
Residential amenity	in multi-level buildings
PO 28.1	DTS/DPF 28.1
Residential accommodation within multi-level buildings have habitable rooms, windows and balconies designed and positioned to be separated from those of other dwellings and accommodation to provide visual and acoustic privacy and allow for natural ventilation and the infiltration of daylight into interior and outdoor spaces.	Habitable rooms and balconies of independent dwellings and accommodation are separated by at least 6m from one another where there is a direct line of sight between them and 3m or more from a side or rear property boundary.
PO 28.2	DTS/DPF 28.2
Balconies are designed, positioned and integrated into the overall architectural form and detail of the development to:	Balconies utilise one or a combination of the following design elements:
(a) respond to daylight, wind, and acoustic conditions to maximise comfort and provide visual privacy (b) allow views and casual surveillance of the street while providing for safety and visual privacy of nearby living spaces and private outdoor areas.	(a) sun screens (b) pergolas (c) louvres (d) green facades (e) openable walls.
PO 28.3	DTS/DPF 28.3
Balconies are of sufficient size and depth to accommodate outdoor seating and promote indoor / outdoor living.	Balconies open directly from a habitable room and incorporate a minimum dimension of 2m.
PO 28.4	DTS/DPF 28.4
Dwellings are provided with sufficient space for storage to meet likely occupant needs.	Dwellings (not including student accommodation or serviced apartments) are provided with storage at the following rates with at least 50% or more of the storage volume to be provided within the dwelling:
	 (a) studio: not less than 6m³ (b) 1 bedroom dwelling / apartment: not less than 8m³ (c) 2 bedroom dwelling / apartment: not less than 10m³ (d) 3+ bedroom dwelling / apartment: not less than 12m³.
PO 28.5	DTS/DPF 28.5
Dwellings that use light wells for access to daylight, outlook and	Light wells:

Page 78 of 140 Printed on 16/12/2021

ventilation for habitable rooms, are designed to ensure a reasonable living amenity is provided.	(a) are not used as the primary source of outlook for living rooms (b) up to 18m in height have a minimum horizontal dimension of 3m, or 6m if overlooked by bedrooms (c) above 18m in height have a minimum horizontal dimension of 6m, or 9m if overlooked by bedrooms.	
P0 28.6	DTS/DPF 28.6	
Attached or abutting dwellings are designed to minimise the transmission of sound between dwellings and, in particular, to protect bedrooms from possible noise intrusions.	None are applicable.	
PO 28.7	DTS/DPF 28.7	
Dwellings are designed so that internal structural columns correspond with the position of internal walls to ensure that the space within the dwelling/apartment is useable.	None are applicable.	
Dwelling C	onfiguration	
PO 29.1	DTS/DPF 29.1	
Buildings containing in excess of 10 dwellings provide a variety of dwelling sizes and a range in the number of bedrooms per dwelling to contribute to housing diversity.	Buildings containing in excess of 10 dwellings provide at least one of each of the following: (a) studio (where there is no separate bedroom) (b) 1 bedroom dwelling / apartment with a floor area of at least 50m ² (c) 2 bedroom dwelling / apartment with a floor area of at least 65m ² (d) 3+ bedroom dwelling / apartment with a floor area of at least 80m ² , and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom.	
P0 29.2	DTS/DPF 29.2	
Dwellings located on the ground floor of multi-level buildings with 3 or more bedrooms have the windows of their habitable rooms overlooking internal courtyard space or other public space, where possible.	None are applicable.	
Comm	on Areas	
PO 30.1	DTS/DPF 30.1	
The size of lifts, lobbies and corridors is sufficient to accommodate movement of bicycles, strollers, mobility aids and visitor waiting areas.	Common corridor or circulation areas: (a) have a minimum ceiling height of 2.7m (b) provide access to no more than 8 dwellings (c) incorporate a wider section at apartment entries where the corridors exceed 12m in length from a core.	
Group Dwellings, Residential Flat B	uildings and Battle axe Development	
Am	enity	
PO 31.1	DTS/DPF 31.1	
Dwellings are of a suitable size to provide a high standard of amenity for occupants.	Dwellings have a minimum internal floor area in accordance with the following table:	
	Number of bedrooms Minimum internal floor area	

Page 79 of 140 Printed on 16/12/2021

Policy24 - Eliquily		1
	Studio	35m ²
	1 bedroom	50m ²
	2 bedroom	65m ²
	2 Sediooni	03111
	3+ bedrooms	80m ² and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom
PO 31.2	DTS/DPF 31.2	
The orientation and siting of buildings minimises impacts on the amenity, outlook and privacy of occupants and neighbours.	None are applicable.	
PO 31.3	DTS/DPF 31.3	
Development maximises the number of dwellings that face public open space and public streets and limits dwellings oriented towards adjoining properties.		
PO 31.4	DTS/DPF 31.4	
Battle-axe development is appropriately sited and designed to respond to the existing neighbourhood context.	Dwelling sites/allotments are not in the form of a battle-axe arrangement.	
Communal	Open Space	
PO 32.1	DTS/DPF 32.1	
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.	
P0 32.2	DTS/DPF 32.2	
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorpor metres.	ates a minimum dimension of 5
PO 32.3	DTS/DPF 32.3	
Communal open space is designed and sited to:	None are applicable.	
(a) be conveniently accessed by the dwellings which it		
services		
services (b) have regard to acoustic, safety, security and wind	DTS/DPF 32.4	
services (b) have regard to acoustic, safety, security and wind effects. PO 32.4 Communal open space contains landscaping and facilities that	DTS/DPF 32.4 None are applicable.	
services (b) have regard to acoustic, safety, security and wind effects. PO 32.4 Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.	
services (b) have regard to acoustic, safety, security and wind effects. PO 32.4 Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use. PO 32.5	None are applicable. DTS/DPF 32.5	
services (b) have regard to acoustic, safety, security and wind effects. PO 32.4 Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.	
services (b) have regard to acoustic, safety, security and wind effects. PO 32.4 Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use. PO 32.5	None are applicable. DTS/DPF 32.5	

Page 80 of 140 Printed on 16/12/2021

Policy24 - Enquiry	ı	
surveillance.		
Car parking, access	s and manoeuvrability	
P0 33.1	DTS/DPF 33.1	
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on- street parking is retained adjacent the subject site in accordance with the following requirements:	
	 (a) minimum 0.33 on-street car parks per proposed dwelling (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. 	
PO 33.2	DTS/DPF 33.2	
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.	
PO 33.3	DTS/DPF 33.3	
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site: (a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.	
PO 33.4	DTS/DPF 33.4	
Residential driveways that service more than one dwelling or a dwelling on a battle-axe site are designed to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.	
PO 33.5	DTS/DPF 33.5	
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.	
Soft landscaping		
PO 34.1	DTS/DPF 34.1	
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.	
PO 34.2	DTS/DPF 34.2	
Battle-axe or common driveways incorporate landscaping and	Battle-axe or common driveways satisfy (a) and (b):	

Page 81 of 140 Printed on 16/12/2021

permeability to improve appearance and assist in stormwater management.	are constructed of a minimum of 50% permeable or porous material where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Site Facilities /	Waste Storage
PO 35.1	DTS/DPF 35.1
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
PO 35.2	DTS/DPF 35.2
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 35.3	DTS/DPF 35.3
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.
located away, or screened, from public view, and conveniently located in proximity to dwellings and the waste collection point.	
PO 35.4	DTS/DPF 35.4
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 35.5	DTS/DPF 35.5
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.
PO 35.6	DTS/DPF 35.6
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
Water sensitiv	e urban design
PO 36.1	DTS/DPF 36.1
Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
PO 36.2	DTS/DPF 36.2
Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the	None are applicable.

Page 82 of 140 Printed on 16/12/2021

Policy24 - Enquiry		
development does not increase the peak flows in downstream systems.		
Supported Accommodati	on and retirement facilities	
Siting, Configuration and Design		
P0 37.1	DTS/DPF 37.1	
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.	
P0 37.2	DTS/DPF 37.2	
Universal design features are incorporated to provide options for people living with disabilities or limited mobility and / or to facilitate ageing in place.	None are applicable.	
Movement	and Access	
PO 38.1	DTS/DPF 38.1	
Development is designed to support safe and convenient access and movement for residents by providing: (a) ground-level access or lifted access to all units	None are applicable.	
(b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places		
(c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability		
(d) kerb ramps at pedestrian crossing points.		
Communal Open Space		
Communal	Open Space	
PO 39.1	Open Space DTS/DPF 39.1	
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by	DTS/DPF 39.1	
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	DTS/DPF 39.1 None are applicable.	
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation	DTS/DPF 39.1 None are applicable. DTS/DPF 39.2	
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	DTS/DPF 39.1 None are applicable. DTS/DPF 39.2 None are applicable.	
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. PO 39.3 Communal open space is of sufficient size and dimensions to	DTS/DPF 39.1 None are applicable. DTS/DPF 39.2 None are applicable. DTS/DPF 39.3 Communal open space incorporates a minimum dimension of 5	
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. PO 39.3 Communal open space is of sufficient size and dimensions to cater for group recreation.	DTS/DPF 39.1 None are applicable. DTS/DPF 39.2 None are applicable. DTS/DPF 39.3 Communal open space incorporates a minimum dimension of 5 metres.	
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. PO 39.3 Communal open space is of sufficient size and dimensions to cater for group recreation.	DTS/DPF 39.1 None are applicable. DTS/DPF 39.2 None are applicable. DTS/DPF 39.3 Communal open space incorporates a minimum dimension of 5 metres. DTS/DPF 39.4	
PO 39.1 Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. PO 39.3 Communal open space is of sufficient size and dimensions to cater for group recreation. PO 39.4 Communal open space is designed and sited to: (a) be conveniently accessed by the dwellings which it	DTS/DPF 39.1 None are applicable. DTS/DPF 39.2 None are applicable. DTS/DPF 39.3 Communal open space incorporates a minimum dimension of 5 metres. DTS/DPF 39.4	
Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors. PO 39.2 Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents. PO 39.3 Communal open space is of sufficient size and dimensions to cater for group recreation. PO 39.4 Communal open space is designed and sited to: (a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind	DTS/DPF 39.1 None are applicable. DTS/DPF 39.2 None are applicable. DTS/DPF 39.3 Communal open space incorporates a minimum dimension of 5 metres. DTS/DPF 39.4	

Page 83 of 140 Printed on 16/12/2021

	<u> </u>	
PO 39.6	DTS/DPF 39.6	
Communal open space is designed and sited to:	None are applicable.	
 (a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings (b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance. 		
Site Facilities /	Waste Storage	
PO 40.1	DTS/DPF 40.1	
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles.	None are applicable.	
PO 40.2	DTS/DPF 40.2	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.	
PO 40.3	DTS/DPF 40.3	
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 40.4	DTS/DPF 40.4	
Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	None are applicable.	
PO 40.5	DTS/DPF 40.5	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.	
PO 40.6	DTS/DPF 40.6	
Provision is made for on-site waste collection where 10 or more bins are to be collected at any one time.	None are applicable.	
PO 40.7	DTS/DPF 40.7	
Services, including gas and water meters, are conveniently located and screened from public view.	None are applicable.	
Student Accommodation		
PO 41.1	DTS/DPF 41.1	
Student accommodation is designed to provide safe, secure, attractive, convenient and comfortable living conditions for residents, including an internal layout and facilities that are designed to provide sufficient space and amenity for the requirements of student life and promote social interaction.	(a) a range of living options to meet a variety of accommodation needs, such as one-bedroom, two-bedroom and disability access units (b) common or shared facilities to enable a more efficient use of space, including: (i) shared cooking, laundry and external drying	

Page 84 of 140 Printed on 16/12/2021

	facilities	
	facilities (ii) internal and external communal and private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space	
	(iii) common storage facilities at the rate of 8m ³ for every 2 dwellings or students	
	(iv) common on-site parking in accordance with Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas	
	(v) bicycle parking at the rate of one space for every 2 students.	
PO 41.2	DTS/DPF 41.2	
Student accommodation is designed to provide easy adaptation of the building to accommodate an alternative use of the building in the event it is no longer required for student housing.	None are applicable.	
All non-residen	tial development	
Water Sens	sitive Design	
PO 42.1	DTS/DPF 42.1	
Development likely to result in risk of export of sediment, suspended solids, organic matter, nutrients, oil and grease include stormwater management systems designed to minimise pollutants entering stormwater.	None are applicable.	
PO 42.2	DTS/DPF 42.2	
Water discharged from a development site is of a physical, chemical and biological condition equivalent to or better than its pre-developed state.		
PO 42.3	DTS/DPF 42.3	
Development includes stormwater management systems to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that development does not increase peak flows in downstream systems.	nage the rate and duration of n the site to ensure that development	
Wash-down and Waste	Loading and Unloading	
PO 43.1	DTS/DPF 43.1	
Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are:	None are applicable.	
(a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off		
(b) paved with an impervious material to facilitate wastewater collection		
(c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area		
(d) are designed to drain wastewater to either: (i) a treatment device such as a sediment trap and		

Page 85 of 140 Printed on 16/12/2021

coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or

(ii) a holding tank and its subsequent removal offsite on a regular basis.

Laneway Development

Infrastructure and Access

PO 44.1

Development with a primary street comprising a laneway, alley, lane, right of way or similar minor thoroughfare only occurs where:

- (a) existing utility infrastructure and services are capable of accommodating the development
- (b) the primary street can support access by emergency and regular service vehicles (such as waste collection)
- (c) it does not require the provision or upgrading of infrastructure on public land (such as footpaths and stormwater management systems)
- (d) safety of pedestrians or vehicle movement is maintained
- (e) any necessary grade transition is accommodated within the site of the development to support an appropriate development intensity and orderly development of land fronting minor thoroughfares.

DTS/DPF 44.1

Development with a primary street frontage that is not an alley, lane, right of way or similar public thoroughfare.

Table 1 - Private Open Space

Dwelling Type	Dwelling / Site Configuration	Minimum Rate
Dwelling (at ground level, other than a residential flat building that includes above ground dwellings)		Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Cabin or caravan (permanently fixed to the ground) in a residential park or caravan and tourist park		Total area: 16m ² , which may be uses as second car parking space, provided on each site intended for residential occupation.
Dwelling in a residential flat building or mixed use building which	Dwellings at ground level:	15m ² / minimum dimension 3m
incorporate above ground level dwellings	Dwellings above ground level:	
	Studio (no separate bedroom)	4m ² / minimum dimension 1.8m

Page 86 of 140 Printed on 16/12/2021

One bedroom dwelling	8m² / minimum dimension 2.1m
Two bedroom dwelling	11m ² / minimum dimension 2.4m
Three + bedroom dwelling	15 m ² / minimum dimension 2.6m

Forestry

Assessment Provisions (AP)

	Desired Outcome
DO 1	Commercial forestry is designed and sited to maximise economic benefits whilst managing potential negative impacts on the environment, transport networks, surrounding land uses and landscapes.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	utcome Deemed-to-Satisfy Criteria / Designated Performance Feature	
Si	ing	
P0 1.1	DTS/DPF 1.1	
Commercial forestry plantations are established where there is no detrimental effect on the physical environment or scenic quality of the rural landscape.	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Commercial forestry plantations are established on slopes that are stable to minimise the risk of soil erosion.	Commercial forestry plantations are not located on land with a slope exceeding 20% (1-in-5).	
PO 1.3	DTS/DPF 1.3	
Commercial forestry plantations and operations associated with their establishment, management and harvesting are appropriately set back from any sensitive receiver to minimise fire risk and noise disturbance.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from any sensitive receiver.	
PO 1.4	DTS/DPF 1.4	
Commercial forestry plantations are separated from reserves gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> to minimise fire risk and potential for weed infestation.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from a reserve gazetted under the <i>National Parks</i> and <i>Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> .	
Water P	rotection	
P0 2.1	DTS/DPF 2.1	

Page 87 of 140 Printed on 16/12/2021

- Charles - Char	
Commercial forestry plantations incorporate artificial drainage lines (i.e. culverts, runoffs and constructed drains) integrated with natural drainage lines to minimise concentrated water flows onto or from plantation areas.	None are applicable.
PO 2.2	DTS/DPF 2.2
Appropriate siting, layout and design measures are adopted to minimise the impact of commercial forestry plantations on surface water resources.	Commercial forestry plantations: (a) do not involve cultivation (excluding spot cultivation) in drainage lines (b) are set back 20m or more from the banks of any major watercourse (a third order or higher watercourse), lake, reservoir, wetland or sinkhole (with direct connection to
	an aquifer) (c) are set back 10m or more from the banks of any first or second order watercourse or sinkhole (with no direct connection to an aquifer).
Fire Mai	nagement
PO 3.1	DTS/DPF 3.1
Commercial forestry plantations incorporate appropriate firebreaks and fire management design elements.	Commercial forestry plantations provide: (a) 7m or more wide external boundary firebreaks for plantations of 40ha or less
	 (b) 10m or more wide external boundary firebreaks for plantations of between 40ha and 100ha (c) 20m or more wide external boundary firebreaks, or 10m with an additional 10m or more of fuel-reduced plantation, for plantations of 100ha or greater.
P0 3.2	DTS/DPF 3.2
Commercial forestry plantations incorporate appropriate fire management access tracks.	Commercial forestry plantation fire management access tracks:
	(a) are incorporated within all firebreaks (b) are 7m or more wide with a vertical clearance of 4m or more
	(c) are aligned to provide straight through access at junctions, or if they are a no through access track are appropriately signposted and provide suitable turnaround areas for fire-fighting vehicles
	(d) partition the plantation into units of 40ha or less in area.
	Clearances
PO 4.1	DTS/DPF 4.1
Commercial forestry plantations achieve and maintain appropriate clearances from aboveground powerlines.	Commercial forestry plantations incorporating trees with an expected mature height of greater than 6m meet the clearance requirements listed in the following table:
	Voltage of transmission line Tower or Pole Minimum horizontal clearance distance between plantings and transmission lines
	500 kV Tower 38m

Page 88 of 140 Printed on 16/12/2021

275 kV	Tower	25m
132 kV	Tower	30m
132 kV	Pole	20m
66 kV	Pole	20m
Less than 66 kV	Pole	20m

Housing Renewal

Assessment Provisions (AP)

	Desired Outcome
DO 1	Renewed residential environments replace older social housing and provide new social housing infrastructure and other housing options and tenures to enhance the residential amenity of the local area.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
PO 1.1 Residential development provides a range of housing choices.	DTS/DPF 1.1 Development comprises one or more of the following: (a) detached dwellings (b) semi-detached dwellings (c) row dwellings (d) group dwellings (e) residential flat buildings.	
PO 1.2 Medium-density housing options or higher are located in close proximity to public transit, open space and/or activity centres.	None are applicable.	
PO 2.1 Buildings generally do not exceed 3 building levels unless in locations close to public transport, centres and/or open space.	DTS/DPF 2.1 Building height (excluding garages, carports and outbuildings) does not exceed 3 building levels and 12m and wall height does not exceed 9m (not including a gable end).	

Page 89 of 140 Printed on 16/12/2021

PO 2.2 DTS/DPF 2.2 Medium or high rise residential flat buildings located within or at None are applicable. the interface with zones which restrict heights to a maximum of 2 building levels transition down in scale and height towards the boundary of that zone, other than where it is a street boundary. Primary Street Setback PO 3.1 DTS/DPF 3.1 Buildings are set back from the primary street boundary to Buildings are no closer to the primary street (excluding any contribute to an attractive streetscape character. balcony, verandah, porch, awning or similar structure) than 3m. Secondary Street Setback PO 4.1 DTS/DPF 4.1 Buildings are set back from secondary street boundaries to Buildings are set back at least 900mm from the boundary of the maintain separation between building walls and public streets allotment with a secondary street frontage. and contribute to a suburban streetscape character. **Boundary Walls** PO 5.1 DTS/DPF 5.1 Boundary walls are limited in height and length to manage visual Except where the dwelling is located on a central site within a impacts and access to natural light and ventilation. row dwelling or terrace arrangement, dwellings with side boundary walls are sited on only one side boundary and satisfy (a) or (b): (a) adjoin or abut a boundary wall of a building on adjoining land for the same length and height (b) do not: (i) exceed 3.2m in height from the lower of the natural or finished ground level (ii) exceed 11.5m in length (iii) when combined with other walls on the boundary of the subject development site, a maximum 45% of the length of the boundary (iv) encroach within 3 metres of any other existing or proposed boundary walls on the subject land. PO 5.2 DTS/DPF 5.2 Dwellings in a semi-detached, row or terrace arrangement Dwellings in a semi-detached or row arrangement are set back maintain space between buildings consistent with a suburban 900mm or more from side boundaries shared with allotments streetscape character. outside the development site, except for a carport or garage. Side Boundary Setback PO 6.1 DTS/DPF 6.1 Buildings are set back from side boundaries to provide: Other than walls located on a side boundary, buildings are set back from side boundaries: separation between dwellings in a way that contributes (a) to a suburban character (a) at least 900mm where the wall height is up to 3m (b) access to natural light and ventilation for neighbours. (b) other than for a wall facing a southern side boundary, at

Page 90 of 140 Printed on 16/12/2021

(c)

least 900mm plus 1/3 of the wall height above 3m

walls facing a southern side boundary.

at least 1.9m plus 1/3 of the wall height above 3m for

Poor Pound	lary Sathack	
Rear Boundary Setback PO 7.1 DTS/DPF 7.1		
Buildings are set back from rear boundaries to provide:	Dwellings are set back from the rear boundary:	
 (a) separation between dwellings in a way that contributes to a suburban character (b) access to natural light and ventilation for neighbours (c) private open space (d) space for landscaping and vegetation. 	(a) 3m or more for the first building level (b) 5m or more for any subsequent building level.	
Buildings ele	vation design	
PO 8.1	DTS/DPF 8.1	
Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and common driveway areas.	Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway:	
PO 8.2 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	 (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building elevation (c) a balcony projects from the building elevation (d) a verandah projects at least 1m from the building elevation (e) eaves of a minimum 400mm width extend along the width of the front elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm. (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish. DTS/DPF 8.2 Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street 	
PO 8.3	DTS/DPF 8.3	
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable.	
PO 8.4	DTS/DPF 8.4	
Built form considers local context and provides a quality design response through scale, massing, materials, colours and architectural expression.	None are applicable.	
PO 8.5	DTS/DPF 8.5	

Page 91 of 140 Printed on 16/12/2021

Entrances to multi-storey buildings are: None are applicable. (a) oriented towards the street (b) visible and easily identifiable from the street (c) designed to include a common mail box structure. Outlook and amenity PO 9.1 DTS/DPF 9.1 Living rooms have an external outlook to provide a high standard A living room of a dwelling incorporates a window with an external outlook towards the street frontage or private open of amenity for occupants. space. PO 9.2 DTS/DPF 9.2 Bedrooms are separated or shielded from active communal None are applicable. recreation areas, common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion. Private Open Space PO 10.1 DTS/DPF 10.1 Dwellings are provided with suitable sized areas of usable private Private open space is provided in accordance with the following open space to meet the needs of occupants. table: **Dwelling Type Dwelling / Site Minimum Rate** Configuration Dwelling (at Total area: 24m² ground level) located behind the building line Minimum adjacent to a living room: 16m² with a minimum dimension 3m Dwelling (above 4m² / minimum Studio ground level) dimension 1.8m 8m² / minimum One bedroom dimension 2.1m dwelling 11m² / minimum Two bedroom dimension 2.4m dwelling 15 m² / minimum Three + bedroom dimension 2.6m dwelling PO 10.2 DTS/DPF 10.2 Private open space positioned to provide convenient access At least 50% of the required area of private open space is from internal living areas. accessible from a habitable room.

Page 92 of 140 Printed on 16/12/2021

PO 10.3

Private open space is positioned and designed to:

- (a) provide useable outdoor space that suits the needs of occupants;
- (b) take advantage of desirable orientation and vistas; and
- (c) adequately define public and private space.

DTS/DPF 10.3

None are applicable.

Visual privacy

PO 11.1

Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.

DTS/DPF 11.1

Upper level windows facing side or rear boundaries shared with another residential allotment/site satisfy one of the following:

- (a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm
- (b) have sill heights greater than or equal to 1.5m above finished floor level
- (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5m above the finished floor.

PO 11.2

Development mitigates direct overlooking from upper level balconies and terraces to habitable rooms and private open space of adjoining residential uses.

DTS/DPF 11.2

One of the following is satisfied:

(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace

or

- (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:
 - 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land

or

(ii) 1.7m above finished floor level in all other cases

Landscaping

PO 12.1

Soft landscaping is incorporated into development to:

- (a) minimise heat absorption and reflection
- (b) maximise shade and shelter
- (c) maximise stormwater infiltration and biodiversity
- (d) enhance the appearance of land and streetscapes.

DTS/DPF 12.1

Residential development incorporates pervious areas for soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b):

(a) a total area as determined by the following table:

flat building or group dwelling(s), average site	Minimum percentage of site
<150	10%

Page 93 of 140 Printed on 16/12/2021

<200 15%
200-450 20%
(b) at least 30% of land between the road boundary and the
(b) at least 30% of land between the road boundary and the building line.
sitive Design
DTS/DPF 13.1
None are applicable.
Parking
DTS/DPF 14.1
On-site car parking is provided at the following rates per dwelling: (a) 2 or fewer bedrooms - 1 car parking space (b) 3 or more bedrooms - 2 car parking spaces.
DTS/DPF 14.2
Residential parking spaces enclosed by fencing, walls or other obstructions with the following internal dimensions (separate from any waste storage area): (a) single parking spaces: (i) a minimum length of 5.4m (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.5m (iii) minimum garage door width of 2.4m per space.
DTS/DPF 14.3
Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.
DTS/DPF 14.4
Visitor car parking for group and residential flat buildings incorporating 4 or more dwellings is provided on-site at a minimum ratio of 0.25 car parking spaces per dwelling.

Page 94 of 140 Printed on 16/12/2021

Policy24 - Enquiry			
P0 14.5	DTS/DPF 14.5		
Residential flat buildings provide dedicated areas for bicycle parking.	Residential flat buildings provide one bicycle parking space per dwelling.		
Overshadowing			
PO 15.1	DTS/DPF 15.1		
Development minimises overshadowing of the private open spaces of adjoining land by ensuring that ground level open space associated with residential buildings receive direct sunlight for a minimum of 2 hours between 9am and 3pm on 21 June.	None are applicable.		
Wa	aste		
PO 16.1	DTS/DPF 16.1		
Provision is made for the convenient storage of waste bins in a location screened from public view.	A waste bin storage area is provided behind the primary building line that:		
	 (a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space).; and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bir storage area and the street. 		
PO 16.2	DTS/DPF 16.2		
Residential flat buildings provide a dedicated area for the on-site storage of waste which is:	None are applicable.		
 (a) easily and safely accessible for residents and for collection vehicles (b) screened from adjoining land and public roads (c) of sufficient dimensions to be able to accommodate the waste storage needs of the development considering the intensity and nature of the development and the frequency of collection. 			
Vehicle	Access		
PO 17.1	DTS/DPF 17.1		
Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages and on-street parking.	None are applicable.		
P0 17.2	DTS/DPF 17.2		
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless		

Page 95 of 140 Printed on 16/12/2021

	(ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
PO 17.3	DTS/DPF 17.3
Driveways are designed to enable safe and convenient vehicle	Driveways are designed and sited so that:
movements from the public road to on-site parking spaces.	 (a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not more than 1-in-4 on average (b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. (c) if located so as to provide access from an alley, lane or right of way - the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site.
PO 17.4	DTS/DPF 17.4
Driveways and access points are designed and distributed to optimise the provision of on-street parking.	Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following requirements: 1. minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) 2. Minimum car park length of 5.4m where a vehicle can enter or exit a space directly 3. minimum car park length of 6m for an intermediate space located between two other parking spaces.
PO 17.5	DTS/DPF 17.5
Residential driveways that service more than one dwelling of a dimension to allow safe and convenient movement.	Where on-street parking is available abutting the site's street frontage, on-street parking is retained in accordance with the following requirements: (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 17.6	DTS/DPF 17.6
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre
PO 17.7	DTS/DPF 17.7
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area

Page 96 of 140 Printed on 16/12/2021

	designated for the movement and manoeuvring of vehicles.	
Sto	rage	
PO 18.1	DTS/DPF 18.1	
Dwellings are provided with sufficient and accessible space for storage to meet likely occupant needs.	Dwellings are provided with storage at the following rates ar 50% or more of the storage volume is provided within the dwelling:	
	 (a) studio: not less than 6m³ (b) 1 bedroom dwelling / apartment: not less than 8m³ (c) 2 bedroom dwelling / apartment: not less than 10m³ (d) 3+ bedroom dwelling / apartment: not less than 12m³. 	
Earth	works	
PO 19.1	DTS/DPF 19.1	
Development, including any associated driveways and access	The development does not involve:	
tracks, minimises the need for earthworks to limit disturbance to natural topography.	(a) excavation exceeding a vertical height of 1m or	
	(b) filling exceeding a vertical height of 1m or	
	(c) a total combined excavation and filling vertical height exceeding 2m.	
Service connection	I s and infrastructure	
PO 20.1	DTS/DPF 20.1	
Dwellings are provided with appropriate service connections and infrastructure.	The site and building:	
	(a) have the ability to be connected to a permanent potable water supply	
	(b) have the ability to be connected to a sewerage system, or a wastewater system approved under the South Australian Public Health Act 2011	
	(c) have the ability to be connected to electricity supply	
	(d) have the ability to be connected to an adequate water supply (and pressure) for fire-fighting purposes	
	(e) would not be contrary to the Regulations prescribed for the purposes of Section 86 of the <i>Electricity Act 1996</i> .	
Site cont	I amination	
PO 21.1	DTS/DPF 21.1	
Land that is suitable for sensitive land uses to provide a safe environment.	Development satisfies (a), (b), (c) or (d):	
	(a) does not involve a change in the use of land	
	(b) involves a change in the use of land that does not constitute a change to a <u>more sensitive use</u>	
	(c) involves a change in the use of land to a <u>more sensitive</u> <u>use</u> on land at which <u>site contamination</u> does not exist (as demonstrated in a <u>site contamination declaration</u> <u>form</u>)	
	(d) involves a change in the use of land to a <u>more sensitive</u> <u>use</u> on land at which <u>site contamination</u> exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: (i) <u>a site contamination audit report</u> has been	

Page 97 of 140 Printed on 16/12/2021

prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that site contamination does not exist (or no longer exists) at the land B. the land is suitable for the proposed use or range of uses (without the need for any further remediation) C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development) and no other <u>class 1 activity</u> or <u>class 2 activity</u> has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

	Desired Outcome
DO 1	Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
	General
P0 1.1	DTS/DPF 1.1
Development is located and designed to minimise hazard or nuisance to adjacent development and land uses.	None are applicable.
Visual Amenity	
PO 2.1	DTS/DPF 2.1

Page 98 of 140 Printed on 16/12/2021

network transmi (excludi ancillary scenic reference) (a) (b) (c) (d) (e) (f)	ual impact of above-ground infrastructure (s and services (excluding high voltage ission lines), renewable energy facilities ing wind farms), energy storage facilities and y development is minimised from townships, routes and public roads by: utilising features of the natural landscape to obscure views where practicable siting development below ridgelines where practicable avoiding visually sensitive and significant landscapes using materials and finishes with low-reflectivity and colours that complement the surroundings using existing vegetation to screen buildings incorporating landscaping or landscaped mounding around the perimeter of a site and between adjacent allotments accommodating or zoned to primarily accommodate sensitive receivers.	DTS/DPF 2.2 None are applicable.
PO 2.3		DTS/DPF 2.3
installat substat	es exposed by earthworks associated with the tion of storage facilities, pipework, penstock, tions and other ancillary plant are reinstated and tated to reduce adverse visual impacts on tatel tand.	None are applicable.
		Rehabilitation
PO 3.1		DTS/DPF 3.1
of distu	ssive rehabilitation (incorporating revegetation) urbed areas, ahead of or upon decommissioning s used for renewable energy facilities and ission corridors.	None are applicable.
		Hazard Management
PO 4.1		DTS/DPF 4.1
ancillar adverse	ucture and renewable energy facilities and y development located and operated to not ely impact maritime or air transport safety, ng the operation of ports, airfields and landing	None are applicable.
PO 4.2		DTS/DPF 4.2
transmi	es for energy generation, power storage and ission are separated as far as practicable from gs, tourist accommodation and frequently	None are applicable.

Page 99 of 140 Printed on 16/12/2021

Policy24 - Eriquity	
visited public places (such as viewing platforms / lookouts) to reduce risks to public safety from fire or equipment malfunction.	
PO 4.3	DTS/DPF 4.3
Bushfire hazard risk is minimised for renewable energy facilities by providing appropriate access tracks, safety equipment and water tanks and establishing cleared areas around substations, battery storage and operations compounds.	None are applicable.
Electricity Infra	structure and Battery Storage Facilities
PO 5.1	DTS/DPF 5.1
Electricity infrastructure is located to minimise visual impacts through techniques including:	None are applicable.
(a) siting utilities and services: (i) on areas already cleared of native vegetation (ii) where there is minimal interference or disturbance to existing native vegetation or biodiversity (b) grouping utility buildings and structures with non-residential development, where practicable.	
PO 5.2	DTS/DPF 5.2
Electricity supply (excluding transmission lines) serving new development in urban areas and townships installed underground, excluding lines having a capacity exceeding or equal to 33kV.	None are applicable.
PO 5.3	DTS/DPF 5.3
Battery storage facilities are co-located with substation infrastructure where practicable to minimise the development footprint and reduce environmental impacts.	None are applicable.
Te	lecommunication Facilities
PO 6.1	DTS/DPF 6.1
The proliferation of telecommunications facilities in the form of towers/monopoles in any one locality is managed, where technically feasible, by co-locating a facility with other communications facilities to mitigate impacts from clutter on visual amenity.	None are applicable.
PO 6.2	DTS/DPF 6.2
Telecommunications antennae are located as close as practicable to support structures to manage overall bulk and mitigate impacts on visual amenity.	None are applicable.
PO 6.3	DTS/DPF 6.3

Page 100 of 140 Printed on 16/12/2021

Telecommunications facilities, particularly None are applicable. towers/monopoles, are located and sized to mitigate visual impacts by the following methods: (a) where technically feasible, incorporating the facility within an existing structure that may serve another purpose or all of the following: (b) using existing buildings and landscape features to obscure or interrupt views of a facility from nearby public roads, residential areas and places of high public amenity to the extent practical without unduly hindering the effective provision of telecommunications services (c) using materials and finishes that complement the environment (d) screening using landscaping and vegetation, particularly for equipment shelters and huts. Renewable Energy Facilities PO 7.1 DTS/DPF 7.1 Renewable energy facilities are located as close as None are applicable. practicable to existing transmission infrastructure to facilitate connections and minimise environmental impacts as a result of extending transmission infrastructure. Renewable Energy Facilities (Wind Farm) PO 8.1 DTS/DPF 8.1 Visual impact of wind turbine generators on the amenity Wind turbine generators are: of residential and tourist development is reduced set back at least 2000m from the base of a turbine to any of the through appropriate separation. following zones: Rural Settlement Zone (ii) Township Zone (iii) Rural Living Zone Rural Neighbourhood Zone with an additional 10m setback per additional metre over 150m overall turbine height (measured from the base of the turbine). (b) set back at least 1500m from the base of the turbine to nonassociated (non-stakeholder) dwellings and tourist accommodation PO 8.2 DTS/DPF 8.2 The visual impact of wind turbine generators on natural None are applicable. landscapes is managed by: (a) designing wind turbine generators to be uniform in colour, size and shape (b) coordinating blade rotation and direction (c) mounting wind turbine generators on tubular towers as opposed to lattice towers. PO 8.3 DTS/DPF 8.3

Page 101 of 140 Printed on 16/12/2021

Policy24 - Enquiry	Policy24 - Enquiry				
Wind turbine generators and ancillary development minimise potential for bird and bat strike.	None are applicable.				
PO 8.4 Wind turbine generators incorporate recognition systems or physical markers to minimise the risk to aircraft operations.	DTS/DPF 8.4 No Commonwealth air safety (CASA / ASA) or Defence requirement is applicable.				
PO 8.5	DTS/DPF 8.5				
Meteorological masts and guidewires are identifiable to aircraft through the use of colour bands, marker balls, high visibility sleeves or flashing strobes.	None are applica	None are applicable.			
Renewab	le Energy Facilities (S	Solar Power)			
PO 9.1	DTS/DPF 9.1				
Ground mounted solar power facilities generating 5MW or more are not located on land requiring the clearance of areas of intact native vegetation or on land of high environmental, scenic or cultural value.	None are applica	able.			
PO 9.2	DTS/DPF 9.2				
Ground mounted solar power facilities allow for movement of wildlife by:	None are applicable.				
 incorporating wildlife corridors and habitat refuges avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility. 					
PO 9.3	DTS/DPF 9.3				
Amenity impacts of solar power facilities are minimised through separation from conservation areas and sensitive receivers in other ownership.	Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following criteria:				
	Generation Capacity	Approximate size of array	Setback from adjoining land boundary	Setback from conservation areas	Setback from Township, Rural Settlement, Rural Neighbourhood and Rural Living Zones ¹
	50MW>	80ha+	30m	500m	2km
	10MW<50MW	16ha-<80ha	25m	500m	1.5km

Page 102 of 140 Printed on 16/12/2021

5MW<10MW

8ha to <16ha

20m

500m

1km

	1MW<5MW	1.6ha to <8ha	15m	500m	500m
	100kW<1MW	0.5ha<1.6ha	10m	500m	100m
	<100kW	<0.5ha	5m	500m	25m
	Notes:				
	1. Does not app power facility is	-		=	mounted solar
PO 9.4	DTS/DPF 9.4				
Ground mounted solar power facilities incorporate landscaping within setbacks from adjacent road frontages and boundaries of adjacent allotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.	None are applic	able.			
Hydropow	er / Pumped Hydropo	ower Facilities			
PO 10.1	DTS/DPF 10.1				
Hydropower / pumped hydropower facility storage is designed and operated to minimise the risk of storage dam failure.	None are applicable.				
PO 10.2	DTS/DPF 10.2				
Hydropower / pumped hydropower facility storage is designed and operated to minimise water loss through increased evaporation or system leakage, with the incorporation of appropriate liners, dam covers, operational measures or detection systems.	None are applicable.				
PO 10.3	DTS/DPF 10.3				
Hydropower / pumped hydropower facilities on existing or former mine sites minimise environmental impacts from site contamination, including from mine operations or water sources subject to such processes, now or in the future.					
	Water Supply				
P0 11.1	DTS/DPF 11.1				
Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	Development is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the on-going requirements of the development.				
PO 11.2	DTS/DPF 11.2				
Dwellings are connected to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the intended use. Where this is not available an appropriate rainwater tank or storage system for domestic use is provided.	A dwelling is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the requirement of the development. Where this is not available it is serviced by a rainwate tank or tanks capable of holding at least 50,000 litres of water which is:			the requirements ced by a rainwater	
	(a) exclusi	vely for domest	ic use		

Page 103 of 140 Printed on 16/12/2021

		(b)	connected to the roof drainage system of the dwelling.
		Wastewa	ater Services
PO 12.1		DTS/DPF	- 12.1
wastev the req availab meet tl	pment is connected to an approved common vater disposal service with the capacity to meet uirements of the intended use. Where this is not ble an appropriate on-site service is provided to the ongoing requirements of the intended use in ance with the following: it is wholly located and contained within the allotment of the development it will service in areas where there is a high risk of contamination of surface, ground, or marine water resources from on-site disposal of liquid wastes, disposal systems are included to minimise the risk of pollution to those water resources septic tank effluent drainage fields and other wastewater disposal areas are located away from watercourses and flood prone, sloping, saline or poorly drained land to minimise environmental harm.	wastev of the o being s	pment is connected, or will be connected, to an approved common vater disposal service with the capacity to meet the requirements development. Where this is not available it is instead capable of serviced by an on-site waste water treatment system in accordance e following: the system is wholly located and contained within the allotment of development it will service; and the system will comply with the requirements of the South Australian Public Health Act 2011.
PO 12.2		DTS/DPF	F 12.2
Effluent drainage fields and other wastewater disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.			pment is not built on, or encroaches within, an area that is, or will be d for a sewerage system or waste control system.
		Tempor	ary Facilities
PO 13.1		DTS/DPF	- 13.1
to gene constru provisi	and remote locations, development that is likely erate significant waste material during uction, including packaging waste, makes on for a temporary on-site waste storage ure to minimise the incidence of wind-blown		e collection and disposal service is used to dispose of the volume te at the rate it is generated.
PO 13.2		DTS/DPF	F 13.2
renewa concre roads a	orary facilities to support the establishment of able energy facilities (including borrow pits, te batching plants, laydown, storage, access and worker amenity areas) are sited and ed to minimise environmental impact.	None a	re applicable.

Intensive Animal Husbandry and Dairies

Assessment Provisions (AP)

Page 104 of 140 Printed on 16/12/2021

Desired Outcome

DO 1

Development of intensive animal husbandry and dairies in locations that are protected from encroachment by sensitive receivers and in a manner that minimises their adverse effects on amenity and the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Siting a	nd Design	
PO 1.1	DTS/DPF 1.1	
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to not unreasonably impact on the environment or amenity of the locality.	None are applicable.	
P0 1.2	DTS/DPF 1.2	
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to prevent the potential transmission of disease to other operations where animals are kept.	None are applicable.	
P0 1.3	DTS/DPF 1.3	
Intensive animal husbandry and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	None are applicable.	
PO 1.4	DTS/DPF 1.4	
Dairies and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	Dairies, associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities are located 500m or more from the nearest sensitive receiver in other ownership.	
PO 1.5	DTS/DPF 1.5	
Lagoons for the storage or treatment of milking shed effluent is adequately separated from roads to minimise impacts from odour on the general public.	Lagoons for the storage or treatment of milking shed effluent are set back 20m or more from public roads.	
W	aste	
PO 2.1	DTS/DPF 2.1	
Storage of manure, used litter and other wastes (other than waste water lagoons) is sited, designed, constructed and managed to:	None are applicable.	
(a) avoid attracting and harbouring vermin (b) avoid polluting water resources		

Page 105 of 140 Printed on 16/12/2021

(c) be located outside 1% AEP flood event areas.	
Soil and Wat	er Protection
PO 3.1	DTS/DPF 3.1
To avoid environmental harm and adverse effects on water resources, intensive animal husbandry operations are appropriately set back from: (a) public water supply reservoirs (b) major watercourses (third order or higher stream) (c) any other watercourse, bore or well used for domestic or stock water supplies.	(a) 800m or more from a public water supply reservoir (b) 200m or more from a major watercourse (third order or higher stream) (c) 100m or more from any other watercourse, bore or well used for domestic or stock water supplies.
PO 3.2	DTS/DPF 3.2
Intensive animal husbandry operations and dairies incorporate appropriately designed effluent and run-off facilities that: (a) have sufficient capacity to hold effluent and runoff from the operations on site (b) ensure effluent does not infiltrate and pollute groundwater, soil or other water resources.	None are applicable.

Interface between Land Uses

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
General Land U	se Compatibility
PO 1.1 Sensitive receivers are designed and sited to protect residents and occupants from adverse impacts generated by lawfully existing land uses (or lawfully approved land uses) and land uses desired in the zone.	DTS/DPF 1.1 None are applicable.
PO 1.2 Development adjacent to a site containing a sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended	DTS/DPF 1.2 None are applicable.

Page 106 of 140 Printed on 16/12/2021

to accommodate sensitive receivers is designed to minimise adverse impacts.

Hours of Operation

PO 2.1

Non-residential development does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) or an adjacent zone primarily for sensitive receivers through its hours of operation having regard to:

- (a) the nature of the development
- (b) measures to mitigate off-site impacts
- (c) the extent to which the development is desired in the
- (d) measures that might be taken in an adjacent zone primarily for sensitive receivers that mitigate adverse impacts without unreasonably compromising the intended use of that land.

DTS/DPF 2.1

Development operating within the following hours:

Class of	Development	Hours of operation
Consulting room		7am to 9pm, Monday to Friday 8am to 5pm, Saturday
Office		7am to 9pm, Monday to Friday 8am to 5pm, Saturday
Shop, other than any one or combination of the following:		7am to 9pm, Monday to Friday 8am to 5pm, Saturday and Sunday
(b) c tl R L Z Z	estaurant sellar door in he Productive Rural andscape Zone, Rural Horticulture Zone	

Overshadowing

PO 3.1

Overshadowing of habitable room windows of adjacent residential land uses in:

- a. a neighbourhood-type zone is minimised to maintain access to direct winter sunlight
- b. other zones is managed to enable access to direct winter sunlight.

DTS/DPF 3.1

North-facing windows of habitable rooms of adjacent residential land uses in a neighbourhood-type zone receive at least 3 hours of direct sunlight between 9.00am and 3.00pm on 21 June.

PO 3.2

Overshadowing of the primary area of private open space or communal open space of adjacent residential land uses in:

- a. a neighbourhood type zone is minimised to maintain access to direct winter sunlight
- b. other zones is managed to enable access to direct winter sunlight.

DTS/DPF 3.2

Development maintains 2 hours of direct sunlight between 9.00 am and 3.00 pm on 21 June to adjacent residential land uses in a neighbourhood-type zone in accordance with the following:

- a. for ground level private open space, the smaller of the following:
- i. half the existing ground level open space or
- ii. 35m2 of the existing ground level open space (with at least one of the area's dimensions measuring 2.5m)
- b. for ground level communal open space, at least half of the existing ground level open space.

Page 107 of 140 Printed on 16/12/2021

PO 3.3	DTS/DPF 3.3
Development does not unduly reduce the generating capacity of adjacent rooftop solar energy facilities taking into account:	None are applicable.
 (a) the form of development contemplated in the zone (b) the orientation of the solar energy facilities (c) the extent to which the solar energy facilities are already overshadowed. 	
PO 3.4	DTS/DPF 3.4
Development that incorporates moving parts, including windmills and wind farms, are located and operated to not cause unreasonable nuisance to nearby dwellings and tourist accommodation caused by shadow flicker.	None are applicable.
Activities Generat	ing Noise or Vibration
PO 4.1	DTS/DPF 4.1
Development that emits noise (other than music) does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers).	Noise that affects sensitive receivers achieves the relevant Environment Protection (Noise) Policy criteria.
PO 4.2	DTS/DPF 4.2
vehicles, plant and equipment, outdoor work spaces (and the like) are designed and sited to not unreasonably impact the amenity of adjacent sensitive receivers (or lawfully approved sensitive receivers) and zones primarily intended to accommodate sensitive receivers due to noise and vibration by adopting techniques including:	
 (a) locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers 	
(b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers	
 (c) housing plant and equipment within an enclosed structure or acoustic enclosure 	
(d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone.	
P0 4.3	DTS/DPF 4.3
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers).	The pump and/or filtration system ancillary to a dwelling erected on the same site is: (a) enclosed in a solid acoustic structure located at least 5m from the nearest habitable room located on an adjoining allotment or (b) located at least 12m from the nearest habitable room located on an adjoining allotment.
PO 4.4	DTS/DPF 4.4

Page 108 of 140 Printed on 16/12/2021

External noise into bedrooms is minimised by separating or shielding these rooms from service equipment areas and fixed noise sources located on the same or an adjoining allotment.	Adjacent land is used for	residential purposes.
PO 4.5	DTS/DPF 4.5	
Outdoor areas associated with licensed premises (such as beer gardens or dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.	
PO 4.6	DTS/DPF 4.6	
Development incorporating music achieves suitable acoustic amenity when measured at the boundary of an adjacent sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers.	Development incorporation	ng music includes noise attenuation ve the following noise levels:
	Assessment location	Music noise level
	Externally at the nearest existing or envisaged noise sensitive location	Less than 8dB above the level of background noise (L _{90,15min}) in any octave band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB)
Air C	Quality	
PO 5.1	DTS/DPF 5.1	
Development with the potential to emit harmful or nuisance- generating air pollution incorporates air pollution control measures to prevent harm to human health or unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) within the locality and zones primarily intended to accommodate sensitive receivers.	None are applicable.	
PO 5.2	DTS/DPF 5.2	
Development that includes chimneys or exhaust flues (including cafes, restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by: (a) incorporating appropriate treatment technology before exhaust emissions are released	None are applicable.	
(b) locating and designing chimneys or exhaust flues to maximise the dispersion of exhaust emissions, taking into account the location of sensitive receivers.		
Ligh	nt Spill	
PO 6.1	DTS/DPF 6.1	
External lighting is positioned and designed to not cause unreasonable light spill impact on adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.	
PO 6.2	DTS/DPF 6.2	

Page 109 of 140 Printed on 16/12/2021

PO 7.1 DTS/DPF 7.1 Development is designed and comprised of materials and None are applicable. finishes that do not unreasonably cause a distraction to adjacent road users and pedestrian areas or unreasonably cause heat loading and micro-climatic impacts on adjacent buildings and land uses as a result of reflective solar glare. Electrical Interference PO 8.1 DTS/DPF 8.1 Development in rural and remote areas does not unreasonably The building or structure: diminish or result in the loss of existing communication services (a) is no greater than 10m in height, measured from existing due to electrical interference. ground level (b) is not within a line of sight between a fixed transmitter and fixed receiver (antenna) other than where an alternative service is available via a different fixed transmitter or cable. Interface with Rural Activities DTS/DPF 9.1 PO 9.1 Sensitive receivers are located and designed to mitigate impacts None are applicable. from lawfully existing horticultural and farming activities (or lawfully approved horticultural and farming activities), including spray drift and noise and do not prejudice the continued operation of these activities. PO 9 2 DTS/DPF 9.2 Sensitive receivers are located and designed to mitigate None are applicable. potential impacts from lawfully existing intensive animal husbandry activities and do not prejudice the continued operation of these activities. PO 9.3 DTS/DPF 9.3 Sensitive receivers are located and designed to mitigate Sensitive receivers are located at least 200m from the boundary potential impacts from lawfully existing land-based aquaculture of a site used for land-based aquaculture and associated activities and do not prejudice the continued operation of these components in other ownership. activities. PO 9.4 DTS/DPF 9.4 Sensitive receivers are located and designed to mitigate Sensitive receivers are sited at least 500m from the boundary of potential impacts from lawfully existing dairies including a site used for a dairy and associated wastewater lagoon(s) and associated wastewater lagoons and liquid/solid waste storage liquid/solid waste storage and disposal facilities in other and disposal facilities and do not prejudice the continued ownership. operation of these activities. PO 9.5 DTS/DPF 9.5 Sensitive receivers are located and designed to mitigate the Sensitive receivers are located away from the boundary of a site potential impacts from lawfully existing facilities used for the used for the handling, transportation and/or storage of bulk handling, transportation and storage of bulk commodities commodities in other ownership in accordance with the (recognising the potential for extended hours of operation) and following: do not prejudice the continued operation of these activities. (a) 300m or more, where it involves the handling of

Page 110 of 140 Printed on 16/12/2021

agricultural crop products, rock, ores, minerals,

Policy24 - Enquiry		
	petroleum products or chemicals to or from any commercial storage facility (b) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals) where the handling of these materials into or from vessels does not exceed 100 tonnes per day (c) 500m or more, where it involves the storage of bulk petroleum in individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1000 cubic metres (d) 500m or more, where it involves the handling of coal with a capacity up to 1 tonne per day or a storage capacity up to 50 tonnes (e) 1000m or more, where it involves the handling of coal with a capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes.	
PO 9.6	DTS/DPF 9.6	
Setbacks and vegetation plantings along allotment boundaries should be incorporated to mitigate the potential impacts of spray drift and other impacts associated with agricultural and horticultural activities.	None are applicable.	
PO 9.7	DTS/DPF 9.7	
Urban development does not prejudice existing agricultural and horticultural activities through appropriate separation and design techniques.	None are applicable.	
Interface with Mines and Qua	rries (Rural and Remote Areas)	
PO 10.1	DTS/DPF 10.1	
Sensitive receivers are separated from existing mines to minimise the adverse impacts from noise, dust and vibration.	Sensitive receivers are located no closer than 500m from the boundary of a Mining Production Tenement under the <i>Mining Act</i> 1971.	

Land Division

Assessment Provisions (AP)

Desired Outcome		
DO 1	Land division:	
	(b) allows efficient provision of new inf (c) integrates and allocates adequate a significant vegetation, watercourse (d) facilitates solar access through allo	supports active travel, walkability and the use of public transport

Page 111 of 140 Printed on 16/12/2021

Performance Outcome

Deemed-to-Satisfy Criteria / Designated Performance Feature

All land division

Allotment configuration	
P0 1.1	DTS/DPF 1.1
Land division creates allotments suitable for their intended use.	(a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the Development Act 1993 or Planning, Development and Infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments.
PO 1.2	DTS/DPF 1.2
Land division considers the physical characteristics of the land, preservation of environmental and cultural features of value and the prevailing context of the locality.	None are applicable.
Design a	nd Layout
PO 2.1	DTS/DPF 2.1
Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls.	None are applicable.
P0 2.2	DTS/DPF 2.2
Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones.	None are applicable.
P0 2.3	DTS/DPF 2.3
Land division maximises the number of allotments that face public open space and public streets.	None are applicable.
P0 2.4	DTS/DPF 2.4
Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure.	None are applicable.
PO 2.5	DTS/DPF 2.5
Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services.	None are applicable.
PO 2.6	DTS/DPF 2.6
Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	None are applicable.

Page 112 of 140 Printed on 16/12/2021

DTS/DPF 2.7
None are applicable.
DTS/DPF 2.8
None are applicable.
nd Access
DTS/DPF 3.1
None are applicable.
DTS/DPF 3.2
None are applicable.
DTS/DPF 3.3
None are applicable.
DTS/DPF 3.4
None are applicable.
DTS/DPF 3.5
None are applicable.
DTS/DPF 3.6
None are applicable.
DTS/DPF 3.7
None are applicable.
DTS/DPF 3.8
None are applicable.
DTS/DPF 3.9
None are applicable.
DTS/DPF 3.10
None are applicable.

Page 113 of 140 Printed on 16/12/2021

Policy24 - Eriquiry		
PO 3.11	DTS/DPF 3.11	
Local streets are designed to create low-speed environments that are safe for cyclists and pedestrians.	None are applicable.	
Infras	tructure	
PO 4.1	DTS/DPF 4.1	
Land division incorporates public utility services within road reserves or dedicated easements.	None are applicable.	
PO 4.2	DTS/DPF 4.2	
Waste water, sewage and other effluent is capable of being disposed of from each allotment without risk to public health or the environment.	(a) a waste water treatment plant that has the hydraulic volume and pollutant load treatment and disposal capacity for the maximum predicted wastewater volume generated by subsequent development of the proposed allotment or (b) a form of on-site waste water treatment and disposal that meets relevant public health and environmental standards.	
PO 4.3	DTS/DPF 4.3	
Septic tank effluent drainage fields and other waste water disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is or will be, required for a sewerage system or waste control system.	
PO 4.4	DTS/DPF 4.4	
Constructed wetland systems, including associated detention and retention basins, are sited and designed to ensure public health and safety is protected, including by minimising potential public health risks arising from the breeding of mosquitoes.	None are applicable.	
PO 4.5	DTS/DPF 4.5	
Constructed wetland systems, including associated detention and retention basins, are sited and designed to allow sediments to settle prior to discharge into watercourses or the marine environment.	None are applicable.	
PO 4.6	DTS/DPF 4.6	
Constructed wetland systems, including associated detention and retention basins, are sited and designed to function as a landscape feature.	None are applicable.	
Minor Land Division (Under 20 Allotments)		
Open Space		
PO 5.1	DTS/DPF 5.1	
Land division proposing an additional allotment under 1 hectare provides or supports the provision of open space.	None are applicable.	
Solar Orientation		

Page 114 of 140 Printed on 16/12/2021

Policy24 - Enquiry	
PO 6.1	DTS/DPF 6.1
Land division for residential purposes facilitates solar access through allotment orientation.	None are applicable.
Water Sens	sitive Design
P0 7.1	DTS/DPF 7.1
Land division creating a new road or common driveway includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
PO 7.2	DTS/DPF 7.2
Land division designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
Battle-Axe I	Development
PO 8.1	DTS/DPF 8.1
Battle-axe development appropriately responds to the existing neighbourhood context.	Allotments are not in the form of a battle-axe arrangement.
PO 8.2	DTS/DPF 8.2
Battle-axe development designed to allow safe and convenient movement.	The handle of a battle-axe development:
	(a) has a minimum width of 4m or (b) where more than 3 allotments are proposed, a minimum width of 5.5m.
PO 8.3	DTS/DPF 8.3
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre.
PO 8.4	DTS/DPF 8.4
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater	Battle-axe or common driveways satisfy (a) and (b):
management.	(a) are constructed of a minimum of 50% permeable or porous material
	(b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Major Land Divisio	Don (20+ Allotments)
	Space
PO 9.1	DTS/DPF 9.1
Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration.	None are applicable.
PO 9.2	DTS/DPF 9.2

Page 115 of 140 Printed on 16/12/2021

Policy24 - Enquiry		
Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Land allocated for active recreation has dimensions capable of accommodating a range of active recreational activities.	None are applicable.	
Water Sens	itive Design	
PO 10.1	DTS/DPF 10.1	
Land division creating 20 or more residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
PO 10.2	DTS/DPF 10.2	
Land division creating 20 or more non-residential allotments includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
PO 10.3	DTS/DPF 10.3	
Land division creating 20 or more allotments includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.	
Solar Orientation		
PO 11.1	DTS/DPF 11.1	
Land division creating 20 or more allotments for residential purposes facilitates solar access through allotment orientation and allotment dimensions.	None are applicable.	

Marinas and On-Water Structures

Assessment Provisions (AP)

Desired Outcome	
DO 1	Marinas and on-water structures are located and designed to minimise the impairment of commercial, recreational and navigational activities and adverse impacts on the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 116 of 140 Printed on 16/12/2021

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Navigation	and Safety
PO 1.1	DTS/DPF 1.1
Safe public access is provided or maintained to the waterfront, public infrastructure and recreation areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
The operation of wharves is not impaired by marinas and onwater structures.	None are applicable.
PO 1.3	DTS/DPF 1.3
Navigation and access channels are not impaired by marinas and on-water structures.	None are applicable.
PO 1.4	DTS/DPF 1.4
Commercial shipping lanes are not impaired by marinas and onwater structures.	Marinas and on-water structures are set back 250m or more from commercial shipping lanes.
P0 1.5	DTS/DPF 1.5
Marinas and on-water structures are located to avoid interfering with the operation or function of a water supply pumping station.	On-water structures are set back: (a) 3km or more from upstream water supply pumping station take-off points (b) 500m or more from downstream water supply pumping station take-off points.
PO 1.6	DTS/DPF 1.6
Maintenance of on-water infrastructure, including revetment walls, is not impaired by marinas and on-water structures.	None are applicable.
Environmental Protection	
PO 2.1	DTS/DPF 2.1
Development is sited and designed to facilitate water circulation and exchange.	None are applicable.

Open Space and Recreation

Assessment Provisions (AP)

Desired Outcome	
DO 1	Pleasant, functional and accessible open space and recreation facilities are provided at State, regional, district, neighbourhood and local levels for active and passive recreation, biodiversity, community health, urban cooling, tree

Page 117 of 140 Printed on 16/12/2021

canopy cover, visual amenity, gathering spaces, wildlife and waterway corridors, and a range of other functions and at a range of sizes that reflect the purpose of that open space.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land Use a	and Intensity	
PO 1.1	DTS/DPF 1.1	
Recreation facilities are compatible with surrounding land uses and activities.	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Open space areas include natural or landscaped areas using locally indigenous plant species and large trees.	None are applicable.	
Design :	and Siting	
PO 2.1	DTS/DPF 2.1	
Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Open space and recreation facilities incorporate park furniture, shaded areas and resting places.	None are applicable.	
P0 2.3	DTS/DPF 2.3	
Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities.	None are applicable.	
Pedestrians and Cyclists		
PO 3.1	DTS/DPF 3.1	
Open space incorporates:	None are applicable.	
(a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes;		
(b) safe crossing points where pedestrian routes intersect the road network;		
(c) easily identified access points.		
Usability		
PO 4.1	DTS/DPF 4.1	
Land allocated for open space is suitable for its intended active and passive recreational use taking into consideration its gradient and potential for inundation.	None are applicable.	
Safety ar	nd Security	
PO 5.1	DTS/DPF 5.1	
Open space is overlooked by housing, commercial or other	None are applicable.	

Page 118 of 140 Printed on 16/12/2021

Policy24 - Enquiry	
development to provide casual surveillance where possible.	
PO 5.2	DTS/DPF 5.2
Play equipment is located to maximise opportunities for passive surveillance.	None are applicable.
PO 5.3	DTS/DPF 5.3
Landscaping provided in open space and recreation facilities maximises opportunities for casual surveillance throughout the park.	None are applicable.
PO 5.4	DTS/DPF 5.4
Fenced parks and playgrounds have more than one entrance or exit to minimise potential entrapment.	None are applicable.
PO 5.5	DTS/DPF 5.5
Adequate lighting is provided around toilets, telephones, seating, litter bins, bicycle storage, car parks and other such facilities.	None are applicable.
PO 5.6	DTS/DPF 5.6
Pedestrian and bicycle movement after dark is focused along clearly defined, adequately lit routes with observable entries and exits.	None are applicable.
Sign	nage
PO 6.1	DTS/DPF 6.1
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like.	None are applicable.
Buildings and Structures	
P0 7.1	DTS/DPF 7.1
Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive.	None are applicable.
PO 7.2	DTS/DPF 7.2
Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	None are applicable.
PO 7.3	DTS/DPF 7.3
Development in open space is constructed to minimise the extent of impervious surfaces.	None are applicable.
P0 7.4	DTS/DPF 7.4
Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	None are applicable.
Lands	ccaping
	Τ

Page 119 of 140 Printed on 16/12/2021

P0 8.1	DTS/DPF 8.1
Open space and recreation facilities provide for the planting and retention of large trees and vegetation.	None are applicable.
PO 8.2	DTS/DPF 8.2
Landscaping in open space and recreation facilities provides shade and windbreaks:	None are applicable.
(a) along cyclist and pedestrian routes;(b) around picnic and barbecue areas;(c) in car parking areas.	
PO 8.3	DTS/DPF 8.3
Landscaping in open space facilitates habitat for local fauna and facilitates biodiversity.	None are applicable.
PO 8.4	DTS/DPF 8.4
Landscaping including trees and other vegetation passively watered with local rainfall run-off, where practicable.	None are applicable.

Out of Activity Centre Development

Assessment Provisions (AP)

Desired Outcome The role of Activity Centres in contributing to the form and pattern of development and enabling equitable and convenient access to a range of shopping, administrative, cultural, entertainment and other facilities in a single trip is maintained and reinforced.

Performa	ance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1		DTS/DPF 1.1
(a) as primary location cultural, entertainm (b) as a focus for regul (c) in contributing to or	t outside Activity Centres of a scale nish the role of Activity Centres: s for shopping, administrative, ent and community services ar social and business gatherings maintaining a pattern of upports equitable community access lities.	None are applicable.
PO 1.2		DTS/DPF 1.2
Activity Centres through the	sidential development complements provision of services and facilities:	None are applicable.
particularly in under		
_	ities Centres where they cannot odated within an existing Activity	

Page 120 of 140 Printed on 16/12/2021

Centre to expand the range of services on offer and	
support the role of the Activity Centre.	

Resource Extraction

Assessment Provisions (AP)

Desired Outcome		
DO 1	Resource extraction activities are developed in a manner that minimises human and environmental impacts.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	nd Intensity
PO 1.1	DTS/DPF 1.1
Resource extraction activities minimise landscape damage outside of those areas unavoidably disturbed to access and exploit a resource and provide for the progressive reclamation and betterment of disturbed areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
Resource extraction activities avoid damage to cultural sites or artefacts.	None are applicable.
Water	Quality
P0 2.1	DTS/DPF 2.1
Stormwater and/or wastewater from resource extraction activities is diverted into appropriately sized treatment and retention systems to enable reuse on site.	None are applicable.
Separation Treatments,	Buffers and Landscaping
PO 3.1	DTS/DPF 3.1
Resource extraction activities minimise adverse impacts upon sensitive receivers through incorporation of separation distances and/or mounding/vegetation.	None are applicable.
PO 3.2	DTS/DPF 3.2
Resource extraction activities are screened from view from adjacent land by perimeter landscaping and/or mounding.	None are applicable.

Page 121 of 140 Printed on 16/12/2021

Site Contamination

Assessment Provisions (AP)

Desired Outcome	
DO 1	Ensure land is suitable for the proposed use in circumstances where it is, or may have been, subject to site contamination.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance
	Feature
PO 1.1	DTS/DPF 1.1
Po 1.1 Ensure land is suitable for use when land use changes to a more sensitive use.	
	and (ii) no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Page 122 of 140 Printed on 16/12/2021

Tourism Development

Assessment Provisions (AP)

Desired Outcome		
DO 1	Tourism development is built in locations that cater to the needs of visitors and positively contributes to South Australia's visitor economy.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Ger	neral
PO 1.1	DTS/DPF 1.1
Tourism development complements and contributes to local, natural, cultural or historical context where:	None are applicable.
(a) it supports immersive natural experiences (b) it showcases South Australia's landscapes and produce (c) its events and functions are connected to local food, wine and nature.	
PO 1.2	DTS/DPF 1.2
Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact.	None are applicable.
Caravan and	Tourist Parks
PO 2.1	DTS/DPF 2.1
Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures.	None are applicable.
PO 2.2	DTS/DPF 2.2
Occupants are provided privacy and amenity through landscaping and fencing.	None are applicable.
PO 2.3	DTS/DPF 2.3
Communal open space and centrally located recreation facilities are provided for guests and visitors.	12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation.

Page 123 of 140 Printed on 16/12/2021

DTS/DPF 2.4
None are applicable.
DTS/DPF 2.5
None are applicable.
DTS/DPF 2.6
None are applicable.
under the National Parks and Wildlife Act 1972
DTS/DPF 3.1
None are applicable.
DTS/DPF 3.2
None are applicable.
DTS/DPF 3.3
None are applicable.
DTS/DPF 3.4
None are applicable.

Transport, Access and Parking

Assessment Provisions (AP)

Page 124 of 140 Printed on 16/12/2021

DO 1 A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Movemen	t Systems	
PO 1.1	DTS/DPF 1.1	
Development is integrated with the existing transport system and designed to minimise its potential impact on the functional performance of the transport system.	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Industrial, commercial and service vehicle movements, loading areas and designated parking spaces are separated from passenger vehicle car parking areas to ensure efficient and safe movement and minimise potential conflict.	None are applicable.	
PO 1.4	DTS/DPF 1.4	
Development is sited and designed so that loading, unloading and turning of all traffic avoids interrupting the operation of and queuing on public roads and pedestrian paths.	All vehicle manoeuvring occurs onsite.	
Sightlines		
PO 2.1	DTS/DPF 2.1	
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.	
Vehicle Access		
PO 3.1	DTS/DPF 3.1	
Safe and convenient access minimises impact or interruption on	The access is:	

Page 125 of 140 Printed on 16/12/2021

Folicy24 - Eriquii y	1
the operation of public roads.	(a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing.
P0 3.2	DTS/DPF 3.2
Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic.	None are applicable.
P0 3.3	DTS/DPF 3.3
Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use.	None are applicable.
P0 3.4	DTS/DPF 3.4
Access points are sited and designed to minimise any adverse impacts on neighbouring properties.	None are applicable.
Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
P0 3.6	DTS/DPF 3.6
Driveways and access points are separated and minimised in number to optimise the provision of on-street visitor parking (where on-street parking is appropriate).	Driveways and access points: (a) for sites with a frontage to a public road of 20m or less, one access point no greater than 3.5m in width is provided (b) for sites with a frontage to a public road greater than 20m: (i) a single access point no greater than 6m in width is provided or (ii) not more than two access points with a width of 3.5m each are provided.

Page 126 of 140 Printed on 16/12/2021

Policy24 - Enquiry	
P0 3.7	DTS/DPF 3.7
Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.	Development does not involve a new or modified access or cause an increase in traffic through an existing access that is located within the following distance from a railway crossing: (a) 80 km/h road - 110m (b) 70 km/h road - 90m (c) 60 km/h road - 70m (d) 50km/h or less road - 50m.
PO 3.8	DTS/DPF 3.8
Driveways, access points, access tracks and parking areas are designed and constructed to allow adequate movement and manoeuvrability having regard to the types of vehicles that are reasonably anticipated.	None are applicable.
P0 3.9	DTS/DPF 3.9
Development is designed to ensure vehicle circulation between activity areas occurs within the site without the need to use public roads.	None are applicable.
Access for Peop	ole with Disabilities
PO 4.1	DTS/DPF 4.1
Development is sited and designed to provide safe, dignified and convenient access for people with a disability.	None are applicable.
Vehicle Pa	arking Rates
P0 5.1	DTS/DPF 5.1
Sufficient on-site vehicle parking and specifically marked accessible car parking places are provided to meet the needs of the development or land use having regard to factors that may support a reduced on-site rate such as: (a) availability of on-street car parking (b) shared use of other parking areas (c) in relation to a mixed-use development, where the hours of operation of commercial activities complement the residential use of the site, the provision of vehicle parking may be shared (d) the adaptive reuse of a State or Local Heritage Place.	Development provides a number of car parking spaces on-site at a rate no less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
Vehicle Pa	arking Areas
P0 6.1	DTS/DPF 6.1
Vehicle parking areas are sited and designed to minimise impact on the operation of public roads by avoiding the use of public roads when moving from one part of a parking area to another.	Movement between vehicle parking areas within the site can occur without the need to use a public road.
PO 6.2	DTS/DPF 6.2
Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced, and the like.	None are applicable.

Page 127 of 140 Printed on 16/12/2021

Policy24 - Eriquity		
P0 6.3	DTS/DPF 6.3	
Vehicle parking areas are designed to provide opportunity for integration and shared-use of adjacent car parking areas to reduce the total extent of vehicle parking areas and access points.	None are applicable.	
PO 6.4	DTS/DPF 6.4	
Pedestrian linkages between parking areas and the development are provided and are safe and convenient.	None are applicable.	
PO 6.5	DTS/DPF 6.5	
Vehicle parking areas that are likely to be used during non- daylight hours are provided with sufficient lighting to entry and exit points to ensure clear visibility to users.	None are applicable.	
PO 6.6	DTS/DPF 6.6	
Loading areas and designated parking spaces for service vehicles are provided within the boundary of the site.	Loading areas and designated parking spaces are wholly located within the site.	
PO 6.7	DTS/DPF 6.7	
On-site visitor parking spaces are sited and designed to be accessible to all visitors at all times.	None are applicable.	
Undercroft and Below Ground C	I Garaging and Parking of Vehicles	
P0 7.1	DTS/DPF 7.1	
Undercroft and below ground garaging of vehicles is designed to enable safe entry and exit from the site without compromising pedestrian or cyclist safety or causing conflict with other vehicles.	None are applicable.	
Internal Roads and Parking Areas in Resid	ential Parks and Caravan and Tourist Parks	
PO 8.1	DTS/DPF 8.1	
Internal road and vehicle parking areas are surfaced to prevent dust becoming a nuisance to park residents and occupants.	None are applicable.	
PO 8.2	DTS/DPF 8.2	
Traffic circulation and movement within the park is pedestrian friendly and promotes low speed vehicle movement.	None are applicable.	
Bicycle Parking in Designated Areas		
PO 9.1	DTS/DPF 9.1	
The provision of adequately sized on-site bicycle parking facilities encourages cycling as an active transport mode.	Areas and / or fixtures are provided for the parking and storage of bicycles at a rate not less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.	
PO 9.2	DTS/DPF 9.2	
Bicycle parking facilities provide for the secure storage and tethering of bicycles in a place where casual surveillance is possible, is well lit and signed for the safety and convenience of cyclists and deters property theft.	None are applicable.	

Page 128 of 140 Printed on 16/12/2021

PO 9.3	DTS/DPF 9.3	
Non-residential development incorporates end-of-journey facilities for employees such as showers, changing facilities and secure lockers, and signage indicating the location of the facilities to encourage cycling as a mode of journey-to-work transport.	None are applicable.	
Corner	Cut-Offs	
PO 10.1	DTS/DPF 10.1	
Development is located and designed to ensure drivers can safely turn into and out of public road junctions.	Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram:	
	Corner Cut- Off Area 4.5M Road Reserve	

Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate (unless varied by Table 2 onwards) Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.
Residential Development	
Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Group Dwelling	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Residential Flat Building	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.

Page 129 of 140 Printed on 16/12/2021

Row Dwelling where vehicle access is from the primary street	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
primary street	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Row Dwelling where vehicle access is not from the primary street (i.e. rear-loaded)	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
the primary street (i.e. real foundary)	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Semi-Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Aged / Supported Accommodation	
Retirement village	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Supported accommodation	0.3 spaces per bed.
Residential Development (Other)	
Ancillary accommodation	No additional requirements beyond those associated with the main dwelling.
Residential park	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.
Student accommodation	0.3 spaces per bed.
Workers' accommodation	0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.
Tourist	
Caravan park / tourist park	Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.
	Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.
	A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.
Tourist accommodation	1 car parking space per accommodation unit / guest room.
Commercial Uses	

Page 130 of 140 Printed on 16/12/2021

Auction room/ depot	1 space per 100m ² of building floor area plus an additional 2 spaces.
Automotive collision repair	3 spaces per service bay.
Call centre	8 spaces per 100m ² of gross leasable floor area.
Motor repair station	3 spaces per service bay.
Office	4 spaces per 100m ² of gross leasable floor area.
Retail fuel outlet	3 spaces per 100m ² gross leasable floor area.
Service trade premises	 2.5 spaces per 100m² of gross leasable floor area 1 space per 100m² of outdoor area used for display purposes.
Shop (no commercial kitchen)	5.5 spaces per 100m ² of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
	5 spaces per 100m ² of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.
Shop (in the form of a bulky goods outlet)	2.5 spaces per 100m ² of gross leasable floor area.
Shop (in the form of a restaurant or involving a commercial kitchen)	Premises with a dine-in service only (which may include a take-away component with no drive-through) - 0.4 spaces per seat. Premises with take-away service but with no seats - 12 spaces per 100m ² of total floor area plus a drive-through queue capacity of ten vehicles measured
	from the pick-up point. Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.
Community and Civic Uses	
Childcare centre	0.25 spaces per child
Library	4 spaces per 100m ² of total floor area.
Community facility	10 spaces per 100m ² of total floor area.
Hall / meeting hall	0.2 spaces per seat.

Page 131 of 140 Printed on 16/12/2021

Place of worship	1 space for every 3 visitor seats.	
Pre-school	1 per employee plus 0.25 per child (drop off/pick up bays)	
Educational establishment	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.	
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.	
	For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.	
Health Related Uses		
Hospital	4.5 spaces per bed for a public hospital.	
	1.5 spaces per bed for a private hospital.	
Consulting room	4 spaces per consulting room excluding ancillary facilities.	
Recreational and Entertainment Uses		
Cinema complex	0.2 spaces per seat.	
Concert hall / theatre	0.2 spaces per seat.	
Hotel	1 space for every 2m ² of total floor area in a public bar plus 1 space for every 6m ² of total floor area available to the public in a lounge, beer garden plus 1 space per 2 gaming machines, plus 1 space per 3 seats in a restaurant.	
Indoor recreation facility	6.5 spaces per 100m ² of total floor area for a Fitness Centre	
	4.5 spaces per 100m ² of total floor area for all other Indoor recreation facilities.	
Industry/Employment Uses		
Fuel depot	1.5 spaces per 100m ² total floor area	
	1 spaces per 100m ² of outdoor area used for fuel depot activity purposes.	
Industry	1.5 spaces per 100m ² of total floor area.	
Store	0.5 spaces per 100m ² of total floor area.	
Timber yard	1.5 spaces per 100m ² of total floor area	

Page 132 of 140 Printed on 16/12/2021

	1 space per 100m ² of outdoor area used for display purposes.
Warehouse	0.5 spaces per 100m ² total floor area.
Other Uses	
Funeral Parlour	1 space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.
Radio or Television Station	5 spaces per 100m ² of total building floor area.

Table 2 - Off-Street Car Parking Requirements in Designated Areas

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column subject to the following:

- (a) the location of the development is unable to satisfy the requirements of Table 2 Criteria (other than where a location is exempted from the application of those criteria)
- (b) the development satisfies Table 2 Criteria (or is exempt from those criteria) and is located in an area where a lawfully established carparking fund operates, in which case the number of spaces are reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.		Designated Areas
	Minimum number of spaces	Maximum number of spaces	
Development generally			
All classes of development	No minimum.	No maximum except in the Primary Pedestrian Area identified in the Primary Pedestrian Area Concept Plan, where the maximum is: 1 space for each dwelling with a total floor area less than 75 square metres 2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres 3 spaces for each dwelling with a total floor area greater than 150 square metres. Residential flat building or Residential component of a	Capital City Zone City Main Street Zone City Riverbank Zone Adelaide Park Lands Zone Business Neighbourhood Zone (within the City of Adelaide) The St Andrews Hospital Precinct Subzone and Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone

Page 133 of 140 Printed on 16/12/2021

Policy24 - Enquiry			
		multi-storey building: 1 visitor space for each 6 dwellings.	
Non-residential develop	ment		
Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	5 spaces per 100m ² of gross leasable floor area.	City Living Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	6 spaces per 100m ² of gross leasable floor area.	Strategic Innovation Zone Suburban Activity Centre Zone Suburban Business Zone Business Neighbourhood Zone Suburban Main Street Zone Urban Activity Centre Zone
Tourist accommodation	1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4 bedrooms over 100 bedrooms	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential developmen	t		
Residential component of a multi-storey building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Strategic Innovation Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone

Page 134 of 140 Printed on 16/12/2021

Residential flat building	Dwelling with no separate bedroom -0.25 spaces per dwelling	None specified.	City Living Zone Urban Activity Centre Zone
	1 bedroom dwelling - 0.75		Urban Corridor (Boulevard) Zone
	spaces per dwelling		Urban Corridor (Business) Zone
	2 bedroom dwelling - 1 space per dwelling		Urban Corridor (Living) Zone
	3 or more bedroom dwelling -		Urban Corridor (Main Street) Zone
	1.25 spaces per dwelling		Urban Neighbourhood Zone
	0.25 spaces per dwelling for visitor parking.		

Table 2 - Criteria:

The following criteria are used in conjunction with Table 2. The 'Exception' column identifies locations where the criteria do not apply and the car parking rates in Table 2 are applicable.

	Criteria		Exceptions
Metro	esignated area is wholly located within politan Adelaide and any part of the opment site satisfies one or more of the ing:	(a) (b)	All zones in the City of Adelaide Strategic Innovation Zone in the following locations: (i) City of Burnside (ii) City of Marion (iii) City of Mitcham
(a)	is within 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service ⁽²⁾	(c) (d) (e)	Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone
(b)	is within 400 metres of a bus interchange ⁽¹⁾ is within 400 metres of an O-Bahn	(f) (g)	Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
(d)	interchange ⁽¹⁾ is within 400 metres of a passenger rail station ⁽¹⁾		
(e)	is within 400 metres of a passenger tram station ⁽¹⁾		
(f)	is within 400 metres of the Adelaide Parklands.		

[NOTE(S): (1)Measured from an area that contains any platform(s), shelter(s) or stop(s) where people congregate for the purpose waiting to board a bus, tram or train, but does not include areas used for the parking of vehicles. (2) A high frequency public transit service is a route serviced every 15 minutes between 7.30am and 6.30pm Monday to Friday and every 30 minutes at night, Saturday, Sunday and public holidays until 10pm.]

Table 3 - Off-Street Bicycle Parking Requirements

The bicycle parking rates apply within designated areas located within parts of the State identified in the Schedule to Table 3.

Class of Development	Bicycle Parking Rate
	Where a development comprises more than one development type, then the overall bicycle parking rate will be taken to be the sum of the bicycle parking rates for each development type.

Page 135 of 140 Printed on 16/12/2021

Policy24 - Eriquity	
Consulting Room	1 space per 20 employees plus 1 space per 20 consulting rooms for customers.
Educational establishment	For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors.
	For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students.
Hospital	1 space per 15 beds plus 1 space per 30 beds for visitors.
Indoor recreation facility	1 space per 4 employees plus 1 space per 200m ² of gross leasable floor area for visitors.
Licensed Premises	1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area.
Office	1 space for every 200m ² of gross leasable floor area plus 2 spaces plus 1 space per 1000m ² of gross leasable floor area for visitors.
Pre-school	1 space per 20 full time employees plus 1 space per 40 full time children.
Recreation area	1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers.
Residential flat building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors.
Residential component of a multi-storey building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors.
Shop	1 space for every 300m ² of gross leasable floor area plus 1 space for every 600m ² of gross leasable floor area for customers.
Tourist accommodation	1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.

Schedule to Table 3

Designated Area	Relevant part of the State The bicycle parking rate applies to a designated area located in a relevant part of the State described below.
All zones	City of Adelaide
Business Neighbourhood Zone	Metropolitan Adelaide

Page 136 of 140 Printed on 16/12/2021

Strategic Innovation Zone	
Suburban Activity Centre Zone	
Suburban Business Zone	
Suburban Main Street Zone	
Urban Activity Centre Zone	
Urban Corridor (Boulevard) Zone	
Urban Corridor (Business) Zone	
Urban Corridor (Living) Zone	
Urban Corridor (Main Street) Zone	
Urban Neighbourhood Zone	

Waste Treatment and Management Facilities

Assessment Provisions (AP)

	Desired Outcome
DO 1	Mitigation of the potential environmental and amenity impacts of waste treatment and management facilities.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Si	ting
P0 1.1	DTS/DPF 1.1
Waste treatment and management facilities incorporate separation distances and attenuation measures within the site between waste operations areas (including all closed, operating and future cells) and sensitive receivers and sensitive environmental features to mitigate off-site impacts from noise, air and dust emissions.	None are applicable.
Soil and Wa	ter Protection
PO 2.1	DTS/DPF 2.1
Soil, groundwater and surface water are protected from contamination from waste treatment and management facilities through measures such as:	None are applicable.

Page 137 of 140 Printed on 16/12/2021

Policy24 - Eriquiry	
(a) containing potential groundwater and surface water contaminants within waste operations areas	
(b) diverting clean stormwater away from waste operations areas and potentially contaminated areas	
(c) providing a leachate barrier between waste operations areas and underlying soil and groundwater.	
P0 2.2	DTS/DPF 2.2
Wastewater lagoons are set back from watercourses to minimise environmental harm and adverse effects on water resources.	Wastewater lagoons are set back 50m or more from watercourse banks.
PO 2.3	DTS/DPF 2.3
Wastewater lagoons are designed and sited to:	None are applicable.
 (a) avoid intersecting underground waters; (b) avoid inundation by flood waters; (c) ensure lagoon contents do not overflow; (d) include a liner designed to prevent leakage. 	
PO 2.4	DTS/DPF 2.4
Waste operations areas of landfills and organic waste processing facilities are set back from watercourses to minimise adverse impacts on water resources.	Waste operations areas are set back 100m or more from watercourse banks.
Am	enity
PO 3.1	DTS/DPF 3.1
Waste treatment and management facilities are screened, located and designed to minimise adverse visual impacts on amenity.	None are applicable.
P0 3.2	DTS/DPF 3.2
Access routes to waste treatment and management facilities via residential streets is avoided.	None are applicable.
PO 3.3	DTS/DPF 3.3
Litter control measures minimise the incidence of windblown litter.	None are applicable.
PO 3.4	DTS/DPF 3.4
Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation.	None are applicable.
Ac	cess
PO 4.1	DTS/DPF 4.1
Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction.	None are applicable.
P0 4.2	DTS/DPF 4.2
Suitable access for emergency vehicles is provided to and within	None are applicable.

Page 138 of 140 Printed on 16/12/2021

waste treatment or management sites.	
Fencing a	I nd Security
PO 5.1	DTS/DPF 5.1
Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public.	Chain wire mesh or pre-coated painted metal fencing 2m or more in height is erected along the perimeter of the waste treatment of waste management facility site.
Lar	dfill
PO 6.1	DTS/DPF 6.1
Landfill gas emissions are managed in an environmentally acceptable manner.	None are applicable.
PO 6.2	DTS/DPF 6.2
Landfill facilities are separated from areas of environmental significance and land used for public recreation and enjoyment.	Landfill facilities are set back 250m or more from a public open space reserve, forest reserve, national park or Conservation Zone.
PO 6.3	DTS/DPF 6.3
Landfill facilities are located on land that is not subject to land slip.	None are applicable.
PO 6.4	DTS/DPF 6.4
Landfill facilities are separated from areas subject to flooding.	Landfill facilities are set back 500m or more from land inundated in a 1% AEP flood event.
Organic Waste Pr	ocessing Facilities
PO 7.1	DTS/DPF 7.1
Organic waste processing facilities are separated from the coast to avoid potential environment harm.	Organic waste processing facilities are set back 500m or more from the coastal high water mark.
P0 7.2	DTS/DPF 7.2
Organic waste processing facilities are located on land where the engineered liner and underlying seasonal water table cannot intersect.	None are applicable.
PO 7.3	DTS/DPF 7.3
Organic waste processing facilities are sited away from areas of environmental significance and land used for public recreation and enjoyment.	Organic waste processing facilities are set back 250m or more from a public open space reserve, forest reserve, national park or a Conservation Zone.
P0 7.4	DTS/DPF 7.4
Organic waste processing facilities are located on land that is not subject to land slip.	None are applicable.
PO 7.5	DTS/DPF 7.5
Organic waste processing facilities separated from areas subject to flooding.	Organic waste processing facilities are set back 500m or more from land inundated in a 1% AEP flood event.
Major Wastewater	Treatment Facilities
PO 8.1	DTS/DPF 8.1
Major wastewater treatment and disposal systems, including	None are applicable.

Page 139 of 140 Printed on 16/12/2021

lagoons, are designed to minimise potential adverse odour impacts on sensitive receivers, minimise public and environmental health risks and protect water quality.	
PO 8.2	DTS/DPF 8.2
Artificial wetland systems for the storage of treated wastewater are designed and sited to minimise potential public health risks arising from the breeding of mosquitoes.	None are applicable.

Workers' accommodation and Settlements

Assessment Provisions (AP)

	Desired Outcome
DO 1	Appropriately designed and located accommodation for seasonal and short-term workers in rural areas that minimises environmental and social impacts.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Workers' accommodation and settlements are obscured from scenic routes, tourist destinations and areas of conservation significance or otherwise designed to complement the surrounding landscape.	None are applicable.
PO 1.2	DTS/DPF 1.2
Workers' accommodation and settlements are sited and designed to minimise nuisance impacts on the amenity of adjacent users of land.	None are applicable.
PO 1.3	DTS/DPF 1.3
Workers' accommodation and settlements are built with materials and colours that blend with the landscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Workers' accommodation and settlements are supplied with service infrastructure such as power, water and effluent disposal sufficient to satisfy the living requirements of workers.	None are applicable.

No criteria applies to this land use. Please check the definition of the land use for further detail.

Page 140 of 140 Printed on 16/12/2021