1390-1400 GOLDEN GROVE RD GOLDEN GROVE SA 5125

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Overlay

Defence Aviation Area (All structures over 15 metres)

Hazards (Flooding)

Major Urban Transport Routes

Prescribed Wells Area

Regulated and Significant Tree

Traffic Generating Development

Water Resources

Zone

Local Activity Centre

Development Pathways

Local Activity Centre

1. Accepted Development

Means that the development type does not require planning consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Building work on railway land
- Consulting room
- Internal building work
- Office
- Partial demolition of a building or structure
- Shade sail
- Shop
- Solar photovoltaic panels (roof mounted)
- Water tank (above ground)
- Water tank (underground)

2. Code Assessed - Deemed to Satisfy

Means that the development type requires consent (planning approval). Please ensure compliance with relevant land use and development controls in the Code.

- Advertisement
- · Consulting room
- Office
- Shop
- Temporary accommodation in an area affected by bushfire

3. Code Assessed - Performance Assessed

Performance Assessed development types listed below are those for which the Code identifies relevant policies.

Additional development types that are not listed as Accepted, Deemed to Satisfy or Restricted default to a Performance assessed Pathway. Please

Page 1 of 110 Printed on 11/08/2022

contact your local council for more information.

- Advertisement
- Consulting room
- Demolition
- Dwelling
- Fence
- Land division
- Office
- Retaining wall
- Shop
- Store
- Telecommunications facility
- Verandah
- 4. Impact Assessed Restricted

Means that the development type requires approval. Classes of development that are classified as Restricted are listed in Table 4 of the relevant Zones.

Property Policy Information for above selection

Part 2 - Zones and Sub Zones

Local Activity Centre Zone

Assessment Provisions (AP)

Desired Outcome		
DO 1	A range of small-scale shops, offices, business, health and community facilities to provide daily services to and support walkable neighbourhoods.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land Use	and Intensity	
PO 1.1	DTS/DPF 1.1	
Retail, office, health and community facilities, services and other businesses provide a range of goods and services to the local community.	Development comprises one or more of the following: (a) Advertisement (b) Community facility (c) Consulting room (d) Dwelling (e) Office (f) Pre-school (g) Shop	
PO 1.2	DTS/DPF 1.2	
Residential development does not prejudice the operation of retail, office, or community facilities and services related activity within the zone.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Residential development supports the vitality of underperforming centres.	None are applicable.	
PO 1.4	DTS/DPF 1.4	
Development sited and designed to achieve vibrant and interesting streetscapes.	None are applicable.	

Page 2 of 110 Printed on 11/08/2022

PO 1.5 DTS/DPF 1.5 Changes in the use of land encourage the efficient reuse of commercial A change of use to a shop, office, consulting room or any combination of premises to maintain and enhance vibrancy within activity centres. these uses where all of the following are achieved: the area to be occupied by the proposed development is located in an existing building and is currently used as a shop, office, consulting room or any combination of these uses if the proposed change of use is for a shop that primarily involves the handling and sale of foodstuffs, areas used for the storage and collection of refuse are sited at least 10m from the site of a dwelling (other than a dwelling directly associated with the proposed shop) (c) if the proposed change of use is for a shop that primarily involves heating and cooking of foodstuffs in a commercial kitchen and is within 30m of any neighbourhood-type zone boundary or a dwelling (other than a dwelling directly associated with the proposed shop), an exhaust duct and stack (chimney) exists or is capable of being installed for discharging exhaust emissions if the change in use involves a gross leasable floor area greater than 250m² and has direct frontage to an arterial road, it achieves: the primary vehicle access (being the access where the majority of vehicles access / egress the site of the proposed development) from a road that is not an arterial road or the development is located on a site that operates as an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared off-street vehicular parking exists in accordance with the rate(s) specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas to the nearest whole number, except where: the building is a local heritage place or the required contribution will be made into a relevant car parking offset scheme (other than where a relevant contribution has previously been made) (iii) the development is located on a site that operates as an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared. Built Form and Character PO 2.1 DTS/DPF 2.1 Development complements adjacent development within the zone, and None are applicable. mitigates interface impacts on adjoining residential uses in a neighbourhood type zone, through appropriate building siting, scale and design. PO 2.2 DTS/DPF 2 2 None are applicable. Buildings are sited and designed to create pedestrian, vehicular and visual linkages between the various built-form elements within the zone and adjoining main roads. Building height and setbacks PO 3.1 DTS/DPF 3.1 Building height is consistent with the form expressed in any relevant Maximum Building height is not greater than: the following: Building Height Levels Technical and Numeric Variation and Maximum Building Height Metres Technical and Numeric Variation, and otherwise

Page 3 of 110 Printed on 11/08/2022

generally of a low rise that complements the established streetscape and local

 in all other cases (i.e. there are blank fields for both maximum building height (metres) and maximum building height (levels)) - 2 building levels up to a height of 8m.

In relation to DTS/DPF 3.1, in instances where:


- (c) more than one value is returned in the same field for DTS/DPF 3.1(a), refer to the Maximum Building Height (Metres) Technical and Numeric Variation layer or Maximum Building Height (Levels) Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development
- (d) only one value is returned for DTS/DPF 3.1(a) (i.e. there is one blank field), then the relevant height in metres or building levels applies with no criteria for the other.

PO 3.2

Buildings mitigate visual impacts of massing on residential development within a neighbourhood-type zone.

DTS/DPF 3.2

Buildings are constructed within a building envelope provided by a 45 degree plane measured from a height of 3m above natural ground level at the boundary of an allotment used for residential purposes in a neighbourhood-type zone as shown in the following diagram (except where this boundary is a southern boundary or where this boundary is the primary street boundary):

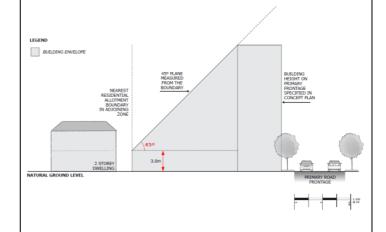


PO 3.3

Buildings mitigate overshadowing of residential development within a neighbourhood-type zone.

DTS/DPF 3.3

Buildings on sites with a southern boundary adjoining an allotment used for residential purposes in a neighbourhood-type zone are constructed within a building envelope provided by a 30 degree plane grading north measured from a height of 3m above natural ground level at the southern boundary, as shown in the following diagram:

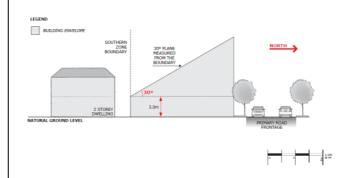

PO 3.4

Buildings on an allotment fronting a road that is not a State maintained road, and where land on the opposite side of the road is within a neighbourhood-type zone, provides an orderly transition to the built form scale envisaged in the adjacent zone to complement the streetscape character.

DTS/DPF 3.4

None are applicable.

Advertisements

Page 4 of 110 Printed on 11/08/2022

PO 4.1	DTS/DPF 4.1
Advertisements are sited and designed to achieve an overall consistency of appearance along individual street frontages.	None are applicable.
PO 4.2	DTS/DPF 4.2
Freestanding advertisements:	Freestanding advertisements:
 (a) identify the associated business(es) (b) are of a size that is commensurate with the scale of the centre and the street frontage (c) avoid visual clutter (d) positively respond to the context without dominating the locality. 	 (a) do not exceed 5m in height, the adjacent building wall height, or the zone's height allowance (whichever is the lesser) (b) do not have a sign face that exceeds 4m² per side.
Conce	pt Plans
PO 5.1	DTS/DPF 5.1
Development is compatible with the outcomes sought by any relevant Concept Plan contained within Part 12 - Concept Plans of the Planning and Design Code to support the orderly development of land through staging of development and provision of infrastructure.	The site of the development is wholly located outside any relevant Concept Plan boundary. The following Concept Plans are relevant: In relation to DTS/DPF 5.1, in instances where: (a) one or more Concept Plan is returned, refer to Part 12 - Concept Plans in the Planning and Design Code to determine if a Concept Plan is relevant to the site of the proposed development. Note: multiple concept plans may be relevant. (b) in instances where 'no value' is returned, there is no relevant concept plan and DTS/DPF 5.1 is met.

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

Notification tables exclude the classes of development listed in Column A from notification provided that they do not fall within a corresponding exclusion prescribed in Column B.

Where a development or an element of a development falls within more than one class of development listed in Column A, it will be excluded from notification if it is excluded (in its entirety) under any of those classes of development. It need not be excluded under all applicable classes of development.

Where a development involves multiple performance assessed elements, all performance assessed elements will require notification (regardless of whether one or more elements are excluded in the applicable notification table) unless every performance assessed element of the application is excluded in the applicable notification table, in which case the application will not require notification.

Class of Development		Exceptions
(Column A)		(Column B)
1.	Development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development.	None specified.
2.	Any kind of development where the site of the development is not adjacent land to a site (or land) used for residential purposes in a neighbourhood-type zone.	Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.
3.	Any development involving any of the following (or of any combination of any of the following): (a) advertisement (b) air handling unit, air conditioning system or exhaust fan (c) building work on railway land (d) community facility	Except development that exceeds the maximum building height specified in Local Activity Centre Zone DTS/DPF 3.1 or does not satisfy any of the following: 1. Local Activity Centre Zone DTS/DPF 3.2 2. Local Activity Centre Zone DTS/DPF 3.3.

Page 5 of 110 Printed on 11/08/2022

- Olicyz4 - Eriquii y			
(e) consulting room	-		
(f) deck			
(g) dwelling			
(h) fence			
(i) land division			
(j) office			
(k) retaining wall			
(I) shade sail			
(m) shop			
(n) solar photovoltaic panels (roof mounted)			
(o) verandah			
(p) water tank.			
 Any development involving any of the following (or of any combination of any of the following): 	None specified.		
(a) internal building works			
(b) replacement building			
 (c) temporary accommodation in an area affected by bushfire 			
(d) tree damaging activity.			
5. Demolition.	Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.		
Placement of Notices - Exemptions for Performance Assessed Development			
None specified.			

Part 3 - Overlays

None specified.

Defence Aviation Area Overlay

Placement of Notices - Exemptions for Restricted Development

Assessment Provisions (AP)

Desired Outcome		
DO 1	Management of potential impacts of buildings on the operational and safety requirements of Defence Aviation Areas.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Built Form		
PO 1.1	DTS/DPF 1.1	
Building height does not pose a hazard to the operations of Defence Aviation	Building height does not exceed the relevant height specified by the <i>Defence</i>	

Page 6 of 110 Printed on 11/08/2022

Areas.	Aviation Area Overlay.
PO 1.2	DTS/DPF 1.2
Exhaust stacks are designed and sited to minimise plume impacts on aircraft movements associated with Defence Aviation Areas.	Development does not include exhaust stacks.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Hazards (Flooding) Overlay

Assessment Provisions (AP)

Desired Outcome		
DO 1	Impacts on people, property, infrastructure and the environment from high flood risk are minimised by retaining areas free from development, and minimising intensification where development has occurred.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land	Division
PO 1.1	DTS/DPF 1.1
Land division is limited to areas where the consequences to buildings and safety are low and can be readily managed or overcome.	None are applicable.
Lan	d Use
PO 2.1	DTS/DPF 2.1
Development sited and designed to minimise exposure of people and property to unacceptable flood risk.	None are applicable.
PO 2.2	DTS/DPF 2.2
Buildings housing vulnerable people, community services facilities, key infrastructure and emergency services are sited away from flood prone areas to enable uninterrupted operation of services and reduce likelihood of entrapment.	Pre-schools, educational establishments, retirement and supported accommodation, emergency services facilities, hospitals and prisons are not located within the Overlay area.
Flood R	tesilience
PO 3.1	DTS/DPF 3.1
Development avoids the need for flood protection works.	None are applicable.
PO 3.2	DTS/DPF 3.2
Development does not cause unacceptable impacts on any adjoining property by the diversion of flood waters or an increase in flood velocity or flood level.	None are applicable.

Page 7 of 110 Printed on 11/08/2022

1 Oloy24 Enquity	
PO 3.3	DTS/DPF 3.3
Development does not impede the flow of floodwaters through the allotment or the surrounding land, or cause an unacceptable loss of flood storage.	None are applicable.
PO 3.4	DTS/DPF 3.4
Development avoids frequently flooded or high velocity areas, other than where it is part of a flood mitigation scheme to reduce flood impact.	Other than a recreation area, development is located outside of the 5% AEP principal flow path.
PO 3.5	DTS/DPF 3.5
Buildings are sited, designed and constructed to prevent the entry of floodwaters in a 1% AEP flood event where the entry of floodwaters is likely to result in undue damage to, or compromise ongoing activities within, buildings.	Buildings comprise one of the following: (a) a porch or portico with at least 2 open sides (b) a verandah with at least 3 open sides (c) a carport or outbuilding with at least 2 open sides (whichever elevations face the direction of the flow) (d) any post construction with open sides (e) a building with a finished floor level that is at least 300mm above the height of a 1% AEP flood event.
PO 3.6	DTS/DPF 3.6
Fences do not unreasonably impede floodwaters.	A post and wire fence (other than a chain mesh fence).
Environmen	tal Protection
PO 4.1	DTS/DPF 4.1
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building during a 1% AEP flood event to avoid potential environmental harm.	Development involving the storage or disposal of hazardous materials is wholly located outside of the 1% AEP flood plain or flow path.
PO 4.2	DTS/DPF 4.2
Development does not create or aggravate the potential for erosion or siltation or lead to the destruction of vegetation during a flood.	None are applicable.
Site Ea	rthworks
PO 5.1	DTS/DPF 5.1
The depth and extent of filling required to raise the finished floor level of a building does not cause unacceptable impact on any adjoining property by diversion of flood waters, an increase in flood velocity or flood level, or an unacceptable loss of flood storage.	None are applicable.
PO 5.2	DTS/DPF 5.2
Driveways, access tracks and parking areas are designed and constructed to minimise excavation and filling.	Filling for ancillary purposes: (a) does not exceed 300mm above existing ground level (b) is no more than 5m wide.
Access	
PO 6.1	DTS/DPF 6.1
Development does not occur on land:	None are applicable.
 (a) from which evacuation to areas not vulnerable to flood risk is not possible during a 1% AEP flood event (b) which cannot be accessed by emergency services vehicles or essential utility service vehicles during a 1% AEP flood event. 	
PO 6.2	DTS/DPF 6.2
Access driveways and tracks to significant development (i.e. dwellings, places	None are applicable.

Page 8 of 110 Printed on 11/08/2022

of work, etc.) consist of a safe, all-weather trafficable surface that is	
accessible during a 1% AEP flood event.	

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Major Urban Transport Routes Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Safe and efficient operation of Major Urban Transport Routes for all road users.		
DO 2	Provision of safe and efficient access to and from Major Urban Transport Routes.		

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance	Dee	med-to-Satisfy Criteria / Designated Performance
Outcome		Feature
		Access - Safe Entry and Exit (Traffic Flow)
PO 1.1	DTS/DPF 1.1	
Access is designed to allow	An access po	int satisfies (a), (b) or (c):
safe entry and exit to and		
from a site to meet the		e servicing a single (1) residential dwelling / residential allotment:
needs of development and	(i)	it will not result in more than one access point
minimise traffic flow	(ii)	vehicles can enter and exit the site in a forward direction
interference associated with	(iii)	vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
access movements along adjacent State Maintained	(iv)	passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road
Roads.	(v)	have a width of between 3m and 4m (measured at the site boundary).
	(b) where	e the development will result in 2 and up to 6 dwellings:
	(i)	it will not result in more than one access point servicing the development site
	(ii)	entry and exit movements are left turn only
	(iii)	vehicles can enter and exit the site in a forward direction
	(iv)	vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees;
	(v)	passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane of the road
	(vi)	have a width of between 5.8m to 6m (measured at the site boundary) and an access depth of 6m (measured from the site boundary into the site).
	(c) where	e the development will result in over 7 dwellings, or is a non-residential land use:
	(i)	it will not result in more than one access point servicing the development site
	(ii)	vehicles can enter and exit the site using left turn only movements
	(iii)	vehicles can enter and exit the site in a forward direction
	(iv)	vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees

Page 9 of 110 Printed on 11/08/2022

- (v) have a width of between 6m and 7m (measured at the site boundary), where the development is expected to accommodate vehicles with a length of 6.4m or less
- (vi) have a width of between 6m and 9m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 6.4m to 8.8m
- (vii) have a width of between 9m and 12m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 8.8m to 12.5m
- (viii) provides for simultaneous two-way vehicle movements at the access;
 - A. with entry and exit movements for vehicles with a length up to 5.2m vehicles being fully within the kerbside lane of the road

and

B. with entry movements of 8.8m vehicles (where relevant) being fully within the kerbside lane of the road and the exit movements of 8.8m vehicles do not cross the centreline of the road.

Access - On-Site Queuing


PO 2.1

Sufficient accessible on-site queuing adjacent to access points is provided to meet the needs of development so that all vehicle queues can be contained fully within the boundaries of the development site, to minimise interruption of the functional performance of the road and maintain safe vehicle movements.

DTS/DPF 2.1

An access point in accordance with one of the following:

(a) will not service, or is not intended to service, more than 6 dwellings and there are no internal driveways, intersections, car parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site) as shown in the following diagram:



- (b) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - i) is expected to be serviced by vehicles with a length no greater than 6.4m
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site).
- (c) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length greater than a 6.4m small rigid vehicle
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)
 - (iii) any termination of, or change in priority of movement within the main car park aisle is located far enough into the site so that the largest vehicle expected on-site can store fully within the site before being required to stop
 - (iv) all parking or manoeuvring areas for commercial vehicles are located a minimum of 12m or the length of the largest vehicle expected on site from the access (measured from the site boundary into the site) as shown in the following diagram:



Access - Location (Spacing) - Existing Access Points

PO 3.1 DTS/DPF 3.1

Page 10 of 110 Printed on 11/08/2022

Existing access points designed to accommodate the type and volume of traffic likely to be generated by the development.

An existing access point satisfies (a), (b) or (c):

- (a) it will not service, or is not intended to service, more than 6 dwellings
- (b) it is not located on a Controlled Access Road and will not service development that will result in a larger class of vehicle expected to access the site using the existing access
- (c) it is not located on a Controlled Access Road and development constitutes:
 - change of use between an office less than 500m² gross leasable floor area and a consulting room less than 500m² gross leasable floor area or vice versa
 - (ii) change in use from a shop to an office, consulting room or personal or domestic services establishment
 - (iii) change of use from a consulting room or office less than 250m² gross leasable floor area to shop less than 250m² gross leasable floor area
 - (iv) change of use from a shop less than 500m² gross leasable floor area to a warehouse less than 500m² gross leasable floor area
 - (v) an office or consulting room with a gross leasable floor area less than 500m².

Access - Location (Spacing) - New Access Points


PO 4.1

New access points are spaced apart from any existing access point or public road junction to manage impediments to traffic flow and maintain safe and efficient operating conditions on the road.

DTS/DPF 4.1

A new access point satisfies (a), (b) or (c):

(a) where a development site is intended to serve between 1 and 6 dwellings and has frontage to a local road (not being a Controlled Access Road) with a speed environment of 60km/h or less, the new access point is provided on the local road and located a minimum of 6.0m from the tangent point as shown in the following diagram:

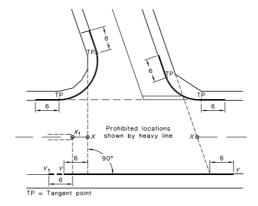

NOTE

The points marked X_1 and X are respectively at the median end on a divided road and at the intersection of the main road centre-line and the extensions of the side road property lines shown as dotted lines, on an undivided road. On a divided road, dimension Y_1 -Y extends to Point Y_1 .

- (b) where the development site is intended to serve between 1 and 6 dwellings and access from a local road (being a road that is not a State Maintained Road) is not available, the new access:
 - (i) is not located on a Controlled Access Road
 - (ii) is not located on a section of road affected by double barrier lines
 - (iii) will be on a road with a speed environment of 70km/h or less
 - (iv) is located outside of the bold lines on the diagram shown in the diagram following part (a)
 - (v) located minimum of 6m from a median opening or pedestrian crossing.
- (c) where DTS/DPF 4.1 part (a) and (b) do not apply and access from an alternative local road at least 25m from the State Maintained Road is not available, and the access is not located on a Controlled Access Road, the new access is separated in accordance with the following:

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes	
50 km/h or less	No spacing requirement	20m	
60 km/h	40m	123m	
70 km/h	55m	151m	
80 km/h	70m	181m	
90 km/h	90m	214m	
100 km/h	110m	248m	
110 km/h	135m	285m	

Access - Location (Sight Lines)

PO 5.1 DTS/DPF 5.1


Page 11 of 110 Printed on 11/08/2022

Access points are located and designed to accommodate sight lines that enable drivers and pedestrians to navigate potential conflict points with roads in a controlled and safe manner.


An access point satisfies (a) or (b):

(a) drivers approaching or exiting an access point have an unobstructed line of sight in accordance with the following (measured at a height of 1.1m above the surface of the road):

Speed Limit	Access Point serving 1-6 dwellings	Access point serving all other development
40 km/h or less	40m	73m
50 km/h	55m	97m
60 km/h	73m	123m
70 km/h	92m	151m
80 km/h	114m	181m
90 km/h	139m	214m
100 km/h	165m	248m
110km/h	193m	285m

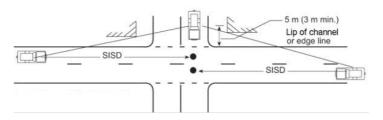

(b) pedestrian sightlines in accordance with the following diagram:

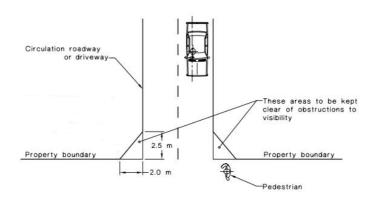

Access - Mud and Debris

PO 6.1

DTS/DPF 6.1

Access points constructed to minimise mud or other debris being carried or transferred onto the road to ensure safe road operating conditions.

Where the road has an unsealed shoulder and the road is not kerbed the access way is sealed from the edge of seal on the road for a minimum of 10m or to the property boundary (whichever is closer)

Access - Stormwater

PO 7.1

DTS/DPF 7.1

Access points designed to minimise negative impact on roadside drainage of water.

Development does not:

- (a) decrease the capacity of an existing drainage point
- (b) restrict or prevent the flow of stormwater to an existing drainage point and system.

Building on Road Reserve

PO 8.1

DTS/DPF 8.1

Buildings or structures that encroach onto, above or below road reserves designed and sited to minimise impact on safe No encroachment of buildings or structures onto, above or below the road reserve.

Page 12 of 110 Printed on 11/08/2022

Policy24 - Enquiry		
movements by all road users.		
	Public Road Junctions	
PO 9.1 New junctions with public roads (including the opening	DTS/DPF 9.1 Development does not comprise any of the following:	
of unmade public road junctions) or modifications to existing road junctions located and designed to ensure safe and efficient road operating conditions are maintained on the State Maintained Road.	 (a) creating a new junction with a public road (b) opening an unmade public road junction (c) modifying an existing public road junction. 	
	Corner Cut-Offs	
PO 10.1 Development is located and designed to maintain sightlines for drivers turning into and out of public road junctions to contribute to driver safety.	DTS/DPF 10.1 Development does not involve building work, or building work is located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram: Corner Cut-Off Area Allotment Boundary Allotment Boundary Road Reserve Road Reserve	

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Prescribed Wells Area Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1		Sustainable water use in prescribed wells areas.	

Page 13 of 110 Printed on 11/08/2022

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1 All development, but in particular involving any of the following:	DTS/DPF 1.1 Development satisfies either of the following:
(a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry has a lawful, sustainable and reliable water supply that does not place undue strain on water resources in prescribed wells areas.	 (a) the applicant has a current water licence in which sufficient spare capacity exists to accommodate the water needs of the proposed use or (b) the proposal does not involve the taking of water for which a licence would be required under the <i>Landscape South Australia Act 2019</i>.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Any of the following classes of development that require or may require water to be taken in addition to any allocation that has already been granted under the <i>Landscape South Australia Act 2019:</i> (a) horticulture (b) activities requiring irrigation (c) aquaculture (d) industry (e) intensive animal husbandry (f) commercial forestry. Commercial forestry that requires a forest water licence under Part 8 Division 6 of the <i>Landscape South Australia Act 2019</i> .	The Chief Executive of the Department of the Minister responsible for the administration of the Landscape South Australia Act 2019.	To provide expert technical assessment and direction to the relevant authority on the taking of water to ensure development is undertaken sustainably.	Development of a class to which Schedule 9 clause 3 item 13 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Regulated and Significant Tree Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Conservation of regulated and significant trees to provide aesthetic and environmental benefits and mitigate tree loss.

 $Performance\ Outcomes\ (PO)\ and\ Deemed\ to\ Satisfy\ (DTS)\ /\ Designated\ Performance\ Feature\ (DPF)\ Criteria$

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Tree Retention and Health		
PO 1.1	DTS/DPF 1.1	
Regulated trees are retained where they:	None are applicable.	

Page 14 of 110 Printed on 11/08/2022

(a)		an important visual contribution to local character and amenity	
(b)		igenous to the local area and listed under the <i>National Parks</i> idlife Act 1972 as a rare or endangered native species	
(c)		e an important habitat for native fauna.	
PO 1.2			DTS/DPF 1.2
Significa	ant trees	are retained where they:	None are applicable.
(a)	make a	an important contribution to the character or amenity of the ea	
(b)		igenous to the local area and are listed under the <i>National</i> and <i>Wildlife Act 1972</i> as a rare or endangered native species	
(c)	repres	ent an important habitat for native fauna	
(d)		rt of a wildlife corridor of a remnant area of native vegetation	
(e)	are im	portant to the maintenance of biodiversity in the local ment	
	and / o		
(f)	form a	notable visual element to the landscape of the local area.	
PO 1.3			DTS/DPF 1.3
		g activity not in connection with other development satisfies (a)	None are applicable.
and (b):	:		
(a)	tree da	maging activity is only undertaken to:	
	(i)	remove a diseased tree where its life expectancy is short	
	(ii)	mitigate an unacceptable risk to public or private safety due to limb drop or the like	
	(iii)	rectify or prevent extensive damage to a building of value as comprising any of the following:	
		A. a Local Heritage Place	
		B. a State Heritage Place	
		C. a substantial building of value	
		and there is no reasonable alternative to rectify or prevent such damage other than to undertake a tree damaging activity	
	(iv)	reduce an unacceptable hazard associated with a tree within 20m of an existing residential, tourist accommodation or other habitable building from bushfire	
	(v)	treat disease or otherwise in the general interests of the health of the tree and / or	
	(vi)	maintain the aesthetic appearance and structural integrity of the tree	
(b)	in relat	on to a significant tree, tree-damaging activity is avoided	
		all reasonable remedial treatments and measures have been ined to be ineffective.	
PO 1.4			DTS/DPF 1.4
A tree-d	-	g activity in connection with other development satisfies all the	None are applicable.
(2)	it	nmodetee the responsible development of load in access	
(a)	with the	nmodates the reasonable development of land in accordance relevant zone or subzone where such development might not se be possible	
(b)	in the c	ase of a significant tree, all reasonable development options sign solutions have been considered to prevent substantial maging activity occurring.	
		Ground work	affecting trees
PO 2.1			DTS/DPF 2.1
Regulat	ted and	significant trees, including their root systems, are not unduly	None are applicable.
1		y excavation and / or filling of land, or the sealing of surfaces y of the tree to support their retention and health.	

Page 15 of 110 Printed on 11/08/2022

Land I	Division
PO 3.1	DTS/DPF 3.1
Land division results in an allotment configuration that enables its subsequent development and the retention of regulated and significant trees as far as is reasonably practicable.	Land division where: (a) there are no regulated or significant trees located within or adjacent to the plan of division or (b) the application demonstrates that an area exists to accommodate subsequent development of proposed allotments after an allowance has been made for a tree protection zone around any regulated tree within and adjacent to the plan of division.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Traffic Generating Development Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes and Major Urban Transport Routes for all road users.		
DO 2	Provision of safe and efficient access to and from urban transport routes and major urban transport routes.		

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Traffic General	ting Development
PO 1.1 Development designed to minimise its potential impact on the safety, efficiency and functional performance of the State Maintained Road network.	DTS/DPF 1.1 Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.
PO 1.2 Access points sited and designed to accommodate the type and volume of traffic likely to be generated by development.	DTS/DPF 1.2 Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments

Page 16 of 110 Printed on 11/08/2022

, , ,			
	(b) commerc	cial development with a gross floor area of 10,000m2 or more	
	(c) retail dev	velopment with a gross floor area of 2,000m2 or more	
		ouse or transport depot with a gross leasable floor area of or more	
	(e) industry	with a gross floor area of 20,000m2 or more	
	(f) educatio	nal facilities with a capacity of 250 students or more.	
PO 1.3	DTS/DPF 1.3		
Sufficient accessible on-site queuing provided to meet the needs of the	Access is obtained directly from a State Maintained Road where it involves		
development so that queues do not impact on the State Maintained Road network.	any of the following types of development:		
	(a) land divis	sion creating 50 or more additional allotments	
	(b) commerci	cial development with a gross floor area of 10,000m2 or more	
	(c) retail dev	velopment with a gross floor area of 2,000m2 or more	
	(d) a wareho 8,000m2	ouse or transport depot with a gross leasable floor area of	
	(e) industry	with a gross floor area of 20,000m2 or more	
	(f) educatio	nal facilities with a capacity of 250 students or more.	

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, any of the following classes of development that are proposed within 250m of a State Maintained Road: (a) land division creating 50 or more additional allotment (b) commercial development with a gross floor area of 10,000m² or more (c) retail development with a gross floor area of 2,000m² more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m² or more (e) industry with a gross floor area of 20,000m² or more (f) educational facilities with a capacity of 250 students more.	or	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Water Resources Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Protection of the quality of surface waters considering adverse water quality impacts associated with projected reductions in rainfall and warmer air temperatures as a result of climate change.
DO 2	Maintain the conveyance function and natural flow paths of watercourses to assist in the management of flood waters and stormwater runoff.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 17 of 110 Printed on 11/08/2022

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
Water C	atchment
PO 1.1	DTS/DPF 1.1
Watercourses and their beds, banks, wetlands and floodplains (1% AEP flood extent) are not damaged or modified and are retained in their natural state, except where modification is required for essential access or maintenance purposes.	None are applicable.
PO 1.2	DTS/DPF 1.2
Development avoids interfering with the existing hydrology or water regime of swamps and wetlands other than to improve the existing conditions to enhance environmental values.	None are applicable.
PO 1.3	DTS/DPF 1.3
Wetlands and low-lying areas providing habitat for native flora and fauna are not drained, except temporarily for essential management purposes to enhance environmental values.	None are applicable.
PO 1.4	DTS/DPF 1.4
Watercourses, areas of remnant native vegetation, or areas prone to erosion that are capable of natural regeneration are fenced off to limit stock access.	None are applicable.
PO 1.5	DTS/DPF 1.5
Development that increases surface water run-off includes a suitably sized strip of vegetated land on each side of a watercourse to filter runoff to: (a) reduce the impacts on native aquatic ecosystems (b) minimise soil loss eroding into the watercourse.	A strip of land 20m or more wide measured from the top of existing banks on each side of the watercourse is free from development, livestock use and revegetated with locally indigenous vegetation.
PO 1.6	DTS/DPF 1.6
Development resulting in the depositing or placing of an object or solid material in a watercourse or lake occurs only where it involves any of the following:	None are applicable.
(a) the construction of an erosion control structure	
(b) devices or structures used to extract or regulate water flowing in a watercourse	
(c) devices used for scientific purposes	
(d) the rehabilitation of watercourses.	
PO 1.7	DTS/DPF 1.7
Watercourses, floodplains (1% AEP flood extent) and wetlands protected and enhanced by retaining and protecting existing native vegetation.	None are applicable.
PO 1.8	DTS/DPF 1.8
Watercourses, floodplains (1% AEP flood extent) and wetlands are protected and enhanced by stabilising watercourse banks and reducing sediments and nutrients entering the watercourse.	None are applicable.
PO 1.9	DTS/DPF 1.9
Dams, water tanks and diversion drains are located and constructed to maintain the quality and quantity of flows required to meet environmental and downstream needs.	None are applicable.

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory

Page 18 of 110 Printed on 11/08/2022

			Reference
None	None	None	None

Part 4 - General Development Policies

Advertisements

Assessment Provisions (AP)

Desired Outcome		
	Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Арр	earance
PO 1.1	DTS/DPF 1.1
Advertisements are compatible and integrated with the design of the building and/or land they are located on.	Advertisements attached to a building satisfy all of the following: (a) are not located in a Neighbourhood-type zone (b) where they are flush with a wall: (i) if located at canopy level, are in the form of a fascia sign (ii) if located above canopy level: A. do not have any part rising above parapet height B. are not attached to the roof of the building (c) where they are not flush with a wall:
	(i) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (ii) if attached to a two-storey building: A. has no part located above the finished floor level of the second storey of the building B. does not protrude beyond the outer limits of any verandah structure below C. does not have a sign face that exceeds 1m2 per side.
	(d) if located below canopy level, are flush with a wall (e) if located at canopy level, are in the form of a fascia sign (f) if located above a canopy: (i) are flush with a wall (ii) do not have any part rising above parapet height (iii) are not attached to the roof of the building.
	 (g) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (h) if attached to a two-storey building, have no part located above the finished floor level of the second storey of the building

Page 19 of 110 Printed on 11/08/2022

	(i) where they are flush with a wall, do not, in combination with any other existing sign, cover more than 15% of the building facade to which they are attached.
PO 1.2	DTS/DPF 1.2
Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.	Where development comprises an advertising hoarding, the supporting structure is:
	(a) concealed by the associated advertisement and decorative detailing
	or (b) not visible from an adjacent public street or thoroughfare, other than
	a support structure in the form of a single or dual post design.
PO 1.3	DTS/DPF 1.3
Advertising does not encroach on public land or the land of an adjacent allotment.	Advertisements and/or advertising hoardings are contained within the boundaries of the site.
PO 1.4	DTS/DPF 1.4
Where possible, advertisements on public land are integrated with existing	Advertisements on public land that meet at least one of the following:
structures and infrastructure.	(a) achieves Advertisements DTS/DPF 1.1
	(b) are integrated with a bus shelter.
PO 1.5	DTS/DPF 1.5
Advertisements and/or advertising hoardings are of a scale and size	None are applicable.
appropriate to the character of the locality.	
Proliferation of	Advertisements
PO 2.1	DTS/DPF 2.1
Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	No more than one freestanding advertisement is displayed per occupancy.
PO 2.2	DTS/DPF 2.2
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.
PO 2.3	DTS/DPF 2.3
Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	Advertisements satisfy all of the following:
	(a) are attached to a building
	(b) other than in a Neighbourhood-type zone, where they are flush with a wall, cover no more than 15% of the building facade to which they
	are attached (c) do not result in more than one sign per occupancy that is not flush
	with a wall.
Advertising Content	
PO 3.1	DTS/DPF 3.1
Advertisements are limited to information relating to the lawful use of land they	Advertisements contain information limited to a lawful existing or proposed
are located on to assist in the ready identification of the activity or activities on the land and avoid unrelated content that contributes to visual clutter and	activity or activities on the same site as the advertisement.
untidiness.	
Amenit	y Impacts
PO 4.1	DTS/DPF 4.1
Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	Advertisements do not incorporate any illumination.
Se	I afety
PO 5.1	DTS/DPF 5.1
Advertisements and/or advertising hoardings erected on a verandah or	Advertisements have a minimum clearance of 2.5m between the top of the

Page 20 of 110 Printed on 11/08/2022

Policy24 - Enquiry	
projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	footpath and base of the underside of the sign.
PO 5.2	DTS/DPF 5.2
Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	No advertisement illumination is proposed.
PO 5.3	DTS/DPF 5.3
Advertisements and/or advertising hoardings do not create a hazard to drivers by: (a) being liable to interpretation by drivers as an official traffic sign or signal (b) obscuring or impairing drivers' view of official traffic signs or signals (c) obscuring or impairing drivers' view of features of a road that are potentially hazardous (such as junctions, bends, changes in width and traffic control devices) or other road or rail vehicles at/or approaching level crossings.	Advertisements satisfy all of the following: (a) are not located in a public road or rail reserve (b) are located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram Corner Cut-Off Area 4.5M Road Reserve Road Reserve
PO 5.4 Advertisements and/or advertising hoardings do not create a hazard by distracting drivers from the primary driving task at a location where the demands on driver concentration are high.	DTS/DPF 5.4 Advertisements and/or advertising hoardings are not located along or adjacent to a road having a speed limit of 80km/h or more.
PO 5.5	DTS/DPF 5.5
Advertisements and/or advertising hoardings provide sufficient clearance from the road carriageway to allow for safe and convenient movement by all road users.	Where the advertisement or advertising hoarding is: (a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb (b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from the edge of the seal (c) on any other kerbed or unkerbed road, the advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal: (a) 110 km/h road - 14m (b) 100 km/h road - 13m (c) 90 km/h road - 10m (d) 70 or 80 km/h road - 8.5m.
PO 5.6 Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 5.6 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).

Animal Keeping and Horse Keeping

Assessment Provisions (AP)

Desired Outcome		
DO 1	Animals are kept at a density that is not beyond the carrying capacity of the land and in a manner that minimises their adverse effects on the environment, local amenity and surrounding development.	

Page 21 of 110 Printed on 11/08/2022

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting ar	nd Design
PO 1.1 Animal keeping, horse keeping and associated activities do not create adverse impacts on the environment or the amenity of the locality.	DTS/DPF 1.1 None are applicable.
PO 1.2 Animal keeping and horse keeping is located and managed to minimise the potential transmission of disease to other operations where animals are kept.	DTS/DPF 1.2 None are applicable.
Horse	Keeping
PO 2.1 Water from stable wash-down areas is directed to appropriate absorption areas and/or drainage pits to minimise pollution of land and water.	DTS/DPF 2.1 None are applicable.
PO 2.2 Stables, horse shelters or associated yards are sited appropriate distances away from sensitive receivers and/or allotments in other ownership to avoid adverse impacts from dust, erosion and odour.	DTS/DPF 2.2 Stables, horse shelters and associated yards are sited in accordance with all of the following: (a) 30m or more from any sensitive receivers (existing or approved) on land in other ownership (b) where an adjacent allotment is vacant and in other ownership, 30m or more from the boundary of that allotment.
PO 2.3 All areas accessible to horses are separated from septic tank effluent disposal areas to protect the integrity of that system. Stable flooring is constructed with an impervious material to facilitate regular cleaning.	DTS/DPF 2.3 Septic tank effluent disposal areas are enclosed with a horse-proof barrier such as a fence to exclude horses from this area.
PO 2.4 To minimise environmental harm and adverse impacts on water resources, stables, horse shelters and associated yards are appropriately set back from a watercourse.	DTS/DPF 2.4 Stables, horse shelters and associated yards are set back 50m or more from a watercourse.
PO 2.5 Stables, horse shelters and associated yards are located on slopes that are stable to minimise the risk of soil erosion and water runoff.	DTS/DPF 2.5 Stables, horse shelters and associated yards are not located on land with a slope greater than 10% (1-in-10).
Ker	nels
PO 3.1 Kennel flooring is constructed with an impervious material to facilitate regular cleaning.	DTS/DPF 3.1 The floors of kennels satisfy all of the following: (a) are constructed of impervious concrete (b) are designed to be self-draining when washed down.
PO 3.2	DTS/DPF 3.2
Kennels and exercise yards are designed and sited to minimise noise nuisance to neighbours through measures such as: (a) adopting appropriate separation distances (b) orientating openings away from sensitive receivers.	Kennels are sited 500m or more from the nearest sensitive receiver on land in other ownership.
PO 3.3	DTS/DPF 3.3

Page 22 of 110 Printed on 11/08/2022

Policy24 - Enquiry

Dogs are regularly observed and managed to minimise nuisance impact on adjoining sensitive receivers from animal behaviour.	Kennels are sited in association with a permanent dwelling on the land.
w	l'astes
PO 4.1	DTS/DPF 4.1
Storage of manure, used litter and other wastes (other than wastewater lagoons) is designed, constructed and managed to minimise attracting and harbouring vermin.	None are applicable.
PO 4.2	DTS/DPF 4.2
Facilities for the storage of manure, used litter and other wastes (other than wastewater lagoons) are located to minimise the potential for polluting water resources.	Waste storage facilities (other than wastewater lagoons) are located outside the 1% AEP flood event areas.

Aquaculture

Assessment Provisions (AP)

	Desired Outcome
DO 1	Aquaculture facilities are developed in an ecologically, economically and socially sustainable manner to support an equitable sharing of marine, coastal and inland resources and mitigate conflict with other water-based and land-based uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Land-based Aquaculture		
PO 1.1	DTS/DPF 1.1	
Land-based aquaculture and associated components are sited and designed to mitigate adverse impacts on nearby sensitive receivers.	Land-based aquaculture and associated components are located to satisfy all of the following:	
	 (a) 200m or more from a sensitive receiver in other ownership (b) 500m or more from the boundary of a zone primarily intended to accommodate sensitive receivers. 	
PO 1.2	DTS/DPF 1.2	
Land-based aquaculture and associated components are sited and designed to prevent surface flows from entering ponds in a 1% AEP sea flood level event.	None are applicable.	
PO 1.3	DTS/DPF 1.3	
Land-based aquaculture and associated components are sited and designed to prevent pond leakage that would pollute groundwater.	None are applicable.	
PO 1.4	DTS/DPF 1.4	
Land-based aquaculture and associated components are sited and designed to prevent farmed species escaping and entering into any waters.	None are applicable.	
PO 1.5	DTS/DPF 1.5	
Land-based aquaculture and associated components, including intake and discharge pipes, are designed to minimise the need to traverse sensitive areas to minimise impact on the natural environment.	None are applicable.	
PO 1.6	DTS/DPF 1.6	

Page 23 of 110 Printed on 11/08/2022

Pipe inlets and outlets associated with land-based aquaculture are sited and designed to minimise the risk of disease transmission. PO 1.7 Storage areas associated with aquaculture activity are integrated with the use of the land and sited and designed to minimise their visual impact on the surrounding environment. Marine Base PO 2.1 Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including: (a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems. PO 2.2 Marine aquaculture is sited in areas with adequate water current to disperse sediments and dissolve particulate wastes to prevent the build-up of waste that	None are applicable. DTS/DPF 1.7 None are applicable. d Aquaculture DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 None are applicable.
Storage areas associated with aquaculture activity are integrated with the use of the land and sited and designed to minimise their visual impact on the surrounding environment. Marine Base PO 2.1 Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including: (a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems. PO 2.2 Marine aquaculture is sited in areas with adequate water current to disperse	None are applicable. d Aquaculture DTS/DPF 2.1 None are applicable. DTS/DPF 2.2
of the land and sited and designed to minimise their visual impact on the surrounding environment. Marine Base PO 2.1 Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including: (a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems. PO 2.2 Marine aquaculture is sited in areas with adequate water current to disperse	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2
PO 2.1 Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including: (a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems. PO 2.2 Marine aquaculture is sited in areas with adequate water current to disperse	DTS/DPF 2.1 None are applicable. DTS/DPF 2.2
Marine aquaculture is sited and designed to minimise its adverse impacts on sensitive ecological areas including: (a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems. PO 2.2 Marine aquaculture is sited in areas with adequate water current to disperse	None are applicable. DTS/DPF 2.2
sensitive ecological areas including: (a) creeks and estuaries (b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems. PO 2.2 Marine aquaculture is sited in areas with adequate water current to disperse	DTS/DPF 2.2
(b) wetlands (c) significant seagrass and mangrove communities (d) marine habitats and ecosystems. PO 2.2 Marine aquaculture is sited in areas with adequate water current to disperse	
Marine aquaculture is sited in areas with adequate water current to disperse	
1	None are applicable.
may cause environmental harm.	
PO 2.3	DTS/DPF 2.3
Marine aquaculture is designed to not involve discharge of human waste on the site, on any adjacent land or into nearby waters.	None are applicable.
PO 2.4	DTS/DPF 2.4
Marine aquaculture (other than inter-tidal aquaculture) is located an appropriate distance seaward of the high water mark.	Marine aquaculture development is located 100m or more seaward of the high water mark.
PO 2.5	DTS/DPF 2.5
Marine aquaculture is sited and designed to not obstruct or interfere with:	None are applicable.
(a) areas of high public use	
 (b) areas, including beaches, used for recreational activities such as swimming, fishing, skiing, sailing and other water sports (c) areas of outstanding visual or environmental value (d) areas of high tourism value (e) areas of important regional or state economic activity, including commercial ports, wharfs and jetties (f) the operation of infrastructure facilities including inlet and outlet pipes associated with the desalination of sea water. 	
PO 2.6 Marine aquaculture is sited and designed to minimise interference and obstruction to the natural processes of the coastal and marine environment.	DTS/DPF 2.6 None are applicable.
PO 2.7	DTS/DPF 2.7
Marine aquaculture is designed to be as unobtrusive as practicable by incorporating measures such as:	None are applicable.
(a) using feed hoppers painted in subdued colours and suspending them as close as possible to the surface of the water	
(b) positioning structures to protrude the minimum distance practicable above the surface of the water	
(c) avoiding the use of shelters and structures above cages and platforms unless necessary to exclude predators and protected species from interacting with the farming structures and/or stock inside the cages, or for safety reasons (d) positioning racks, floats and other farm structures in unobtrusive locations landward from the shoreline.	

Page 24 of 110 Printed on 11/08/2022

Policy24 - Enquiry		
PO 2.8	DTS/DPF 2.8	
Access, launching and maintenance facilities utilise existing established roads, tracks, ramps and paths to or from the sea where possible to minimise environmental and amenity impacts.	None are applicable.	
PO 2.9	DTS/DPF 2.9	
Access, launching and maintenance facilities are developed as common user facilities and are co-located where practicable to mitigate adverse impacts on coastal areas.	None are applicable.	
PO 2.10	DTS/DPF 2.10	
Marine aquaculture is sited to minimise potential impacts on, and to protect the integrity of, reserves under the <i>National Parks and Wildlife Act 1972</i> .	Marine aquaculture is located 1000m or more seaward of the boundary of any reserve under the <i>National Parks and Wildlife Act 1972</i> .	
PO 2.11	DTS/DPF 2.11	
Onshore storage, cooling and processing facilities do not impair the coastline and its visual amenity by:	None are applicable.	
being sited, designed, landscaped and of a scale to reduce the overall bulk and appearance of buildings and complement the coastal landscape making provision for appropriately sited and designed vehicular access arrangements, including using existing vehicular access		
arrangements as far as practicable (c) incorporating appropriate waste treatment and disposal.		
Navigation and Safety		
PO 3.1 Marine aquaculture sites are suitably marked to maintain navigational safety.	DTS/DPF 3.1 None are applicable.	
PO 3.2 Marine aquaculture is sited to provide adequate separation between farms for safe navigation.	DTS/DPF 3.2 None are applicable.	
Environmenta	I al Management	
PO 4.1	DTS/DPF 4.1	
Marine aquaculture is maintained to prevent hazards to people and wildlife, including breeding grounds and habitats of native marine mammals and terrestrial fauna, especially migratory species.	None are applicable.	
PO 4.2	DTS/DPF 4.2	
Marine aquaculture is designed to facilitate the relocation or removal of structures in the case of emergency such as oil spills, algal blooms and altered water flows.	None are applicable.	
PO 4.3	DTS/DPF 4.3	
Marine aquaculture provides for progressive or future reclamation of disturbed areas ahead of, or upon, decommissioning.	None are applicable.	
PO 4.4	DTS/DPF 4.4	
Aquaculture operations incorporate measures for the removal and disposal of litter, disused material, shells, debris, detritus, dead animals and animal waste to prevent pollution of waters, wetlands, or the nearby coastline.	None are applicable.	

Beverage Production in Rural Areas

Assessment Provisions (AP)

Page 25 of 110 Printed on 11/08/2022

DO 1

Desired Outcome Mitigation of potential amenity and environmental impacts of value-adding beverage production facilities such as wineries, distilleries, cideries

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Odour a	and Noise
PO 1.1	DTS/DPF 1.1
Beverage production activities are designed and sited to minimise odour impacts on rural amenity.	None are applicable.
PO 1.2	DTS/DPF 1.2
Beverage production activities are designed and sited to minimise noise impacts on sensitive receivers.	None are applicable.
PO 1.3	DTS/DPF 1.3
Fermentation, distillation, manufacturing, storage, packaging and bottling activities occur within enclosed buildings to improve the visual appearance within a locality and manage noise associated with these activities.	None are applicable.
PO 1.4	DTS/DPF 1.4
Breweries are designed to minimise odours emitted during boiling and fermentation stages of production.	Brew kettles are fitted with a vapour condenser.
PO 1.5	DTS/DPF 1.5
Beverage production solid wastes are stored in a manner that minimises odour impacts on sensitive receivers in other ownership.	Solid waste from beverage production is collected and stored in sealed containers and removed from the site within 48 hours.
Water	Quality
PO 2.1	DTS/DPF 2.1
Beverage production wastewater management systems (including wastewater irrigation) are set back from watercourses to minimise adverse impacts on water resources.	Wastewater management systems are set back 50m or more from the banks of watercourses and bores.
PO 2.2	DTS/DPF 2.2
The storage or disposal of chemicals or hazardous substances is undertaken in a manner to prevent pollution of water resources.	None are applicable.
PO 2.3	DTS/DPF 2.3
Stormwater runoff from areas that may cause contamination due to beverage production activities (including vehicle movements and machinery operations) is drained to an onsite stormwater treatment system to manage potential environmental impacts.	None are applicable.
PO 2.4	DTS/DPF 2.4
Stormwater runoff from areas unlikely to cause contamination by beverage production and associated activities (such as roof catchments and clean hard-paved surfaces) is diverted away from beverage production areas and wastewater management systems.	None are applicable.
Wastewat	er Irrigation

Page 26 of 110 Printed on 11/08/2022

PO 3.1	DTS/DPF 3.1
Beverage production wastewater irrigation systems are designed and located to not contaminate soil and surface and ground water resources or damage crops.	None are applicable.
PO 3.2	DTS/DPF 3.2
Beverage production wastewater irrigation systems are designed and located to minimise impact on amenity and avoid spray drift onto adjoining land.	Beverage production wastewater is not irrigated within 50m of any dwelling in other ownership.
PO 3.3	DTS/DPF 3.3
Beverage production wastewater is not irrigated onto areas that pose an undue risk to the environment or amenity such as:	None are applicable.
 (a) waterlogged areas (b) land within 50m of a creek, swamp or domestic or stock water bore (c) land subject to flooding (d) steeply sloping land 	
(e) rocky or highly permeable soil overlaying an unconfined aquifer.	

Bulk Handling and Storage Facilities

Assessment Provisions (AP)

Desired Outcome		
DO 1	Facilities for the bulk handling and storage of agricultural, mineral, petroleum, rock, ore or other similar commodities are designed to minimise adverse impacts on transport networks, the landscape and surrounding land uses.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting ar	nd Design
PO 1.1	DTS/DPF 1.1
Bulk handling and storage facilities are sited and designed to minimise risks of adverse air quality and noise impacts on sensitive receivers.	Facilities for the handling, storage and dispatch of commodities in bulk (excluding processing) meet the following minimum separation distances from sensitive receivers:
	(a) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals), where the handling of these materials into or from vessels does not exceed 100 tonnes per day: 300m or more from residential premises not associated with the facility
	(b) bulk handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility: 300m or more from residential premises not associated with the facility
	(c) bulk petroleum storage involving individual containers with a capacity up to 200 litres and a total on-site storage capacity not exceeding 1,000 cubic metres: 500m or more
	(d) coal handling with: a. capacity up to 1 tonne per day or a storage capacity up to 50 tonnes: 500m or more b. capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes: 1000m or more.

Page 27 of 110 Printed on 11/08/2022

1 Olioy24 - Enquiry		
Buffers and Landscaping		
PO 2.1	DTS/DPF 2.1	
Bulk handling and storage facilities incorporate a buffer area for the establishment of dense landscaping adjacent road frontages to enhance the appearance of land and buildings from public thoroughfares.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Bulk handling and storage facilities incorporate landscaping to assist with screening and dust filtration.	None are applicable.	
Access and Parking		
PO 3.1	DTS/DPF 3.1	
Roadways and vehicle parking areas associated with bulk handling and storage facilities are designed and surfaced to control dust emissions and prevent drag out of material from the site.	Roadways and vehicle parking areas are sealed with an all-weather surface.	
Slipways, Wharves and Pontoons		
PO 4.1	DTS/DPF 4.1	
Slipways, wharves and pontoons used for the handling of bulk materials (such as fuel, oil, catch, bait and the like) incorporate catchment devices to avoid the release of materials into adjacent waters.	None are applicable.	

Clearance from Overhead Powerlines

Assessment Provisions (AP)

Desired Outcome	
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied: (a) a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the <i>Electricity Act 1996</i> (b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design

Assessment Provisions (AP)

Desired Outcome	
DO 1	Development is:

Page 28 of 110 Printed on 11/08/2022

- (a) contextual by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributes to the character of the immediate area
- (b) durable fit for purpose, adaptable and long lasting
- (c) inclusive by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access, and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors
- (d) sustainable by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Deemed-to-Satisfy Criteria / Performance Outcome **Designated Performance Feature** All development External Appearance PO 1.1 DTS/DPF 1.1 Buildings reinforce corners through changes in setback, articulation, None are applicable. materials, colour and massing (including height, width, bulk, roof form and slope). PO 12 DTS/DPF 1.2 Where zero or minor setbacks are desirable, development provides shelter None are applicable. over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm. DTS/DPF 1.3 Building elevations facing the primary street (other than ancillary buildings) None are applicable. are designed and detailed to convey purpose, identify main access points and complement the streetscape. PO 1.4 DTS/DPF 1.4 Plant, exhaust and intake vents and other technical equipment is integrated Development does not incorporate any structures that protrude beyond the into the building design to minimise visibility from the public realm and roofline negative impacts on residential amenity by: positioning plant and equipment in unobtrusive locations viewed from public roads and spaces screening rooftop plant and equipment from view when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses DTS/DPF 1.5 The negative visual impact of outdoor storage, waste management, loading None are applicable. and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form) taking into account the form of development contemplated in the relevant zone. Safetv DTS/DPF 2.1 Development maximises opportunities for passive surveillance of the public None are applicable. realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2 2 DTS/DPF 2.2 Development is designed to differentiate public, communal and private areas. None are applicable. PO 2.3 DTS/DPF 2.3

Page 29 of 110 Printed on 11/08/2022

Policy24 - Enquiry	
Buildings are designed with safe, perceptible and direct access from public street frontages and vehicle parking areas.	None are applicable.
PO 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of	None are applicable.
residential buildings), and non-residential land uses at street level, maximise	
passive surveillance from the public realm to the inside of the building at night.	
Lands	caping
PO 3.1	DTS/DPF 3.1
Soft landscaping and tree planting is incorporated to:	None are applicable.
(a) minimise heat absorption and reflection	
(b) maximise shade and shelter	
(c) maximise stormwater infiltration	
(d) enhance the appearance of land and streetscapes (e) contribute to biodiversity.	
(e) contribute to biodiversity.	
PO 3.2	DTS/DPF 3.2
Soft landscaping and tree planting maximises the use of locally indigenous	None are applicable.
plant species, incorporates plant species best suited to current and future	
climate conditions and avoids pest plant and weed species.	
Environmenta	I Performance
PO 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.
PO 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate-responsive techniques and features such as	None are applicable.
building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	
Water Sens	itive Design
PO 5.1	DTS/DPF 5.1
Development is sited and designed to maintain natural hydrological systems without negatively impacting:	None are applicable.
the quantity and quality of surface water and groundwater the depth and directional flow of surface water and groundwater the quality and function of natural springs.	
On-site Waste Tr	eatment Systems
PO 6.1	DTS/DPF 6.1
Dedicated on-site effluent disposal areas do not include any areas to be used	Effluent disposal drainage areas do not:
for, or could be reasonably foreseen to be used for, private open space,	
driveways or car parking.	encroach within an area used as private open space or result in less private open space than that specified in Design Table 1 - Private Open Space

Page 30 of 110 Printed on 11/08/2022

	(b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.
Carparking	Appearance
PO 7.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on the streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	None are applicable.
PO 7.2	DTS/DPF 7.2
Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	None are applicable.
PO 7.3	DTS/DPF 7.3
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.
PO 7.4	DTS/DPF 7.4
Street level vehicle parking areas incorporate tree planting to provide shade and reduce solar heat absorption and reflection.	None are applicable.
PO 7.5	DTS/DPF 7.5
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	None are applicable.
PO 7.6	DTS/DPF 7.6
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
PO 7.7	DTS/DPF 7.7
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.
Earthworks at	nd sloping land
PO 8.1	DTS/DPF 8.1
Development, including any associated driveways and access tracks,	Development does not involve any of the following:
minimises the need for earthworks to limit disturbance to natural topography.	(a) excavation exceeding a vertical height of 1m
	(b) filling exceeding a vertical height of 1m
	(c) a total combined excavation and filling vertical height of 2m or more.
PO 8.2	DTS/DPF 8.2
Driveways and access tracks are designed and constructed to allow safe and convenient access on sloping land (with a gradient exceeding 1 in 8).	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):
	do not have a gradient exceeding 25% (1-in-4) at any point along the driveway are constructed with an all-weather trafficable surface.

Page 31 of 110 Printed on 11/08/2022

- Enquiry	
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
 (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. 	
(c) are designed to integrate with the natural topography of the land.	
PO 8.4	DTS/DPF 8.4
Development on sloping land (with a gradient exceeding 1 in 8) avoids the alteration of natural drainage lines and includes on-site drainage systems to minimise erosion.	None are applicable.
PO 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip nor increases the potential for landslip or land surface instability.	None are applicable.
Fences	and Walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls are of sufficient height to maintain privacy and security without unreasonably impacting the visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.
PO 9.2	DTS/DPF 9.2
Landscaping incorporated on the low side of retaining walls is visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.
Overlooking / Visual Privacy	(in building 3 storeys or less)
PO 10.1	DTS/DPF 10.1
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses.	Upper level windows facing side or rear boundaries shared with a residential allotment/site satisfy one of the following:
	(a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm
	(b) have sill heights greater than or equal to 1.5m above finished floor level
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.
PO 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies, terraces and decks to habitable rooms and private open space of adjoining residential uses.	One of the following is satisfied: (a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or
	(b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases
All Residentia	permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or
	permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases

Page 32 of 110 Printed on 11/08/2022

Policy24 - Enquiry	
PO 11.1	DTS/DPF 11.1
Dwellings incorporate windows along primary street frontages to encourage	Each dwelling with a frontage to a public street:
passive surveillance and make a positive contribution to the streetscape.	
	(a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m
	(b) has an aggregate window area of at least 2m ² facing the primary
	street.
PO 11.2	DTS/DPF 11.2
Dwellings incorporate entry doors within street frontages to address the street	Dwellings with a frontage to a public street have an entry door visible from the
and provide a legible entry point for visitors.	primary street boundary.
	ind amenity
PO 12.1	DTS/DPF 12.1
Living rooms have an external outlook to provide a high standard of amenity	A living room of a dwelling incorporates a window with an outlook towards the
for occupants.	street frontage or private open space, public open space, or waterfront areas.
PO 12.2	DTS/DPF 12.2
Bedrooms are separated or shielded from active communal recreation areas,	None are applicable.
common access areas and vehicle parking areas and access ways to mitigate	
noise and artificial light intrusion.	
Ancillary D	Development
PO 13.1	DTS/DPF 13.1
Residential ancillary buildings and structures are sited and designed to not	Ancillary buildings:
detract from the streetscape or appearance of buildings on the site or	(a) are ancillary to a dwelling erected on the same site
neighbouring properties.	(b) have a floor area not exceeding 60m2(c) are not constructed, added to or altered so that any part is situated:
	(i) in front of any part of the building line of the dwelling to
	which it is ancillary
	or (ii) within 900mm of a boundary of the allotment with a
	secondary street (if the land has boundaries on two or more
	roads)
	(d) in the case of a garage or carport, the garage or carport:
	(i) is set back at least 5.5m from the boundary of the primary street
	(ii) when facing a primary street or secondary street, has a total
	door / opening not exceeding:
	A. for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser
	B. for dwellings comprising two or more building levels
	at the building line fronting the same public street - 7m in width
	THI II WIGHT
	(a) if situated on a houndary (not being a houndary with a primary street
	(e) if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless:
	(i) a longer wall or structure exists on the adjacent site and is
	situated on the same allotment boundary and
	(ii) the proposed wall or structure will be built along the same
	length of boundary as the existing adjacent wall or structure to the same or lesser extent
	 if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the
	boundary will not exceed 45% of the length of that boundary
	(g) will not be located within 3m of any other wall along the same
	boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the
	proposed wall or structure
	(h) have a wall height or post height not exceeding 3m above natural ground level (and not including a gable end)

Page 33 of 110 Printed on 11/08/2022

(i)

ground level (and not including a gable end)

have a roof height where no part of the roof is more than 5m above

the natural ground level (j) if clad in sheet metal, is pre-colour treated or painted in a nonreflective colour (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less: a total area as determined by the following table: Minimum Dwelling site area (or in the case of residential flat building or group percentage of dwelling(s), average site area) (m²) site <150 10% 150-200 15% 201-450 20% >450 25% the amount of existing soft landscaping prior to the development occurring. PO 13.2 **DTS/DPF 13.2** Ancillary buildings and structures do not result in: Ancillary buildings and structures do not impede on-site functional less private open space than specified in Design in Urban Areas requirements such as private open space provision or car parking Table 1 - Private Open Space requirements and do not result in over-development of the site. (b) less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. PO 13.3 **DTS/DPF 13.3** Fixed plant and equipment in the form of pumps and/or filtration systems for a The pump and/or filtration system is ancillary to a dwelling erected on the swimming pool or spa is positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers. enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment located at least 12m from the nearest habitable room located on an adjoining allotment. Garage appearance PO 14.1 **DTS/DPF 14.1** Garaging is designed to not detract from the streetscape or appearance of a Garages and carports facing a street: dwelling are situated so that no part of the garage or carport is in front of any part of the building line of the dwelling (b) are set back at least 5.5m from the boundary of the primary street (c) have a garage door / opening not exceeding 7m in width have a garage door /opening width not exceeding 50% of the site frontage unless the dwelling has two or more building levels at the building line fronting the same public street. Massing DTS/DPF 15.1 PO 15 1 The visual mass of larger buildings is reduced when viewed from adjoining None are applicable allotments or public streets. Dwelling additions PO 16.1 DTS / DPF 16.1 Dwelling additions are sited and designed to not detract from the streetscape Dwelling additions: or amenity of adjoining properties and do not impede on-site functional are not constructed, added to or altered so that any part is situated requirements.

Page 34 of 110 Printed on 11/08/2022

closer to a public street

- (b) do not result in:
 - (i) excavation exceeding a vertical height of 1m
 - (ii) filling exceeding a vertical height of 1m
 - (iii) a total combined excavation and filling vertical height of 2m or more
 - (iv) less Private Open Space than specified in Design Table 1 Private Open Space
 - (v) less on-site parking than specified in Transport Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas
 - (vi) upper level windows facing side or rear boundaries unless:
 - they are permanently obscured to a height of 1.5m above finished floor level that is fixed or not capable of being opened more than 200mm or
 - have sill heights greater than or equal to 1.5m above finished floor level or
 - incorporate screening to a height of 1.5m above finished floor level
 - (Vii) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of:
 - 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land
 - 3. 1.7m above finished floor level in all other cases.

Private Open Space

PO 17.1

DTS/DPF 17.1

Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.

Private open space is provided in accordance with Design Table 1 - Private Open Space.

Water Sensitive Design

PO 18.1

DTS/DPF 18.1

Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.

Residential development creating a common driveway / access that services 5 or more dwellings achieves the following stormwater runoff outcomes:

- (a) 80 per cent reduction in average annual total suspended solids
- (b) 60 per cent reduction in average annual total phosphorus
- (c) 45 per cent reduction in average annual total nitrogen.

PO 18.2

DTS/DPF 18.2

Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.

Development creating a common driveway / access that services 5 or more dwellings:

- (a) maintains the pre-development peak flow rate from the site based upon a 0.35 runoff coefficient for the 18.1% AEP 30-minute storm and the stormwater runoff time to peak is not increased or
 - captures and retains the difference in pre-development runoff volume (based upon a 0.35 runoff coefficient) vs post development runoff volume from the site for an 18.1% AEP 30-minute storm; and
- (b) manages site generated stormwater runoff up to and including the 1% AEP flood event to avoid flooding of buildings.

Car parking, access and manoeuvrability

PO 19.1

DTS/DPF 19.1

Enclosed parking spaces are of a size and dimensions to be functional, accessible and convenient.

Residential car parking spaces enclosed by fencing, walls or other structures have the following internal dimensions (separate from any waste storage

Page 35 of 110 Printed on 11/08/2022

Policy24 - Eriquity	
	area): (a) single width car parking spaces: (i) a minimum length of 5.4m per space (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space.
PO 19.2	DTS/DPF 19.2
Uncovered parking spaces are of a size and dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m
PO 19.3	DTS/DPF 19.3
Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages, domestic waste collection and on-street parking.	Driveways and access points on sites with a frontage to a public road of 10m or less have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site.
PO 19.4	DTS/DPF 19.4
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed: (i) is set back 6m or more from the tangent point of an intersection of 2 or more roads (ii) is set back outside of the marked lines or infrastructure dedicating a pedestrian crossing (iii) does not involve the removal, relocation or damage to of mature street trees, street furniture or utility infrastructure services.
PO 19.5	DTS/DPF 19.5
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	(a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1:4 on average (b) they are aligned relative to the street boundary so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the street boundary (c) if located to provide access from an alley, lane or right of way - the alley, land or right or way is at least 6.2m wide along the boundary of the allotment / site
PO 19.6	DTS/DPF 19.6
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements:
	 (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly

Page 36 of 110 Printed on 11/08/2022

minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. Waste storage PO 20.1 DTS/DPF 20.1 Provision is made for the adequate and convenient storage of waste bins in a None are applicable. location screened from public view. Design of Transportable Dwellings PO 21.1 DTS/DPF 21.1 The sub-floor space beneath transportable buildings is enclosed to give the Buildings satisfy (a) or (b): appearance of a permanent structure. are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building. Group dwelling, residential flat buildings and battle-axe development Amenity PO 22.1 DTS/DPF 22.1 Dwellings are of a suitable size to accommodate a layout that is well organised Dwellings have a minimum internal floor area in accordance with the following and provides a high standard of amenity for occupants. **Number of bedrooms** Minimum internal floor area Studio 35m² 1 bedroom 50m² 2 bedroom 65m² 3+ bedrooms 80m² and any dwelling over 3 bedrooms provides an additional 15m² for every additional bedroom PO 22.2 DTS/DPF 22.2 The orientation and siting of buildings minimises impacts on the amenity, None are applicable. outlook and privacy of occupants and neighbours. PO 22.3 DTS/DPF 22.3 Development maximises the number of dwellings that face public open space None are applicable. and public streets and limits dwellings oriented towards adjoining properties. PO 22.4 DTS/DPF 22 4 Battle-axe development is appropriately sited and designed to respond to the Dwelling sites/allotments are not in the form of a battle-axe arrangement. existing neighbourhood context. Communal Open Space DTS/DPF 23.1 PO 23.1 Private open space provision may be substituted for communal open space None are applicable. which is designed and sited to meet the recreation and amenity needs of residents. PO 23.2 **DTS/DPF 23.2** Communal open space is of sufficient size and dimensions to cater for group Communal open space incorporates a minimum dimension of 5 metres. recreation.

Page 37 of 110 Printed on 11/08/2022

PO 23.3	DTS/DPF 23.3
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 23.4	DTS/DPF 23.4
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 23.5	DTS/DPF 23.5
Communal open space is designed and sited to:	None are applicable.
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings	
(b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Carparking, access	s and manoeuvrability
PO 24.1	DTS/DPF 24.1
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements:
	(a) minimum 0.33 on-street car parks per proposed dwellings (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located
	between two other parking spaces or to an end obstruction where the parking is indented.
PO 24.2	DTS/DPF 24.2
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.
PO 24.3	DTS/DPF 24.3
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site: (a) have a minimum width of 3m
	(b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.
PO 24.4	DTS/DPF 24.4
Residential driveways in a battle-axe configuration are designed to allow safe and convenient movement.	Where in a battle-axe configuration, a driveway servicing one dwelling has a minimum width of 3m.
PO 24.5	DTS/DPF 24.5
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre.
PO 24.6	DTS/DPF 24.6
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement

Page 38 of 110 Printed on 11/08/2022

Policy24 - Enquiry	
	and manoeuvring of vehicles.
Soft Lan	dscaping
PO 25.1	DTS/DPF 25.1
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or a building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.
PO 25.2	DTS/DPF 25.2
Soft landscaping is provided that improves the appearance of common driveways.	Where a common driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Site Facilities /	Waste Storage
PO 26.1	DTS/DPF 26.1
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
PO 26.2	DTS/DPF 26.2
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 26.3	DTS/DPF 26.3
Provision is made for suitable household waste and recyclable material storage facilities which are: (a) located away, or screened, from public view, and	None are applicable.
(b) conveniently located in proximity to dwellings and the waste collection point.	
PO 26.4	DTS/DPF 26.4
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 26.5	DTS/DPF 26.5
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.
PO 26.6	DTS/DPF 26.6
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.
Supported accommodation	on and retirement facilities
Siting and C	Configuration
PO 27.1	DTS/DPF 27.1
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.
Movement	and Access
PO 28.1	DTS/DPF 28.1
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.
 (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places 	

Page 39 of 110 Printed on 11/08/2022

(c) car parks with gradients no steeper than 1-in-40 and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points.	
Communal	Open Space
PO 29.1	DTS/DPF 29.1
Development is designed to provide attractive, convenient and comfortable indoor and outdoor communal areas to be used by residents and visitors.	None are applicable.
PO 29.2	DTS/DPF 29.2
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 29.3	DTS/DPF 29.3
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 29.4	DTS/DPF 29.4
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services(b) have regard to acoustic, safety, security and wind effects.	
PO 29.5	DTS/DPF 29.5
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 29.6	DTS/DPF 29.6
Communal open space is designed and sited to:	None are applicable.
 (a) in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings (b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance. 	
Site Facilities	/ Waste Storage
PO 30.1	DTS/DPF 30.1
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric powered vehicles.	None are applicable.
PO 30.2	DTS/DPF 30.2
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.
PO 30.3	DTS/DPF 28.3
Provision is made for suitable external clothes drying facilities.	None are applicable.
PO 30.4	DTS/DPF 30.4
Provision is made for suitable household waste and recyclable material storage facilities conveniently located and screened from public view.	None are applicable.
PO 30.5	DTS/DPF 30.5
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
PO 30.6	DTS/DPF 30.6

Page 40 of 110 Printed on 11/08/2022

Policy2	Policy24 - Enquiry		
	on is made for on-site waste collection where 10 or more bins are to be ed at any one time.	None are applicable.	
PO 30.7		DTS/DPF 30.7	
	es including gas and water meters are conveniently located and ed from public view.	None are applicable.	
	All non-residen	ial development	
	Water Sen:	sitive Design	
PO 31.1		DTS/DPF 31.1	
Development likely to result in significant risk of export of litter, oil or grease includes stormwater management systems designed to minimise pollutants entering stormwater.		None are applicable.	
PO 31.2		DTS/DPF 31.2	
	discharged from a development site is of a physical, chemical and cal condition equivalent to or better than its pre-developed state.	None are applicable.	
	Wash-down and Waste	Loading and Unloading	
PO 32.1	Wash-down and Waste	Loading and Unloading DTS/DPF 32.1	
Areas f	for activities including loading and unloading, storage of waste refuse		
Areas f		DTS/DPF 32.1	
Areas f	for activities including loading and unloading, storage of waste refuse commercial and industrial development or wash-down areas used for	DTS/DPF 32.1	
Areas f bins in the clea	for activities including loading and unloading, storage of waste refuse commercial and industrial development or wash-down areas used for aning of vehicles, vessels, plant or equipment are: designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface	DTS/DPF 32.1	
Areas f bins in the clea (a)	for activities including loading and unloading, storage of waste refuse commercial and industrial development or wash-down areas used for aning of vehicles, vessels, plant or equipment are: designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off	DTS/DPF 32.1	
Areas f bins in the clea (a)	for activities including loading and unloading, storage of waste refuse commercial and industrial development or wash-down areas used for aning of vehicles, vessels, plant or equipment are: designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off paved with an impervious material to facilitate wastewater collection of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater	DTS/DPF 32.1	
Areas f bins in the clear (a)	for activities including loading and unloading, storage of waste refuse commercial and industrial development or wash-down areas used for aning of vehicles, vessels, plant or equipment are: designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off paved with an impervious material to facilitate wastewater collection of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area	DTS/DPF 32.1	

Table 1 - Private Open Space

Dwelling Type	Minimum Rate
Dwelling (at ground level)	Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.
Dwelling (above ground level)	Studio (no separate bedroom): 4m² with a minimum dimension 1.8m One bedroom: 8m² with a minimum dimension 2.1m Two bedroom dwelling: 11m² with a minimum dimension 2.4m Three + bedroom dwelling: 15m² with a minimum dimension 2.6m
Cabin or caravan (permanently fixed to the ground) in a residential park or a caravan and tourist park	Total area: 16m ² , which may be used as second car parking space, provided on each site intended for residential occupation.

Page 41 of 110 Printed on 11/08/2022

Design in Urban Areas

Assessment Provisions (AP)

	Desired Outcome			
D	O 1	Development is:		
		(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality	
		(b)	durable - fit for purpose, adaptable and long lasting	
		(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors	
		(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.	

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
All Dev	elopment
External A	Appearance
PO 1.1	DTS/DPF 1.1
Buildings reinforce corners through changes in setback, articulation, materials, colour and massing (including height, width, bulk, roof form and slope).	None are applicable.
PO 1.2	DTS/DPF 1.2
Where zero or minor setbacks are desirable, development provides shelter over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm.	None are applicable.
PO 1.3	DTS/DPF 1.3
Building elevations facing the primary street (other than ancillary buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Plant, exhaust and intake vents and other technical equipment are integrated into the building design to minimise visibility from the public realm and negative impacts on residential amenity by:	Development does not incorporate any structures that protrude beyond the roofline.
positioning plant and equipment discretely, in unobtrusive locations as viewed from public roads and spaces	
(b) screening rooftop plant and equipment from view	
(c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses.	
PO 1.5	DTS/DPF 1.5
The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone.	None are applicable.

Page 42 of 110 Printed on 11/08/2022

Sa	fety
PO 2.1	DTS/DPF 2.1
Development maximises opportunities for passive surveillance of the public	None are applicable.
realm by providing clear lines of sight, appropriate lighting and the use of	попе аге аррисавте.
visually permeable screening wherever practicable.	
Pogg	DTG/DDF 0.0
PO 2.2	DTS/DPF 2.2
Development is designed to differentiate public, communal and private areas.	None are applicable.
PO 2.3	DTS/DPF 2.3
Buildings are designed with safe, perceptible and direct access from public	None are applicable.
street frontages and vehicle parking areas.	
PO 2.4	DTS/DPF 2.4
Development at street level is designed to maximise opportunities for passive surveillance of the adjacent public realm.	None are applicable.
Surveillance of the adjacent public reality.	
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of	None are applicable.
residential buildings) and non-residential land uses at street level, maximise	
passive surveillance from the public realm to the inside of the building at night.	
Lands	scaping
PO 3.1	DTS/DPF 3.1
Soft landscaping and tree planting are incorporated to:	None are applicable.
(a) minimise heat absorption and reflection	
(b) maximise shade and shelter (c) maximise stormwater infiltration	
(d) enhance the appearance of land and streetscapes.	
Environmenta	al Performance
PO 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access	None are applicable.
and ventilation to main activity areas, habitable rooms, common areas and open spaces.	
орен эрассэ.	
PO 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental	None are applicable.
performance and minimise energy consumption and reliance on mechanical	
systems, such as heating and cooling.	
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate responsive techniques and features such as	None are applicable.
building and window orientation, use of eaves, verandahs and shading	
structures, water harvesting, at ground landscaping, green walls, green roofs	
and photovoltaic cells.	
Water Sens	sitive Design
PO 5.1	DTS/DPF 5.1
Development is sited and designed to maintain natural hydrological systems	None are applicable.
without negatively impacting:	
(a) the quantity and quality of surface water and groundwater	
(b) the depth and directional flow of surface water and groundwater	
(c) the quality and function of natural springs.	
On-site Waste Tr	reatment Systems
B0.04	
PO 6.1	DTS/DPF 6.1

Page 43 of 110 Printed on 11/08/2022

Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	(a) encroach within an area used as private open space or result in less private open space than that specified in Design in Urban Areas Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.
PO 7.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	None are applicable.
PO 7.2	DTS/DPF 7.2
Vehicle parking areas appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced and the like.	None are applicable.
PO 7.3	DTS/DPF 7.3
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.
PO 7.4	DTS/DPF 7.4
Street-level vehicle parking areas incorporate tree planting to provide shade, reduce solar heat absorption and reflection.	Vehicle parking areas that are open to the sky and comprise 10 or more car parking spaces include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking spaces provided and a landscaped strip on any road frontage of a minimum dimension of 1m.
PO 7.5	DTS/DPF 7.5
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	Vehicle parking areas comprising 10 or more car parking spaces include soft landscaping with a minimum dimension of: (a) 1m along all public road frontages and allotment boundaries (b) 1m between double rows of car parking spaces.
PO 7.6	DTS/DPF 7.6
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.
PO 7.7	DTS/DPF 7.7
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.
Earthworks a	nd sloping land
PO 8.1	DTS/DPF 8.1
Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2	Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more.

Page 44 of 110 Printed on 11/08/2022

Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b):
	(a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway
	(b) are constructed with an all-weather trafficable surface.
PO 8.3	DTS/DPF 8.3
Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8):	None are applicable.
 (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land. 	
DO 84	DTC/DDF 9.4
PO 8.4 Development on sloping land (with a gradient exceeding 1 in 8) avoids the	DTS/DPF 8.4 None are applicable.
alteration of natural drainage lines and includes on site drainage systems to minimise erosion.	попс агс аррисамс.
PO 8.5	DTS/DPF 8.5
Development does not occur on land at risk of landslip or increase the potential for landslip or land surface instability.	None are applicable.
Fences	s and walls
PO 9.1	DTS/DPF 9.1
Fences, walls and retaining walls of sufficient height maintain privacy and security without unreasonably impacting visual amenity and adjoining land's access to sunlight or the amenity of public places.	None are applicable.
PO 9.2	DTS/DPF 9.2
Landscaping is incorporated on the low side of retaining walls that are visible from public roads and public open space to minimise visual impacts.	A vegetated landscaped strip 1m wide or more is provided against the low side of a retaining wall.
Overlooking / Visual P	rivacy (low rise buildings)
PO 10.1	DTS/DPF 10.1
Development mitigates direct overlooking from upper level windows to habitable rooms and private open spaces of adjoining residential uses in	Upper level windows facing side or rear boundaries shared with a residential use in a neighbourhood-type zone:
neighbourhood-type zones.	(a) are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 125mm
	(b) have sill heights greater than or equal to 1.5m above finished floor level
	(c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level.
PO 10.2	DTS/DPF 10.2
Development mitigates direct overlooking from balconies to habitable rooms and private open space of adjoining residential uses in neighbourhood type	One of the following is satisfied:
zones.	(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace
	or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or
	(ii) 1.7m above finished floor level in all other cases

Page 45 of 110 Printed on 11/08/2022

	ding law sing registeration developments
	ding low rise residential development)
PO 11.1 Development provides a dedicated area for on-site collection and sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection.	DTS/DPF 11.1 None are applicable.
PO 11.2 Communal waste storage and collection areas are located, enclosed and designed to be screened from view from the public domain, open space and dwellings.	DTS/DPF 11.2 None are applicable.
PO 11.3 Communal waste storage and collection areas are designed to be well ventilated and located away from habitable rooms.	DTS/DPF 11.3 None are applicable.
PO 11.4 Communal waste storage and collection areas are designed to allow waste and recycling collection vehicles to enter and leave the site without reversing.	DTS/DPF 11.4 None are applicable.
PO 11.5 For mixed use developments, non-residential waste and recycling storage areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate.	DTS/DPF 11.5 None are applicable.
	ledium and High Rise
	Appearance
Buildings positively contribute to the character of the local area by responding to local context.	DTS/DPF 12.1 None are applicable.
PO 12.2	DTS/DPF 12.2
Architectural detail at street level and a mixture of materials at lower building levels near the public interface are provided to reinforce a human scale.	None are applicable.
PO 12.3	DTS/DPF 12.3
Buildings are designed to reduce visual mass by breaking up building elevations into distinct elements.	None are applicable.
PO 12.4	DTS/DPF 12.4
Boundary walls visible from public land include visually interesting treatments to break up large blank elevations.	None are applicable.
PO 12.5	DTS/DPF 12.5
External materials and finishes are durable and age well to minimise ongoing maintenance requirements.	Buildings utilise a combination of the following external materials and finishes: (a) masonry (b) natural stone (c) pre-finished materials that minimise staining, discolouring or deterioration.
PO 12.6	DTS/DPF 12.6
Street-facing building elevations are designed to provide attractive, high quality and pedestrian-friendly street frontages.	Building street frontages incorporate: (a) active uses such as shops or offices (b) prominent entry areas for multi-storey buildings (where it is a common entry) (c) habitable rooms of dwellings (d) areas of communal public realm with public art or the like, where consistent with the zone and/or subzone provisions.
PO 12.7	DTS/DPF 12.7
Entrances to multi-storey buildings are safe, attractive, welcoming, functional and contribute to streetscape character.	Entrances to multi-storey buildings are: (a) oriented towards the street

Page 46 of 110 Printed on 11/08/2022

(b) clearly visible and easily identifiable from the street and vehicle parking areas (c) designed to be prominent, accentuated and a welcoming feature if there are no active or occupied ground floor uses (d) designed to provide shelter, a sense of personal address and transitional space around the entry (e) located as close as practicable to the lift and / or lobby access to minimise the need for long access corridors (f) designed to avoid the creation of potential areas of entrapment. PO 12.8 DTS/DPF 12.8 Building services, plant and mechanical equipment are screened from the None are applicable. public realm. Landscaping PO 13.1 DTS/DPF 13.1 Development facing a street provides a well landscaped area that contains a Buildings provide a 4m by 4m deep soil space in front of the building that deep soil space to accommodate a tree of a species and size adequate to accommodates a medium to large tree, except where no building setback from provide shade, contribute to tree canopy targets and soften the appearance of front property boundaries is desired. buildings. PO 13.2 DTS/DPF 13.2 Deep soil zones are provided to retain existing vegetation or provide areas that Multi-storey development provides deep soil zones and incorporates trees at can accommodate new deep root vegetation, including tall trees with large not less than the following rates, except in a location or zone where full site canopies to provide shade and soften the appearance of multi-storey coverage is desired. buildings. Site area Minimum deep Minimum Tree / deep soil soil area dimension zones <300 m² 10 m² 1.5m 1 small tree / 10 m^2 300-1500 m² 7% site area 3m 1 medium tree / $30 \, \text{m}^2$ >1500 m² 7% site area 6m 1 large or medium tree / 60 m^2 Tree size and site area definitions Small tree 4-6m mature height and 2-4m canopy spread Medium tree 6-12m mature height and 4-8m canopy spread Large tree 12m mature height and >8m canopy spread Site area The total area for development site, not average area per dwelling PO 13.3 DTS/DPF 13.3 Deep soil zones with access to natural light are provided to assist in None are applicable. maintaining vegetation health. PO 13.4 DTS/DPF 13.4 Unless separated by a public road or reserve, development sites adjacent to Building elements of 3 or more building levels in height are set back at least 6m from a zone boundary in which a deep soil zone area is incorporated. any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in

Page 47 of 110 Printed on 11/08/2022

screening new buildings of 3 or more building levels in height.		
screening new buildings of 3 of more building levels in height.		
Environmental		
PO 14.1	DTS/DPF 14.1	
Development minimises detrimental micro-climatic impacts on adjacent land and buildings.	None are applicable.	
PO 14.2	DTS/DPF 14.2	
Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells.	None are applicable.	
PO 14.3	DTS/DPF 14.3	
Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as:	None are applicable.	
 (a) a podium at the base of a tall tower and aligned with the street to deflect wind away from the street (b) substantial verandahs around a building to deflect downward travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level (d) avoiding tall shear elevations that create windy conditions at street level. 		
Car F	Parking	
PO 15.1	DTS/DPF 15.1	
Multi-level vehicle parking structures are designed to contribute to active street frontages and complement neighbouring buildings.	Multi-level vehicle parking structures within buildings:	
PO 15.2	DTS/DPF 15.2	
Multi-level vehicle parking structures within buildings complement the surrounding built form in terms of height, massing and scale.	None are applicable.	
Overlooking/	Visual Privacy	
PO 16.1	DTS/DPF 16.1	
Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as:	None are applicable.	
 (a) appropriate site layout and building orientation (b) off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight (c) building setbacks from boundaries (including building boundary to boundary where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms (d) screening devices that are integrated into the building design and have minimal negative effect on residents' or neighbours' amenity. 		
All residentia	I development	
Front elevations and passive surveillance		
PO 17.1	DTS/DPF 17.1	

Page 48 of 110 Printed on 11/08/2022

Dwellings incorporate windows facing primary street frontages to encourage Each dwelling with a frontage to a public street: passive surveillance and make a positive contribution to the streetscape. includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary PO 17.2 **DTS/DPF 17.2** Dwellings incorporate entry doors within street frontages to address the street Dwellings with a frontage to a public street have an entry door visible from the and provide a legible entry point for visitors. primary street boundary. Outlook and Amenity PO 18.1 DTS/DPF 18.1 Living rooms have an external outlook to provide a high standard of amenity A living room of a dwelling incorporates a window with an external outlook of for occupants. the street frontage, private open space, public open space, or waterfront PO 18.2 DTS/DPF 18.2 Bedrooms are separated or shielded from active communal recreation areas, None are applicable. common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion. **Ancillary Development** PO 19 1 DTS/DPF 19.1 Ancillary buildings: Residential ancillary buildings are sited and designed to not detract from the are ancillary to a dwelling erected on the same site (a) streetscape or appearance of primary residential buildings on the site or (b) have a floor area not exceeding 60m2 neighbouring properties. (c) are not constructed, added to or altered so that any part is situated: in front of any part of the building line of the dwelling to which it is ancillary (ii) within 900mm of a boundary of the allotment with a secondary street (if the land has boundaries on two or more roads) (d) in the case of a garage or carport, the garage or carport: is set back at least 5.5m from the boundary of the primary street when facing a primary street or secondary street, has a total door / opening not exceeding: for dwellings of single building level - 7m in width or 50% of the site frontage, whichever is the lesser for dwellings comprising two or more building levels at the building line fronting the same public street -7m in width if situated on a boundary (not being a boundary with a primary street or secondary street), do not exceed a length of 11.5m unless: a longer wall or structure exists on the adjacent site and is situated on the same allotment boundary the proposed wall or structure will be built along the same length of boundary as the existing adjacent wall or structure to the same or lesser extent (f) if situated on a boundary of the allotment (not being a boundary with a primary street or secondary street), all walls or structures on the boundary will not exceed 45% of the length of that boundary will not be located within 3m of any other wall along the same boundary unless on an adjacent site on that boundary there is an existing wall of a building that would be adjacent to or about the proposed wall or structure

Page 49 of 110 Printed on 11/08/2022

(h)

(i)

have a wall height or post height not exceeding 3m above natural

have a roof height where no part of the roof is more than 5m above

ground level (and not including a gable end)

the natural ground level if clad in sheet metal, is pre-colour treated or painted in a nonreflective colour (k) retains a total area of soft landscaping in accordance with (i) or (ii), whichever is less: a total area as determined by the following table: Dwelling site area (or in the case of **Minimum** residential flat building or group percentage of site dwelling(s), average site area) (m²) <150 10% 150-200 15% 201-450 20% >450 25% the amount of existing soft landscaping prior to the development occurring. DTS/DPF 19.2 PO 19.2 Ancillary buildings and structures do not impede on-site functional Ancillary buildings and structures do not result in: requirements such as private open space provision, car parking requirements less private open space than specified in Design in Urban Areas or result in over-development of the site. Table 1 - Private Open Space less on-site car parking than specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas. PO 19 3 **DTS/DPF 19 3** Fixed plant and equipment in the form of pumps and/or filtration systems for a The pump and/or filtration system is ancillary to a dwelling erected on the swimming pool or spa positioned and/or housed to not cause unreasonable same site and is: noise nuisance to adjacent sensitive receivers. enclosed in a solid acoustic structure that is located at least 5m from the nearest habitable room located on an adjoining allotment (b) located at least 12m from the nearest habitable room located on an adjoining allotment. Residential Development - Low Rise External appearance PO 20.1 DTS/DPF 20.1 Garaging is designed to not detract from the streetscape or appearance of a Garages and carports facing a street: dwelling. are situated so that no part of the garage or carport will be in front of any part of the building line of the dwelling (b) are set back at least 5.5m from the boundary of the primary street (c) have a garage door / opening width not exceeding 7m have a garage door / opening width not exceeding 50% of the site (d) frontage unless the dwelling has two or more building levels at the building line fronting the same public street. PO 20.2 DTS/DPF 20.2

Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and the appearance of common driveway areas.

Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway:

- (a) a minimum of 30% of the building wall is set back an additional 300mm from the building line
- (b) a porch or portico projects at least 1m from the building wall

Page 50 of 110 Printed on 11/08/2022

a balcony projects from the building wall (d) a verandah projects at least 1m from the building wall (e) eaves of a minimum 400mm width extend along the width of the front elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm a minimum of two different materials or finishes are incorporated on (g) the walls of the front building elevation, with a maximum of 80% of the building elevation in a single material or finish. PO 20.3 DTS/DPF 20.3 The visual mass of larger buildings is reduced when viewed from adjoining None are applicable allotments or public streets. Private Open Space DTS/DPF 21 1 PO 21.1 Dwellings are provided with suitable sized areas of usable private open space Private open space is provided in accordance with Design in Urban Areas to meet the needs of occupants. Table 1 - Private Open Space. DTS/DPF 21.2 Private open space is positioned to provide convenient access from internal Private open space is directly accessible from a habitable room. living areas. Landscaping PO 22.1 DTS/DPF 22.1 Soft landscaping is incorporated into development to: Residential development incorporates soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b): (a) minimise heat absorption and reflection (b) contribute shade and shelter a total area as determined by the following table: (c) provide for stormwater infiltration and biodiversity (d) enhance the appearance of land and streetscapes. Dwelling site area (or in the case of Minimum residential flat building or group percentage of site dwelling(s), average site area) (m²) <150 10% 150-200 15% >200-450 20% >450 25% (b) at least 30% of any land between the primary street boundary and the primary building line. Car parking, access and manoeuvrability PO 23.1 **DTS/DPF 23.1** Enclosed car parking spaces are of dimensions to be functional, accessible Residential car parking spaces enclosed by fencing, walls or other structures and convenient. have the following internal dimensions (separate from any waste storage area): (a) single width car parking spaces: (i) a minimum length of 5.4m per space a minimum width of 3.0m (iii) a minimum garage door width of 2.4m

Page 51 of 110 Printed on 11/08/2022

	(b) double width car parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.4m (iii) minimum garage door width of 2.4m per space.	
PO 23.2	DTS/DPF 23.2	
Uncovered car parking space are of dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.	
PO 23.3	DTS/DPF 23.3	
Driveways and access points are located and designed to facilitate safe access and egress while maximising land available for street tree planting, domestic waste collection, landscaped street frontages and on-street parking.	Driveways and access points satisfy (a) or (b): (a) sites with a frontage to a public road of 10m or less, have a width between 3.0 and 3.2 metres measured at the property boundary and are the only access point provided on the site (b) sites with a frontage to a public road greater than 10m: (i) have a maximum width of 5m measured at the property boundary and are the only access point provided on the site; (ii) have a width between 3.0 metres and 3.2 metres measured at the property boundary and no more than two access points are provided on site, separated by no less than 1m.	
PO 23.4	DTS/DPF 23.4	
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	
PO 23.5	DTS/DPF 23.5	
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	Driveways are designed and sited so that: (a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not steeper than 1-in-4 on average (b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary. (c) if located so as to provide access from an alley, lane or right of way the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site	
PO 23.6	DTS/DPF 23.6	
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements:	

Page 52 of 110 Printed on 11/08/2022

Waste PO 24.1 Provision is made for the convenient storage of waste bins in a location screened from public view.	 (a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly (c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented. storage DTS/DPF 24.1 Where dwellings abut both side boundaries a waste bin storage area is provided behind the building line of each dwelling that: (a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space); and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street. 	
Design of Trans	portable Buildings	
PO 25.1	DTS/DPF 25.1 Ruildings satisfy (a) or (b):	
The sub-floor space beneath transportable buildings is enclosed to give the appearance of a permanent structure.	Buildings satisfy (a) or (b): (a) are not transportable (b) the sub-floor space between the building and ground level is clad in a material and finish consistent with the building.	
Residential Development - Medium and	High Rise (including serviced apartments)	
Outlook and	Visual Privacy	
PO 26.1	DTS/DPF 26.1	
Ground level dwellings have a satisfactory short range visual outlook to public, communal or private open space.	Buildings: (a) provide a habitable room at ground or first level with a window facing toward the street (b) limit the height / extent of solid walls or fences facing the street to 1.2m high above the footpath level or, where higher, to 50% of the site frontage.	
PO 26.2	DTS/DPF 26.2	
The visual privacy of ground level dwellings within multi-level buildings is protected.	The finished floor level of ground level dwellings in multi-storey developments is raised by up to 1.2m.	
Private O	pen Space	
PO 27.1	DTS/DPF 27.1	
Dwellings are provided with suitable sized areas of usable private open space to meet the needs of occupants.	Private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space.	
Residential amenity	n multi-level buildings	
PO 28.1	DTS/DPF 28.1	
Residential accommodation within multi-level buildings have habitable rooms, windows and balconies designed and positioned to be separated from those of other dwellings and accommodation to provide visual and acoustic privacy and allow for natural ventilation and the infiltration of daylight into interior and outdoor spaces.		
PO 28.2	DTS/DPF 28.2	
Balconies are designed, positioned and integrated into the overall architectural form and detail of the development to:		
(a) respond to daylight, wind, and acoustic conditions to maximise	(a) sun screens (b) pergolas	

Page 53 of 110 Printed on 11/08/2022

Policy24 - Enquiry		
comfort and provide visual privacy (b) allow views and casual surveillance of the street while providing for safety and visual privacy of nearby living spaces and private outdoor areas.	(c) louvres (d) green facades (e) openable walls.	
PO 28.3	DTS/DPF 28.3	
Balconies are of sufficient size and depth to accommodate outdoor seating and promote indoor / outdoor living.	Balconies open directly from a habitable room and incorporate a minimum dimension of 2m.	
PO 28.4	DTS/DPF 28.4	
Dwellings are provided with sufficient space for storage to meet likely occupant needs.	Dwellings (not including student accommodation or serviced apartments) are provided with storage at the following rates with at least 50% or more of the storage volume to be provided within the dwelling:	
	(a) studio: not less than 6m ³	
	(b) 1 bedroom dwelling / apartment: not less than 8m ³	
	(c) 2 bedroom dwelling / apartment: not less than 10m ³	
	(d) 3+ bedroom dwelling / apartment: not less than 12m ³ .	
PO 28.5	DTS/DPF 28.5	
Dwellings that use light wells for access to daylight, outlook and ventilation for	Light wells:	
habitable rooms, are designed to ensure a reasonable living amenity is provided.	(a) are not used as the primary source of outlook for living rooms (b) up to 18m in height have a minimum horizontal dimension of 3m, or 6m if overlooked by bedrooms	
	(c) above 18m in height have a minimum horizontal dimension of 6m, or 9m if overlooked by bedrooms.	
PO 28.6	DTS/DPF 28.6	
Attached or abutting dwellings are designed to minimise the transmission of sound between dwellings and, in particular, to protect bedrooms from possible noise intrusions.	None are applicable.	
PO 28.7	DTS/DPF 28.7	
Dwellings are designed so that internal structural columns correspond with the position of internal walls to ensure that the space within the dwelling/apartment is useable.		
Dwelling (Configuration	
PO 29.1	DTS/DPF 29.1	
Buildings containing in excess of 10 dwellings provide a variety of dwelling sizes and a range in the number of bedrooms per dwelling to contribute to housing diversity.	Buildings containing in excess of 10 dwellings provide at least one of each of the following:	
	(a) studio (where there is no separate bedroom)	
	(b) 1 bedroom dwelling / apartment with a floor area of at least 50m ²	
	(c) 2 bedroom dwelling / apartment with a floor area of at least 65m ²	
	(d) 3+ bedroom dwelling / apartment with a floor area of at least 80m ² , and any dwelling over 3 bedrooms provides an additional 15m ² for every additional bedroom.	
PO 29.2	DTS/DPF 29.2	
Dwellings located on the ground floor of multi-level buildings with 3 or more bedrooms have the windows of their habitable rooms overlooking internal courtyard space or other public space, where possible.	None are applicable.	
Comm	on Areas	
PO 30.1	DTS/DPF 30.1	
The size of lifts, lobbies and corridors is sufficient to accommodate movement of bicycles, strollers, mobility aids and visitor waiting areas.	Common corridor or circulation areas:	
	(a) have a minimum ceiling height of 2.7m (b) provide access to no more than 8 dwellings (c) incorporate a wider section at apartment entries where the corridors	

Page 54 of 110 Printed on 11/08/2022

exceed 12m in length from a core. Group Dwellings, Residential Flat Buildings and Battle axe Development Amenity PO 31.1 **DTS/DPF 31.1** Dwellings are of a suitable size to provide a high standard of amenity for Dwellings have a minimum internal floor area in accordance with the following occupants. **Number of bedrooms** Minimum internal floor area Studio 35m² 1 bedroom 50m² 2 bedroom 65m² 3+ bedrooms 80m² and any dwelling over 3 bedrooms provides an additional 15m² for every additional bedroom PO 31.2 DTS/DPF 31.2 The orientation and siting of buildings minimises impacts on the amenity, None are applicable. outlook and privacy of occupants and neighbours. DTS/DPF 31.3 Development maximises the number of dwellings that face public open space None are applicable. and public streets and limits dwellings oriented towards adjoining properties. PO 31.4 DTS/DPF 31.4 Battle-axe development is appropriately sited and designed to respond to the Dwelling sites/allotments are not in the form of a battle-axe arrangement. existing neighbourhood context. Communal Open Space PO 32.1 DTS/DPF 32.1 Private open space provision may be substituted for communal open space None are applicable. which is designed and sited to meet the recreation and amenity needs of residents. PO 32.2 DTS/DPF 32.2 Communal open space is of sufficient size and dimensions to cater for group Communal open space incorporates a minimum dimension of 5 metres. recreation. PO 32.3 DTS/DPF 32 3 None are applicable. Communal open space is designed and sited to: be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects. PO 32.4 **DTS/DPF 32.4** Communal open space contains landscaping and facilities that are functional, None are applicable. attractive and encourage recreational use. PO 32.5 DTS/DPF 32.5 None are applicable. Communal open space is designed and sited to: in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings (b) in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance. Car parking, access and manoeuvrability

Page 55 of 110 Printed on 11/08/2022

- Charles - Char		
PO 33.1	DTS/DPF 33.1	
Driveways and access points are designed and distributed to optimise the provision of on-street visitor parking.	Where on-street parking is available directly adjacent the site, on-street parking is retained adjacent the subject site in accordance with the following requirements: (a) minimum 0.33 on-street car parks per proposed dwelling (rounded up to the nearest whole number) (b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly	
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.	
PO 33.2	DTS/DPF 33.2	
The number of vehicular access points onto public roads is minimised to reduce interruption of the footpath and positively contribute to public safety and walkability.	Access to group dwellings or dwellings within a residential flat building is provided via a single common driveway.	
PO 33.3	DTS/DPF 33.3	
Residential driveways that service more than one dwelling are designed to allow safe and convenient movement.	Driveways that service more than 1 dwelling or a dwelling on a battle-axe site: (a) have a minimum width of 3m (b) for driveways servicing more than 3 dwellings: (i) have a width of 5.5m or more and a length of 6m or more at the kerb of the primary street (ii) where the driveway length exceeds 30m, incorporate a passing point at least every 30 metres with a minimum width of 5.5m and a minimum length of 6m.	
PO 33.4	DTS/DPF 33.4	
Residential driveways that service more than one dwelling or a dwelling on a battle-axe site are designed to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages of parking spaces in no more than a three-point turn manoeuvre.	
PO 33.5	DTS/DPF 33.5	
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.	
Soft lan	ndscaping	
PO 34.1	DTS/DPF 34.1	
Soft landscaping is provided between dwellings and common driveways to improve the outlook for occupants and appearance of common areas.	Other than where located directly in front of a garage or building entry, soft landscaping with a minimum dimension of 1m is provided between a dwelling and common driveway.	
PO 34.2	DTS/DPF 34.2	
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	Battle-axe or common driveways satisfy (a) and (b): (a) are constructed of a minimum of 50% permeable or porous material (b) where the driveway is lessted directly adjacent the side or rear	
	(b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).	
Site Facilities	/ Waste Storage	
PO 35.1	DTS/DPF 35.1	
Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	None are applicable.	
PO 35.2	DTS/DPF 35.2	

Page 56 of 110 Printed on 11/08/2022

Policy24 - Enquiry		
Provision is made for suitable external clothes drying facilities.	None are applicable.	
PO 35.3	DTS/DPF 35.3	
Provision is made for suitable household waste and recyclable material storage facilities which are:	None are applicable.	
located away, or screened, from public view, and conveniently located in proximity to dwellings and the waste collection point.		
PO 35.4	DTS/DPF 35.4	
Waste and recyclable material storage areas are located away from dwellings.	Dedicated waste and recyclable material storage areas are located at least 3r from any habitable room window.	
PO 35.5	DTS/DPF 35.5	
Where waste bins cannot be conveniently collected from the street, provision is made for on-site waste collection, designed to accommodate the safe and convenient access, egress and movement of waste collection vehicles.	None are applicable.	
PO 35.6	DTS/DPF 35.6	
Services including gas and water meters are conveniently located and screened from public view.	None are applicable.	
Water sensitiv	e urban design	
PO 36.1	DTS/DPF 36.1	
Residential development creating a common driveway / access includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.	
PO 36.2	DTS/DPF 36.2	
Residential development creating a common driveway / access includes a stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.	
Supported Accommodation	on and retirement facilities	
Siting, Configur	ation and Design	
PO 37.1	DTS/DPF 37.1	
Supported accommodation and housing for aged persons and people with disabilities is located where on-site movement of residents is not unduly restricted by the slope of the land.	None are applicable.	
PO 37.2	DTS/DPF 37.2	
Universal design features are incorporated to provide options for people living with disabilities or limited mobility and / or to facilitate ageing in place.	None are applicable.	
, , , , , , , , , , , , , , , , , , , ,	and Access	
PO 38.1	DTS/DPF 38.1	
Development is designed to support safe and convenient access and movement for residents by providing:	None are applicable.	
 (a) ground-level access or lifted access to all units (b) level entry porches, ramps, paths, driveways, passenger loading areas and areas adjacent to footpaths that allow for the passing of wheelchairs and resting places (c) car parks with gradients no steeper than 1-in-40, and of sufficient area to provide for wheelchair manoeuvrability (d) kerb ramps at pedestrian crossing points. 		
Communal	Open Space	
PO 39.1	DTS/DPF 39.1	

Page 57 of 110 Printed on 11/08/2022

indoor and outdoor communal areas to be used by residents and visitors.	None are applicable.
PO 39.2	DTS/DPF 39.2
Private open space provision may be substituted for communal open space which is designed and sited to meet the recreation and amenity needs of residents.	None are applicable.
PO 39.3	DTS/DPF 39.3
Communal open space is of sufficient size and dimensions to cater for group recreation.	Communal open space incorporates a minimum dimension of 5 metres.
PO 39.4	DTS/DPF 39.4
Communal open space is designed and sited to:	None are applicable.
(a) be conveniently accessed by the dwellings which it services (b) have regard to acoustic, safety, security and wind effects.	
PO 39.5	DTS/DPF 39.5
Communal open space contains landscaping and facilities that are functional, attractive and encourage recreational use.	None are applicable.
PO 39.6	DTS/DPF 39.6
Communal open space is designed and sited to:	None are applicable.
in relation to rooftop or elevated gardens, minimise overlooking into habitable room windows or onto the useable private open space of other dwellings in relation to ground floor communal space, be overlooked by habitable rooms to facilitate passive surveillance.	
Site Facilities	Waste Storage
PO 40.1	DTS/DPF 40.1
Development is designed to provide storage areas for personal items and specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles.	None are applicable.
specialised equipment such as small electric powered vehicles, including	None are applicable. DTS/DPF 40.2
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles.	
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of	DTS/DPF 40.2
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants.	DTS/DPF 40.2 None are applicable.
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 40.3	DTS/DPF 40.2 None are applicable. DTS/DPF 40.3
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 40.3 Provision is made for suitable external clothes drying facilities.	DTS/DPF 40.2 None are applicable. DTS/DPF 40.3 None are applicable.
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 40.3 Provision is made for suitable external clothes drying facilities. PO 40.4 Provision is made for suitable household waste and recyclable material	DTS/DPF 40.2 None are applicable. DTS/DPF 40.3 None are applicable. DTS/DPF 40.4
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 40.3 Provision is made for suitable external clothes drying facilities. PO 40.4 Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	DTS/DPF 40.2 None are applicable. DTS/DPF 40.3 None are applicable. DTS/DPF 40.4 None are applicable.
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 40.3 Provision is made for suitable external clothes drying facilities. PO 40.4 Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view.	DTS/DPF 40.2 None are applicable. DTS/DPF 40.3 None are applicable. DTS/DPF 40.4 None are applicable. DTS/DPF 40.5 Dedicated waste and recyclable material storage areas are located at least 3m
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 40.3 Provision is made for suitable external clothes drying facilities. PO 40.4 Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view. PO 40.5 Waste and recyclable material storage areas are located away from dwellings.	DTS/DPF 40.2 None are applicable. DTS/DPF 40.3 None are applicable. DTS/DPF 40.4 None are applicable. DTS/DPF 40.5 Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window.
specialised equipment such as small electric powered vehicles, including facilities for the recharging of small electric-powered vehicles. PO 40.2 Provision is made for suitable mailbox facilities close to the major pedestrian entry to the site or conveniently located considering the nature of accommodation and mobility of occupants. PO 40.3 Provision is made for suitable external clothes drying facilities. PO 40.4 Provision is made for suitable household waste and recyclable material storage facilities conveniently located away, or screened, from view. PO 40.5 Waste and recyclable material storage areas are located away from dwellings. PO 40.6 Provision is made for on-site waste collection where 10 or more bins are to be	DTS/DPF 40.2 None are applicable. DTS/DPF 40.3 None are applicable. DTS/DPF 40.4 None are applicable. DTS/DPF 40.5 Dedicated waste and recyclable material storage areas are located at least 3m from any habitable room window. DTS/DPF 40.6

Page 58 of 110 Printed on 11/08/2022

Student Accommodation PO 41 1 DTS/DPF 41 1 Student accommodation is designed to provide safe, secure, attractive, Student accommodation provides: convenient and comfortable living conditions for residents, including an a range of living options to meet a variety of accommodation needs, internal layout and facilities that are designed to provide sufficient space and such as one-bedroom, two-bedroom and disability access units amenity for the requirements of student life and promote social interaction. common or shared facilities to enable a more efficient use of space, including: shared cooking, laundry and external drying facilities (i) internal and external communal and private open space provided in accordance with Design in Urban Areas Table 1 - Private Open Space common storage facilities at the rate of 8m³ for every 2 dwellings or students (iv) common on-site parking in accordance with Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas bicycle parking at the rate of one space for every 2 students. PO 41.2 **DTS/DPF 41.2** Student accommodation is designed to provide easy adaptation of the building None are applicable. to accommodate an alternative use of the building in the event it is no longer required for student housing. All non-residential development Water Sensitive Design PO 42.1 DTS/DPF 42 1 Development likely to result in risk of export of sediment, suspended solids, None are applicable. organic matter, nutrients, oil and grease include stormwater management systems designed to minimise pollutants entering stormwater. DTS/DPF 42.2 Water discharged from a development site is of a physical, chemical and None are applicable. biological condition equivalent to or better than its pre-developed state. PO 42.3 DTS/DPF 42.3 Development includes stormwater management systems to mitigate peak flows None are applicable. and manage the rate and duration of stormwater discharges from the site to ensure that development does not increase peak flows in downstream systems. Wash-down and Waste Loading and Unloading PO 43.1 **DTS/DPF 43.1** Areas for activities including loading and unloading, storage of waste refuse None are applicable. bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface (b) paved with an impervious material to facilitate wastewater collection (c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area (d) are designed to drain wastewater to either: a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme a holding tank and its subsequent removal off-site on a

Page 59 of 110 Printed on 11/08/2022

r Ulicy2	-olicyz4 - Eliquii y			
	regular basis.			
	Laneway Development			
	Infrastructure and Access			
PO 44.1		DTS/DPF 44.1		
	opment with a primary street comprising a laneway, alley, lane, right of similar minor thoroughfare only occurs where:	Development with a primary street frontage that is not an alley, lane, right of way or similar public thoroughfare.		
(a)	existing utility infrastructure and services are capable of accommodating the development			
(b)	the primary street can support access by emergency and regular service vehicles (such as waste collection)			
(c)	it does not require the provision or upgrading of infrastructure on public land (such as footpaths and stormwater management systems)			
(d)	safety of pedestrians or vehicle movement is maintained			
(e)	any necessary grade transition is accommodated within the site of the development to support an appropriate development intensity and orderly development of land fronting minor thoroughfares.			

Table 1 - Private Open Space

Dwelling Type	Dwelling / Site	Minimum Rate	
	Configuration		
Dwelling (at ground level, other than a residential flat building that includes above ground dwellings)		Total private open space area: (a) Site area <301m2: 24m2 located behind the building line. (b) Site area ≥ 301m2: 60m2 located behind the building line. Minimum directly accessible from a living room: 16m2 / with a minimum dimension 3m.	
Cabin or caravan (permanently fixed to the ground) in a residential park or caravan and tourist park		Total area: 16m ² , which may be uses as second car parking space, provided on each site intended for residential occupation.	
Dwelling in a residential flat building or mixed use building which incorporate above ground	Dwellings at ground level:	15m ² / minimum dimension 3m	
level dwellings	Dwellings above ground level:		
	Studio (no separate bedroom)	4m ² / minimum dimension 1.8m	
	One bedroom dwelling	8m ² / minimum dimension 2.1m	
	Two bedroom dwelling	11m ² / minimum dimension 2.4m	
	Three + bedroom dwelling	15 m ² / minimum dimension 2.6m	

Forestry

Assessment Provisions (AP)

Page 60 of 110 Printed on 11/08/2022

DO 1 Commercial forestry is designed and sited to maximise economic benefits whilst managing potential negative impacts on the environment, transport networks, surrounding land uses and landscapes.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
	Siting	
PO 1.1	DTS/DPF 1.1	
Commercial forestry plantations are established where there is no detrimenta effect on the physical environment or scenic quality of the rural landscape.	None are applicable.	
PO 1.2	DTS/DPF 1.2	
Commercial forestry plantations are established on slopes that are stable to minimise the risk of soil erosion.	Commercial forestry plantations are not located on land with a slope exceeding 20% (1-in-5).	
PO 1.3	DTS/DPF 1.3	
Commercial forestry plantations and operations associated with their establishment, management and harvesting are appropriately set back from any sensitive receiver to minimise fire risk and noise disturbance.	Commercial forestry plantations and operations associated with their establishment, management and harvesting are set back 50m or more from any sensitive receiver.	
PO 1.4	DTS/DPF 1.4	
Commercial forestry plantations are separated from reserves gazetted under the <i>National Parks and Wildlife Act 1972</i> and/or <i>Wilderness Protection Act 1992</i> to minimise fire risk and potential for weed infestation.	, ,	
Wate	r Protection	
PO 2.1	DTS/DPF 2.1	
Commercial forestry plantations incorporate artificial drainage lines (i.e. culverts, runoffs and constructed drains) integrated with natural drainage line to minimise concentrated water flows onto or from plantation areas.	None are applicable.	
PO 2.2	DTS/DPF 2.2	
Appropriate siting, layout and design measures are adopted to minimise the impact of commercial forestry plantations on surface water resources.	(a) do not involve cultivation (excluding spot cultivation) in drainage lines (b) are set back 20m or more from the banks of any major watercourse (a third order or higher watercourse), lake, reservoir, wetland or sinkhole (with direct connection to an aquifer) (c) are set back 10m or more from the banks of any first or second order watercourse or sinkhole (with no direct connection to an aquifer).	
Fire N	lanagement	
PO 3.1	DTS/DPF 3.1	
Commercial forestry plantations incorporate appropriate firebreaks and fire management design elements.	Commercial forestry plantations provide: (a) 7m or more wide external boundary firebreaks for plantations of 40ha	
	or less (b) 10m or more wide external boundary firebreaks for plantations of between 40ha and 100ha	
	(c) 20m or more wide external boundary firebreaks, or 10m with an additional 10m or more of fuel-reduced plantation, for plantations of 100ha or greater.	

Page 61 of 110 Printed on 11/08/2022

PO 3.2	DTS/DPF 3.2		
Commercial forestry plantations incorporate appropriate fire management access tracks.	Commercial forestry plantation	on fire managem	nent access tracks:
400000 440000	(a) are incorporated with	hin all firebreaks	3
	(b) are 7m or more wid	e with a vertical	clearance of 4m or more
	are a no through ac	cess track are a	gh access at junctions, or if they ppropriately signposted and or fire-fighting vehicles
	(d) partition the plantati	on into units of 4	Oha or less in area.
Power-line Power-line	Clearances		
PO 4.1	DTS/DPF 4.1		
**		y plantations incorporating trees with an expected mature an 6m meet the clearance requirements listed in the	
	Voltage of transmission line	Tower or Pole	Minimum horizontal clearance distance between plantings and transmission lines
	500 kV	Tower	38m
	275 kV	Tower	25m
	132 kV	Tower	30m
	132 kV	Pole	20m
	66 kV	Pole	20m
	Less than 66 kV	Pole	20m

Housing Renewal

Assessment Provisions (AP)

	Desired Outcome
DO 1	Renewed residential environments replace older social housing and provide new social housing infrastructure and other housing options and tenures to enhance the residential amenity of the local area.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
Land Use	and Intensity
PO 1.1	DTS/DPF 1.1
Residential development provides a range of housing choices.	Development comprises one or more of the following:
	(a) detached dwellings
	(b) semi-detached dwellings
	(c) row dwellings

Page 62 of 110 Printed on 11/08/2022

Policy24 - Eliquily	
	(d) group dwellings
	(e) residential flat buildings.
PO 1.2	DTS/DPF 1.2
Medium-density housing options or higher are located in close proximity to public transit, open space and/or activity centres.	None are applicable.
Buildin	g Height
PO 2.1	DTS/DPF 2.1
Buildings generally do not exceed 3 building levels unless in locations close to public transport, centres and/or open space.	Building height (excluding garages, carports and outbuildings) does not exceed 3 building levels and 12m and wall height does not exceed 9m (not including a gable end).
PO 2.2	DTS/DPF 2.2
Medium or high rise residential flat buildings located within or at the interface with zones which restrict heights to a maximum of 2 building levels transition down in scale and height towards the boundary of that zone, other than where it is a street boundary.	None are applicable.
Primary St	reet Setback
PO 3.1	DTS/DPF 3.1
Buildings are set back from the primary street boundary to contribute to an attractive streetscape character.	Buildings are no closer to the primary street (excluding any balcony, verandah, porch, awning or similar structure) than 3m.
Secondary S	Street Setback
PO 4.1	DTS/DPF 4.1
Buildings are set back from secondary street boundaries to maintain separation between building walls and public streets and contribute to a suburban streetscape character.	Buildings are set back at least 900mm from the boundary of the allotment with a secondary street frontage.
Bounda	I ary Walls
PO 5.1	DTS/DPF 5.1
Boundary walls are limited in height and length to manage visual impacts and access to natural light and ventilation.	Except where the dwelling is located on a central site within a row dwelling or terrace arrangement, dwellings with side boundary walls are sited on only one side boundary and satisfy (a) or (b):
	(a) adjoin or abut a boundary wall of a building on adjoining land for the same length and height
	(b) do not: (i) exceed 3.2m in height from the lower of the natural or finished ground level (ii) exceed 11.5m in length (iii) when combined with other walls on the boundary of the
	subject development site, a maximum 45% of the length of the boundary (iv) encroach within 3 metres of any other existing or proposed boundary walls on the subject land.
PO 5.2	DTS/DPF 5.2
Dwellings in a semi-detached, row or terrace arrangement maintain space between buildings consistent with a suburban streetscape character.	Dwellings in a semi-detached or row arrangement are set back 900mm or more from side boundaries shared with allotments outside the development site, except for a carport or garage.
Side Boundary Setback	
PO 6.1	DTS/DPF 6.1
Buildings are set back from side boundaries to provide:	Other than walls located on a side boundary, buildings are set back from side boundaries:
(a) separation between dwellings in a way that contributes to a suburban character	(a) at least 900mm where the wall height is up to 3m

Page 63 of 110 Printed on 11/08/2022

(b) access to natural light and ventilation for neighbours.	 (b) other than for a wall facing a southern side boundary, at least 900mm plus 1/3 of the wall height above 3m (c) at least 1.9m plus 1/3 of the wall height above 3m for walls facing a southern side boundary.
Rear Bound	dary Setback
PO 7.1	DTS/DPF 7.1
Buildings are set back from rear boundaries to provide:	Dwellings are set back from the rear boundary:
 (a) separation between dwellings in a way that contributes to a suburban character (b) access to natural light and ventilation for neighbours (c) private open space (d) space for landscaping and vegetation. 	(a) 3m or more for the first building level (b) 5m or more for any subsequent building level.
Buildings ele	evation design
PO 8.1	DTS/DPF 8.1
Dwelling elevations facing public streets and common driveways make a positive contribution to the streetscape and common driveway areas.	Each dwelling includes at least 3 of the following design features within the building elevation facing a primary street, and at least 2 of the following design features within the building elevation facing any other public road (other than a laneway) or a common driveway:
	 (a) a minimum of 30% of the building elevation is set back an additional 300mm from the building line (b) a porch or portico projects at least 1m from the building elevation (c) a balcony projects from the building elevation (d) a verandah projects at least 1m from the building elevation (e) eaves of a minimum 400mm width extend along the width of the front elevation (f) a minimum 30% of the width of the upper level projects forward from the lower level primary building line by at least 300mm. (g) a minimum of two different materials or finishes are incorporated on the walls of the building elevation, with a maximum of 80% of the building elevation in a single material or finish.
PO 8.2 Dwellings incorporate windows along primary street frontages to encourage passive surveillance and make a positive contribution to the streetscape.	DTS/DPF 8.2 Each dwelling with a frontage to a public street: (a) includes at least one window facing the primary street from a habitable room that has a minimum internal room dimension of 2.4m (b) has an aggregate window area of at least 2m² facing the primary street
PO 8.3	DTS/DPF 8.3
The visual mass of larger buildings is reduced when viewed from adjoining allotments or public streets.	None are applicable.
PO 8.4	DTS/DPF 8.4
Built form considers local context and provides a quality design response through scale, massing, materials, colours and architectural expression.	None are applicable.
PO 8.5	DTS/DPF 8.5
Entrances to multi-storey buildings are:	None are applicable.
 (a) oriented towards the street (b) visible and easily identifiable from the street (c) designed to include a common mail box structure. 	
Outlook and amenity	
PO 9.1	DTS/DPF 9.1
Living rooms have an external outlook to provide a high standard of amenity for occupants.	A living room of a dwelling incorporates a window with an external outlook towards the street frontage or private open space.

Page 64 of 110 Printed on 11/08/2022

PO 9.2 DTS/DPF 9.2 Bedrooms are separated or shielded from active communal recreation areas, None are applicable. common access areas and vehicle parking areas and access ways to mitigate noise and artificial light intrusion. Private Open Space PO 10.1 DTS/DPF 10.1 Dwellings are provided with suitable sized areas of usable private open space Private open space is provided in accordance with the following table: to meet the needs of occupants. Dwelling / Site Minimum Rate **Dwelling Type** Configuration Dwelling (at ground Total area: 24m² located level) behind the building line Minimum adjacent to a living room: 16m² with a minimum dimension 3m Dwelling (above 4m² / minimum dimension Studio ground level) 1.8m 8m² / minimum dimension One bedroom dwelling 2 1m 11m² / minimum dimension Two bedroom dwelling 15 m² / minimum Three + bedroom dimension 2 6m dwelling PO 10.2 **DTS/DPF 10.2** Private open space positioned to provide convenient access from internal At least 50% of the required area of private open space is accessible from a living areas. habitable room. PO 10.3 DTS/DPF 10.3 Private open space is positioned and designed to: None are applicable. (a) provide useable outdoor space that suits the needs of occupants; (b) take advantage of desirable orientation and vistas; and (c) adequately define public and private space. Visual privacy DTS/DPF 11.1 PO 11 1 Development mitigates direct overlooking from upper level windows to Upper level windows facing side or rear boundaries shared with another habitable rooms and private open spaces of adjoining residential uses. residential allotment/site satisfy one of the following: are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than 200mm (b) have sill heights greater than or equal to 1.5m above finished floor (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5m above the finished floor. PO 11.2 DTS/DPF 11.2 Development mitigates direct overlooking from upper level balconies and One of the following is satisfied: terraces to habitable rooms and private open space of adjoining residential

Page 65 of 110 Printed on 11/08/2022

uses.	(a) the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace or (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: (i) 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land or (ii) 1.7m above finished floor level in all other cases
Lands	Lacaping
PO 12.1	DTS/DPF 12.1
Soft landscaping is incorporated into development to:	Residential development incorporates pervious areas for soft landscaping with a minimum dimension of 700mm provided in accordance with (a) and (b):
(a) minimise heat absorption and reflection (b) maximise shade and shelter (c) maximise stormwater infiltration and biodiversity	(a) a total area as determined by the following table:
(d) enhance the appearance of land and streetscapes.	Dwelling site area (or in the case of residential flat building or group dwelling(s), average site area) (m2) Minimum percentage of site
	<150 10%
	<200
	>450 25%
	(b) at least 30% of land between the road boundary and the building line.
Water Sen	sitive Design
Residential development is designed to capture and use stormwater to: (a) maximise efficient use of water resources (b) manage peak stormwater runoff flows and volume to ensure the carrying capacities of downstream systems are not overloaded (c) manage runoff quality to maintain, as close as practical, predevelopment conditions.	None are applicable.
Car F	I Parking
PO 14.1	DTS/DPF 14.1
On-site car parking is provided to meet the anticipated demand of residents, with less on-site parking in areas in close proximity to public transport.	On-site car parking is provided at the following rates per dwelling: (a) 2 or fewer bedrooms - 1 car parking space (b) 3 or more bedrooms - 2 car parking spaces.
PO 14.2	DTS/DPF 14.2
Enclosed car parking spaces are of dimensions to be functional, accessible and convenient.	Residential parking spaces enclosed by fencing, walls or other obstructions with the following internal dimensions (separate from any waste storage area): (a) single parking spaces: (i) a minimum length of 5.4m (ii) a minimum width of 3.0m (iii) a minimum garage door width of 2.4m (b) double parking spaces (side by side): (i) a minimum length of 5.4m (ii) a minimum width of 5.5m (iii) minimum garage door width of 2.4m per space.
PO 14.3	DTS/DPF 14.3

Page 66 of 110 Printed on 11/08/2022

Uncovered car parking spaces are of dimensions to be functional, accessible and convenient.	Uncovered car parking spaces have: (a) a minimum length of 5.4m (b) a minimum width of 2.4m (c) a minimum width between the centre line of the space and any fence, wall or other obstruction of 1.5m.
PO 14.4	DTS/DPF 14.4
Residential flat buildings and group dwelling developments provide sufficient on-site visitor car parking to cater for anticipated demand.	Visitor car parking for group and residential flat buildings incorporating 4 or more dwellings is provided on-site at a minimum ratio of 0.25 car parking spaces per dwelling.
PO 14.5	DTS/DPF 14.5
Residential flat buildings provide dedicated areas for bicycle parking.	Residential flat buildings provide one bicycle parking space per dwelling.
Oversh	adowing
PO 15.1	DTS/DPF 15.1
Development minimises overshadowing of the private open spaces of adjoining land by ensuring that ground level open space associated with residential buildings receive direct sunlight for a minimum of 2 hours between 9am and 3pm on 21 June.	None are applicable.
Wa	aste
PO 16.1 Provision is made for the convenient storage of waste bins in a location	DTS/DPF 16.1 A waste bin storage area is provided behind the primary building line that:
screened from public view.	 (a) has a minimum area of 2m² with a minimum dimension of 900mm (separate from any designated car parking spaces or private open space).; and (b) has a continuous unobstructed path of travel (excluding moveable objects like gates, vehicles and roller doors) with a minimum width of 800mm between the waste bin storage area and the street.
PO 16.2	DTS/DPF 16.2
Residential flat buildings provide a dedicated area for the on-site storage of waste which is:	None are applicable.
(a) easily and safely accessible for residents and for collection vehicles (b) screened from adjoining land and public roads (c) of sufficient dimensions to be able to accommodate the waste storage needs of the development considering the intensity and nature of the development and the frequency of collection.	
Vehicle	Access
PO 17.1	DTS/DPF 17.1
Driveways are located and designed to facilitate safe access and egress while maximising land available for street tree planting, landscaped street frontages and on-street parking.	None are applicable.
PO 17.2	DTS/DPF 17.2
Vehicle access is safe, convenient, minimises interruption to the operation of public roads and does not interfere with street infrastructure or street trees.	Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner
	(ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance

Page 67 of 110 Printed on 11/08/2022

, , ,	
	(iii) 6m or more from the tangent point of an intersection of 2 or more roads
	(iv) outside of the marked lines or infrastructure dedicating a
	pedestrian crossing.
PO 17.3	DTS/DPF 17.3
Driveways are designed to enable safe and convenient vehicle movements from the public road to on-site parking spaces.	Driveways are designed and sited so that:
Troff the public road to on-site parking spaces.	(a) the gradient from the place of access on the boundary of the allotment to the finished floor level at the front of the garage or carport is not more than 1-in-4 on average
	(b) they are aligned relative to the street so that there is no more than a 20 degree deviation from 90 degrees between the centreline of any dedicated car parking space to which it provides access (measured from the front of that space) and the road boundary.
	(c) if located so as to provide access from an alley, lane or right of way the alley, lane or right or way is at least 6.2m wide along the boundary of the allotment / site.
PO 17.4	DTS/DPF 17.4
Driveways and access points are designed and distributed to optimise the provision of on-street parking.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements:
	minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number)
	Minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	minimum car park length of 6m for an intermediate space located between two other parking spaces.
PO 17.5	DTS/DPF 17.5
Residential driveways that service more than one dwelling of a dimension to allow safe and convenient movement.	Where on-street parking is available abutting the site's street frontage, on- street parking is retained in accordance with the following requirements:
	(a) minimum 0.33 on-street spaces per dwelling on the site (rounded up to the nearest whole number)
	(b) minimum car park length of 5.4m where a vehicle can enter or exit a space directly
	(c) minimum carpark length of 6m for an intermediate space located between two other parking spaces or to an end obstruction where the parking is indented.
PO 17.6	DTS/DPF 17.6
Residential driveways that service more than one dwelling are designed to allow passenger vehicles to enter and exit the site and manoeuvre within the site in a safe and convenient manner.	Driveways providing access to more than one dwelling, or a dwelling on a battle-axe site, allow a B85 passenger vehicle to enter and exit the garages or parking spaces in no more than a three-point turn manoeuvre
PO 17.7	DTS/DPF 17.7
Dwellings are adequately separated from common driveways and manoeuvring areas.	Dwelling walls with entry doors or ground level habitable room windows are set back at least 1.5m from any driveway or area designated for the movement and manoeuvring of vehicles.
Sto	prage
PO 18.1	DTS/DPF 18.1
Dwellings are provided with sufficient and accessible space for storage to meet likely occupant needs.	Dwellings are provided with storage at the following rates and 50% or more of the storage volume is provided within the dwelling:
	(a) studio: not less than 6m ³
	(b) 1 bedroom dwelling / apartment: not less than 8m ³
	(c) 2 bedroom dwelling / apartment: not less than 10m ³
	(d) 3+ bedroom dwelling / apartment: not less than 12m ³ .
Earti	hworks

Page 68 of 110 Printed on 11/08/2022

PO 19.1 DTS/DPF 19.1 Development, including any associated driveways and access tracks, The development does not involve: minimises the need for earthworks to limit disturbance to natural topography. excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height exceeding 2m. Service connections and infrastructure PO 20.1 DTS/DPF 20.1 Dwellings are provided with appropriate service connections and The site and building: infrastructure. have the ability to be connected to a permanent potable water supply have the ability to be connected to a sewerage system, or a wastewater system approved under the South Australian Public Health Act 2011 (c) have the ability to be connected to electricity supply have the ability to be connected to an adequate water supply (and pressure) for fire-fighting purposes would not be contrary to the Regulations prescribed for the purposes of Section 86 of the Electricity Act 1996. Site contamination PO 21 1 DTS/DPF 21.1 Land that is suitable for sensitive land uses to provide a safe environment. Development satisfies (a), (b), (c) or (d): does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a more sensitive use involves a change in the use of land to a more sensitive use on land at which site contamination does not exist (as demonstrated in a site contamination declaration form) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that site contamination does not exist (or no longer exists) at the land B. the land is suitable for the proposed use or range of uses (without the need for any further remediation) where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development) no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

Page 69 of 110 Printed on 11/08/2022

DO 1 Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Ger	neral	
PO 1.1	DTS/DPF 1.1	
Development is located and designed to minimise hazard or nuisance to adjacent development and land uses.	None are applicable.	
Visual	Amenity	
PO 2.1	DTS/DPF 2.1	
The visual impact of above-ground infrastructure networks and services (excluding high voltage transmission lines), renewable energy facilities (excluding wind farms), energy storage facilities and ancillary development is minimised from townships, scenic routes and public roads by: (a) utilising features of the natural landscape to obscure views where practicable (b) siting development below ridgelines where practicable (c) avoiding visually sensitive and significant landscapes (d) using materials and finishes with low-reflectivity and colours that complement the surroundings (e) using existing vegetation to screen buildings (f) incorporating landscaping or landscaped mounding around the perimeter of a site and between adjacent allotments accommodating	None are applicable.	
or zoned to primarily accommodate sensitive receivers. PO 2.2	DTS/DPF 2.2	
Pumping stations, battery storage facilities, maintenance sheds and other ancillary structures incorporate vegetation buffers to reduce adverse visual impacts on adjacent land.	None are applicable.	
PO 2.3	DTS/DPF 2.3	
Surfaces exposed by earthworks associated with the installation of storage facilities, pipework, penstock, substations and other ancillary plant are reinstated and revegetated to reduce adverse visual impacts on adjacent land.	None are applicable.	
Rehal	Rehabilitation	
PO 3.1 Progressive rehabilitation (incorporating revegetation) of disturbed areas, ahead of or upon decommissioning of areas used for renewable energy facilities and transmission corridors.	DTS/DPF 3.1 None are applicable.	
Hazard Management		
PO 4.1 Infrastructure and renewable energy facilities and ancillary development located and operated to not adversely impact maritime or air transport safety, including the operation of ports, airfields and landing strips.	DTS/DPF 4.1 None are applicable.	

Page 70 of 110 Printed on 11/08/2022

Policy24 - Enquiry	
PO 4.2	DTS/DPF 4.2
Facilities for energy generation, power storage and transmission are separated as far as practicable from dwellings, tourist accommodation and frequently visited public places (such as viewing platforms / lookouts) to reduce risks to public safety from fire or equipment malfunction.	None are applicable.
PO 4.3	DTS/DPF 4.3
Bushfire hazard risk is minimised for renewable energy facilities by providing appropriate access tracks, safety equipment and water tanks and establishing cleared areas around substations, battery storage and operations compounds.	None are applicable.
Electricity Infrastructure ar	nd Battery Storage Facilities
PO 5.1	DTS/DPF 5.1
Electricity infrastructure is located to minimise visual impacts through techniques including:	None are applicable.
(a) siting utilities and services:	
PO 5.2	DTS/DPF 5.2
Electricity supply (excluding transmission lines) serving new development in urban areas and townships installed underground, excluding lines having a capacity exceeding or equal to 33kV.	None are applicable.
PO 5.3	DTS/DPF 5.3
Battery storage facilities are co-located with substation infrastructure where practicable to minimise the development footprint and reduce environmental impacts.	None are applicable.
Telecommunic	cation Facilities
PO 6.1	DTS/DPF 6.1
The proliferation of telecommunications facilities in the form of towers/monopoles in any one locality is managed, where technically feasible, by co-locating a facility with other communications facilities to mitigate impacts from clutter on visual amenity.	None are applicable.
PO 6.2	DTS/DPF 6.2
Telecommunications antennae are located as close as practicable to support structures to manage overall bulk and mitigate impacts on visual amenity.	None are applicable.
PO 6.3	DTS/DPF 6.3
Telecommunications facilities, particularly towers/monopoles, are located and sized to mitigate visual impacts by the following methods:	None are applicable.
(a) where technically feasible, incorporating the facility within an existing structure that may serve another purpose	
or all of the following:	
(b) using existing buildings and landscape features to obscure or interrupt views of a facility from nearby public roads, residential areas and places of high public amenity to the extent practical without unduly hindering the effective provision of telecommunications services	
using materials and finishes that complement the environment screening using landscaping and vegetation, particularly for equipment shelters and huts.	

Page 71 of 110 Printed on 11/08/2022

Renewable E	nergy Facilities
PO 7.1	DTS/DPF 7.1
Renewable energy facilities are located as close as practicable to existing transmission infrastructure to facilitate connections and minimise environmental impacts as a result of extending transmission infrastructure.	None are applicable.
Renewable Energy	Facilities (Wind Farm)
PO 8.1	DTS/DPF 8.1
Visual impact of wind turbine generators on the amenity of residential and tourist development is reduced through appropriate separation.	Wind turbine generators are: (a) set back at least 2000m from the base of a turbine to any of the following zones: (i) Rural Settlement Zone (ii) Township Zone (iii) Rural Living Zone (iv) Rural Neighbourhood Zone with an additional 10m setback per additional metre over 150m overall turbine height (measured from the base of the turbine). (b) set back at least 1500m from the base of the turbine to non-associated (non-stakeholder) dwellings and tourist accommodation
PO 8.2	DTS/DPF 8.2
The visual impact of wind turbine generators on natural landscapes is managed by:	None are applicable.
 (a) designing wind turbine generators to be uniform in colour, size and shape (b) coordinating blade rotation and direction (c) mounting wind turbine generators on tubular towers as opposed to lattice towers. 	
PO 8.3	DTS/DPF 8.3
Wind turbine generators and ancillary development minimise potential for bird and bat strike.	None are applicable.
PO 8.4	DTS/DPF 8.4
Wind turbine generators incorporate recognition systems or physical markers to minimise the risk to aircraft operations.	No Commonwealth air safety (CASA / ASA) or Defence requirement is applicable.
PO 8.5	DTS/DPF 8.5
Meteorological masts and guidewires are identifiable to aircraft through the use of colour bands, marker balls, high visibility sleeves or flashing strobes.	None are applicable.
Renewable Energy F	facilities (Solar Power)
PO 9.1 Ground mounted solar power facilities generating 5MW or more are not located on land requiring the clearance of areas of intact native vegetation or on land of high environmental, scenic or cultural value.	DTS/DPF 9.1 None are applicable.
PO 9.2	DTS/DPF 9.2
Ground mounted solar power facilities allow for movement of wildlife by: (a) incorporating wildlife corridors and habitat refuges (b) avoiding the use of extensive security or perimeter fencing or incorporating fencing that enables the passage of small animals without unreasonably compromising the security of the facility.	None are applicable.
PO 0 3	DTS/DPF 0.3
PO 9.3	DTS/DPF 9.3
Amenity impacts of solar power facilities are minimised through separation from conservation areas and sensitive receivers in other ownership.	Ground mounted solar power facilities are set back from land boundaries, conservation areas and relevant zones in accordance with the following

Page 72 of 110 Printed on 11/08/2022

	criteria:				
	Generation Capacity	Approximate size of array	Setback from adjoining land boundary	Setback from conservation areas	Setback from Township, Rural Settlement, Rural Neighbourhood and Rural Living Zones ¹
	50MW>	80ha+	30m	500m	2km
	10MW<50MW	16ha-<80ha	25m	500m	1.5km
	5MW<10MW	8ha to <16ha	20m	500m	1km
	1MW<5MW	1.6ha to <8ha	15m	500m	500m
	100kW<1MW	0.5ha<1.6ha	10m	500m	100m
	<100kW	<0.5ha	5m	500m	25m
	Notes: 1. Does not app facility is located				ounted solar power
PO 9.4	DTS/DPF 9.4				
Ground mounted solar power facilities incorporate landscaping within setbacks from adjacent road frontages and boundaries of adjacent allotments accommodating non-host dwellings, where balanced with infrastructure access and bushfire safety considerations.	None are applic	able.			
Hydropower / Pumpec	l d Hydropower Facilit	ies			
PO 10.1	DTS/DPF 10.1				
Hydropower / pumped hydropower facility storage is designed and operated to minimise the risk of storage dam failure.	None are applica	able.			
PO 10.2	DTS/DPF 10.2				
Hydropower / pumped hydropower facility storage is designed and operated to minimise water loss through increased evaporation or system leakage, with the incorporation of appropriate liners, dam covers, operational measures or detection systems.	None are applica	able.			
PO 10.3	DTS/DPF 10.3				
Hydropower / pumped hydropower facilities on existing or former mine sites minimise environmental impacts from site contamination, including from mine operations or water sources subject to such processes, now or in the future.	None are applicable.				
Water	Supply				
PO 11.1 Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	· ·	supply with the			lated water scheme
PO 11.2	DTS/DPF 11.2				
Dwellings are connected to a reticulated water scheme or mains water supply with the capacity to meet the requirements of the intended use. Where this is	A dwelling is connected, or will be connected, to a reticulated water scheme of				

Page 73 of 110 Printed on 11/08/2022

not available an appropriate rainwater tank or storage system for domestic use development. Where this is not available it is serviced by a rainwater tank or is provided. tanks capable of holding at least 50,000 litres of water which is: (a) exclusively for domestic use (b) connected to the roof drainage system of the dwelling. Wastewater Services PO 12.1 DTS/DPF 12.1 Development is connected to an approved common wastewater disposal Development is connected, or will be connected, to an approved common service with the capacity to meet the requirements of the intended use. Where wastewater disposal service with the capacity to meet the requirements of the this is not available an appropriate on-site service is provided to meet the development. Where this is not available it is instead capable of being ongoing requirements of the intended use in accordance with the following: serviced by an on-site waste water treatment system in accordance with the following: it is wholly located and contained within the allotment of the development it will service (a) the system is wholly located and contained within the allotment of development it will service; and (b) in areas where there is a high risk of contamination of surface, ground, or marine water resources from on-site disposal of liquid (b) the system will comply with the requirements of the South Australian wastes, disposal systems are included to minimise the risk of Public Health Act 2011. pollution to those water resources (c) septic tank effluent drainage fields and other wastewater disposal areas are located away from watercourses and flood prone, sloping, saline or poorly drained land to minimise environmental harm. PO 12.2 DTS/DPF 12.2 Effluent drainage fields and other wastewater disposal areas are maintained to Development is not built on, or encroaches within, an area that is, or will be, ensure the effective operation of waste systems and minimise risks to human required for a sewerage system or waste control system. health and the environment. Temporary Facilities PO 13.1 DTS/DPF 13.1 In rural and remote locations, development that is likely to generate significant A waste collection and disposal service is used to dispose of the volume of waste material during construction, including packaging waste, makes waste at the rate it is generated. provision for a temporary on-site waste storage enclosure to minimise the incidence of wind-blown litter. PO 13.2 **DTS/DPF 13.2** Temporary facilities to support the establishment of renewable energy facilities None are applicable. (including borrow pits, concrete batching plants, laydown, storage, access roads and worker amenity areas) are sited and operated to minimise environmental impact.

Intensive Animal Husbandry and Dairies

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development of intensive animal husbandry and dairies in locations that are protected from encroachment by sensitive receivers and in a manner that minimises their adverse effects on amenity and the environment.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Siting and Design	

Page 74 of 110 Printed on 11/08/2022

Policy24 - Enquiry			
PO 1.1	DTS/DPF 1.1		
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to not unreasonably impact on the environment or amenity of the locality.	None are applicable.		
PO 1.2	DTS/DPF 1.2		
Intensive animal husbandry, dairies and associated activities are sited, designed, constructed and managed to prevent the potential transmission of disease to other operations where animals are kept.	None are applicable.		
PO 1.3	DTS/DPF 1.3		
Intensive animal husbandry and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	None are applicable.		
PO 1.4	DTS/DPF 1.4		
Dairies and associated activities such as wastewater lagoons and liquid/solid waste disposal areas are sited, designed, constructed and managed to not unreasonably impact on sensitive receivers in other ownership in terms of noise and air emissions.	Dairies, associated wastewater lagoon(s) and liquid/solid waste storage and disposal facilities are located 500m or more from the nearest sensitive receiver in other ownership.		
PO 1.5	DTS/DPF 1.5		
Lagoons for the storage or treatment of milking shed effluent is adequately separated from roads to minimise impacts from odour on the general public.	Lagoons for the storage or treatment of milking shed effluent are set back 20m or more from public roads.		
W	aste		
PO 2.1	DTS/DPF 2.1		
Storage of manure, used litter and other wastes (other than waste water lagoons) is sited, designed, constructed and managed to:	None are applicable.		
 (a) avoid attracting and harbouring vermin (b) avoid polluting water resources (c) be located outside 1% AEP flood event areas. 			
Soil and Wa	I ter Protection		
PO 3.1	DTS/DPF 3.1		
To avoid environmental harm and adverse effects on water resources, intensive animal husbandry operations are appropriately set back from: (a) public water supply reservoirs (b) major watercourses (third order or higher stream) (c) any other watercourse, bore or well used for domestic or stock water supplies.	Intensive animal husbandry operations are set back: (a) 800m or more from a public water supply reservoir (b) 200m or more from a major watercourse (third order or higher stream) (c) 100m or more from any other watercourse, bore or well used for domestic or stock water supplies.		
PO 3.2	DTS/DPF 3.2		
Intensive animal husbandry operations and dairies incorporate appropriately designed effluent and run-off facilities that:	None are applicable.		
(a) have sufficient capacity to hold effluent and runoff from the operations on site			
(b) ensure effluent does not infiltrate and pollute groundwater, soil or other water resources.			

Interface between Land Uses

Assessment Provisions (AP)

Page 75 of 110 Printed on 11/08/2022

Desired Outcome Do 1 Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome		o-Satisfy Criteria / Performance Feature	
General Land U	Jse Compatibility		
PO 1.1	DTS/DPF 1.1		
Sensitive receivers are designed and sited to protect residents and occupants from adverse impacts generated by lawfully existing land uses (or lawfully approved land uses) and land uses desired in the zone.	None are applicable.		
PO 1.2	DTS/DPF 1.2		
Development adjacent to a site containing a sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers is designed to minimise adverse impacts.	None are applicable.		
Hours of	Operation		
PO 2.1	DTS/DPF 2.1		
Non-residential development does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) or an adjacent	Development operating within	the following hours:	
zone primarily for sensitive receivers through its hours of operation having regard to:	Class of Development	Hours of operation	
 (a) the nature of the development (b) measures to mitigate off-site impacts (c) the extent to which the development is desired in the zone (d) measures that might be taken in an adjacent zone primarily for sensitive receivers that mitigate adverse impacts without unreasonably compromising the intended use of that land. 	Consulting room	7am to 9pm, Monday to Friday 8am to 5pm, Saturday	
	Office	7am to 9pm, Monday to Friday 8am to 5pm, Saturday	
	Shop, other than any one or combination of the following: (a) restaurant (b) cellar door in the Productive Rural Landscape Zone, Rural Zone or Rural Horticulture Zone	7am to 9pm, Monday to Friday 8am to 5pm, Saturday and Sunday	
Oversh	adowing		
PO 3.1	DTS/DPF 3.1		
Overshadowing of habitable room windows of adjacent residential land uses in:	n: North-facing windows of habitable rooms of adjacent residential land uses neighbourhood-type zone receive at least 3 hours of direct sunlight betwee 9.00am and 3.00pm on 21 June.		
a. a neighbourhood-type zone is minimised to maintain access to direct winter sunlight b. other zones is managed to enable access to direct winter sunlight.			
b. other zones is managed to enable access to direct winter sunlight.			
PO 3.2	DTS/DPF 3.2		
Overshadowing of the primary area of private open space or communal open space of adjacent residential land uses in: a. a neighbourhood type zone is minimised to maintain access to direct	Development maintains 2 hours of direct sunlight between 9.00 am and 3.00 pm on 21 June to adjacent residential land uses in a neighbourhood-type zone in accordance with the following:		
winter sunlight	a. for ground level private op	pen space, the smaller of the following:	

Page 76 of 110 Printed on 11/08/2022

Policy24 - Eriquity	
b. other zones is managed to enable access to direct winter sunlight.	 i. half the existing ground level open space or ii. 35m2 of the existing ground level open space (with at least one of the area's dimensions measuring 2.5m) b. for ground level communal open space, at least half of the existing ground level open space.
PO 3.3	DTS/DPF 3.3
Development does not unduly reduce the generating capacity of adjacent rooftop solar energy facilities taking into account:	None are applicable.
 (a) the form of development contemplated in the zone (b) the orientation of the solar energy facilities (c) the extent to which the solar energy facilities are already overshadowed. 	
PO 3.4	DTS/DPF 3.4
Development that incorporates moving parts, including windmills and wind farms, are located and operated to not cause unreasonable nuisance to nearby dwellings and tourist accommodation caused by shadow flicker.	None are applicable.
Activities Generatii	I ng Noise or Vibration
PO 4.1	DTS/DPF 4.1
Development that emits noise (other than music) does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers).	Noise that affects sensitive receivers achieves the relevant Environment Protection (Noise) Policy criteria.
PO 4.2	DTS/DPF 4.2
Areas for the on-site manoeuvring of service and delivery vehicles, plant and equipment, outdoor work spaces (and the like) are designed and sited to not unreasonably impact the amenity of adjacent sensitive receivers (or lawfully approved sensitive receivers) and zones primarily intended to accommodate sensitive receivers due to noise and vibration by adopting techniques including:	None are applicable.
 (a) locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (c) housing plant and equipment within an enclosed structure or acoustic enclosure (d) providing a suitable acoustic barrier between the plant and / or equipment and the adjacent sensitive receiver boundary or zone. 	
PO 4.3	DTS/DPF 4.3
Fixed plant and equipment in the form of pumps and/or filtration systems for a swimming pool or spa are positioned and/or housed to not cause unreasonable noise nuisance to adjacent sensitive receivers (or lawfully approved sensitive receivers).	The pump and/or filtration system ancillary to a dwelling erected on the same site is: (a) enclosed in a solid acoustic structure located at least 5m from the nearest habitable room located on an adjoining allotment or (b) located at least 12m from the nearest habitable room located on an adjoining allotment.
PO 4.4	DTS/DPF 4.4
1 0 4.4	
External noise into bedrooms is minimised by separating or shielding these rooms from service equipment areas and fixed noise sources located on the same or an adjoining allotment.	Adjacent land is used for residential purposes.

Page 77 of 110 Printed on 11/08/2022

Outdoor areas associated with licensed premises (such as beer gardens or dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.		
PO 4.6	DTS/DPF 4.6		
Development incorporating music achieves suitable acoustic amenity when measured at the boundary of an adjacent sensitive receiver (or lawfully approved sensitive receiver) or zone primarily intended to accommodate	Development incorporating m achieve the following noise lev	usic includes noise attenuation measures that wil vels:	
sensitive receivers.	Assessment location	Music noise level	
	Externally at the nearest existing or envisaged noise sensitive location	Less than 8dB above the level of background noise (L _{90,15min}) in any octave band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB)	
Air C	Quality		
PO 5.1	DTS/DPF 5.1		
Development with the potential to emit harmful or nuisance-generating air pollution incorporates air pollution control measures to prevent harm to human health or unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) within the locality and zones primarily intended to accommodate sensitive receivers.	None are applicable.		
PO 5.2	DTS/DPF 5.2		
Development that includes chimneys or exhaust flues (including cafes, restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by:	None are applicable.		
 (a) incorporating appropriate treatment technology before exhaust emissions are released (b) locating and designing chimneys or exhaust flues to maximise the dispersion of exhaust emissions, taking into account the location of sensitive receivers. 			
Ligh	nt Spill		
PO 6.1	DTS/DPF 6.1		
External lighting is positioned and designed to not cause unreasonable light spill impact on adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.		
PO 6.2	DTS/DPF 6.2		
External lighting is not hazardous to motorists and cyclists.	None are applicable.		
Solar Refle	ctivity / Glare		
PO 7.1	DTS/DPF 7.1		
Development is designed and comprised of materials and finishes that do not unreasonably cause a distraction to adjacent road users and pedestrian areas or unreasonably cause heat loading and micro-climatic impacts on adjacent buildings and land uses as a result of reflective solar glare.	None are applicable.		
Electrical	Interference		
PO 8.1	DTS/DPF 8.1		
Development in rural and remote areas does not unreasonably diminish or result in the loss of existing communication services due to electrical interference.	or	Im in height, measured from existing ground level	
		sight between a fixed transmitter and fixed ther than where an alternative service is available ransmitter or cable.	

Page 78 of 110 Printed on 11/08/2022

Policy24 - Enquiry		
Interface with	Rural Activities	
PO 9.1	DTS/DPF 9.1	
Sensitive receivers are located and designed to mitigate impacts from lawfully existing horticultural and farming activities (or lawfully approved horticultural and farming activities), including spray drift and noise and do not prejudice the continued operation of these activities.	None are applicable.	
PO 9.2	DTS/DPF 9.2	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing intensive animal husbandry activities and do not prejudice the continued operation of these activities.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing land-based aquaculture activities and do not prejudice the continued operation of these activities.	Sensitive receivers are located at least 200m from the boundary of a site used for land-based aquaculture and associated components in other ownership.	
PO 9.4	DTS/DPF 9.4	
Sensitive receivers are located and designed to mitigate potential impacts from lawfully existing dairies including associated wastewater lagoons and liquid/solid waste storage and disposal facilities and do not prejudice the continued operation of these activities.	Sensitive receivers are sited at least 500m from the boundary of a site used for a dairy and associated wastewater lagoon(s) and liquid/solid waste storag and disposal facilities in other ownership.	
PO 9.5	DTS/DPF 9.5	
Sensitive receivers are located and designed to mitigate the potential impacts from lawfully existing facilities used for the handling, transportation and storage of bulk commodities (recognising the potential for extended hours of operation) and do not prejudice the continued operation of these activities.	Sensitive receivers are located away from the boundary of a site used for the handling, transportation and/or storage of bulk commodities in other ownership in accordance with the following: (a) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals to or from any commercial storage facility (b) 300m or more, where it involves the handling of agricultural crop products, rock, ores, minerals, petroleum products or chemicals at a wharf or wharf side facility (including sea-port grain terminals) where the handling of these materials into or from vessels does not exceed 100 tonnes per day (c) 500m or more, where it involves the storage of bulk petroleum in individual containers with a capacity up to 200 litres and a total onsite storage capacity not exceeding 1000 cubic metres (d) 500m or more, where it involves the handling of coal with a capacity up to 1 tonne per day or a storage capacity up to 50 tonnes (e) 1000m or more, where it involves the handling of coal with a capacity exceeding 1 tonne per day but not exceeding 100 tonnes per day or a storage capacity exceeding 50 tonnes but not exceeding 5000 tonnes.	
PO 9.6	DTS/DPF 9.6	
Setbacks and vegetation plantings along allotment boundaries should be incorporated to mitigate the potential impacts of spray drift and other impacts associated with agricultural and horticultural activities.	None are applicable.	
PO 9.7	DTS/DPF 9.7	
Urban development does not prejudice existing agricultural and horticultural activities through appropriate separation and design techniques.	None are applicable.	
Interface with Mines and Quarries (Rural and Remote Areas)		
PO 10.1	DTS/DPF 10.1	
Sensitive receivers are separated from existing mines to minimise the adverse impacts from noise, dust and vibration.	Sensitive receivers are located no closer than 500m from the boundary of a Mining Production Tenement under the <i>Mining Act 1971.</i>	

Land Division

Page 79 of 110 Printed on 11/08/2022

Assessment Provisions (AP)

Desired Outcome			
DO 1	Land division:		
	(a) creates allotments with the appropriate dimensions and shape for their intended use (b) allows efficient provision of new infrastructure and the optimum use of underutilised infrastructure		
	(c) integrates and allocates adequate and suitable land for the preservation of site features of value, including significant vegetation, watercourses, water bodies and other environmental features		
	(d) facilitates solar access through allotment orientation (e) creates a compact urban form that supports active travel, walkability and the use of public transport (f) avoids areas of high natural hazard risk.		

Performance Outcome	Deemed-to-Satisfy Criteria /			
	Designated Performance Feature			
All land division				
Allotment configuration				
PO 1.1	DTS/DPF 1.1			
Land division creates allotments suitable for their intended use.	Division of land satisfies (a) or (b):			
	(a) reflects the site boundaries illustrated and approved in an operative or existing development authorisation for residential development under the Development Act 1993 or Planning, Development and Infrastructure Act 2016 where the allotments are used or are proposed to be used solely for residential purposes (b) is proposed as part of a combined land division application with deemed-to-satisfy dwellings on the proposed allotments.			
PO 1.2	DTS/DPF 1.2			
Land division considers the physical characteristics of the land, preservation of environmental and cultural features of value and the prevailing context of the locality.	None are applicable.			
Design a	and Layout			
PO 2.1	DTS/DPF 2.1			
Land division results in a pattern of development that minimises the likelihood of future earthworks and retaining walls.	None are applicable.			
PO 2.2	DTS/DPF 2.2			
Land division enables the appropriate management of interface impacts between potentially conflicting land uses and/or zones.	None are applicable.			
PO 2.3	DTS/DPF 2.3			
Land division maximises the number of allotments that face public open space and public streets.	None are applicable.			
PO 2.4	DTS/DPF 2.4			
Land division is integrated with site features, adjacent land uses, the existing transport network and available infrastructure.	None are applicable.			
PO 2.5	DTS/DPF 2.5			
Development and infrastructure is provided and staged in a manner that supports an orderly and economic provision of land, infrastructure and services.	None are applicable.			

Page 80 of 110 Printed on 11/08/2022

Policy24 - Eriquily	
Po a a	DTG/DDF 0.0
PO 2.6	DTS/DPF 2.6
Land division results in watercourses being retained within open space and development taking place on land not subject to flooding.	None are applicable.
PO 2.7	DTS/DPF 2.7
Land division results in legible street patterns connected to the surrounding street network.	None are applicable.
PO 2.8	DTS/DPF 2.8
Land division is designed to preserve existing vegetation of value including native vegetation and regulated and significant trees.	None are applicable.
Roads ar	nd Access
PO 3.1	DTS/DPF 3.1
Land division provides allotments with access to an all-weather public road.	None are applicable.
PO 3.2	DTS/DPF 3.2
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.3	DTS/DPF 3.3
Land division does not impede access to publicly owned open space and/or recreation facilities.	None are applicable.
PO 3.4	DTS/DPF 3.4
Road reserves provide for safe and convenient movement and parking of projected volumes of vehicles and allow for the efficient movement of service and emergency vehicles.	None are applicable.
PO 3.5	DTS/DPF 3.5
Road reserves are designed to accommodate pedestrian and cycling infrastructure, street tree planting, landscaping and street furniture.	None are applicable.
PO 3.6	DTS/DPF 3.6
Road reserves accommodate stormwater drainage and public utilities.	None are applicable.
PO 3.7	DTS/DPF 3.7
Road reserves provide unobstructed vehicular access and egress to and from individual allotments and sites.	None are applicable.
PO 3.8	DTS/DPF 3.8
Street patterns and intersections are designed to enable the safe and efficient movement of pedestrian, cycle and vehicular traffic.	None are applicable.
PO 3.9	DTS/DPF 3.9
Roads, open space and thoroughfares provide safe and convenient linkages to the surrounding open space and transport network.	None are applicable.
PO 3.10	DTS/DPF 3.10
Public streets are designed to enable tree planting to provide shade and enhance the amenity of streetscapes.	None are applicable.
PO 3.11	DTS/DPF 3.11
Local streets are designed to create low-speed environments that are safe for cyclists and pedestrians.	None are applicable.
Infrast	ructure
PO 4.1	DTS/DPF 4.1

Page 81 of 110 Printed on 11/08/2022

Policy24 - Eriquity	
Land division incorporates public utility services within road reserves or dedicated easements.	None are applicable.
D0.40	DTS/DPF 4.2
PO 4.2	D15/DPF 4.2
Waste water, sewage and other effluent is capable of being disposed of from each allotment without risk to public health or the environment.	Each allotment can be connected to:
each anotherit without risk to public fleath of the environment.	a waste water treatment plant that has the hydraulic volume and pollutant load treatment and disposal capacity for the maximum predicted wastewater volume generated by subsequent development of the proposed allotment
	or
	(b) a form of on-site waste water treatment and disposal that meets relevant public health and environmental standards.
PO 4.3	DTS/DPF 4.3
Septic tank effluent drainage fields and other waste water disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is or will be, required for a sewerage system or waste control system.
PO 4.4	DTS/DPF 4.4
Constructed wetland systems, including associated detention and retention basins, are sited and designed to ensure public health and safety is protected, including by minimising potential public health risks arising from the breeding of mosquitoes.	None are applicable.
PO 4.5	DTS/DPF 4.5
Constructed wetland systems, including associated detention and retention basins, are sited and designed to allow sediments to settle prior to discharge into watercourses or the marine environment.	None are applicable.
PO 4.6	DTS/DPF 4.6
Constructed wetland systems, including associated detention and retention basins, are sited and designed to function as a landscape feature.	None are applicable.
Minor Land Division	(Under 20 Allotments)
Open	Space
PO 5.1	DTS/DPF 5.1
Land division proposing an additional allotment under 1 hectare provides or supports the provision of open space.	None are applicable.
Solar O	rientation
PO 6.1	DTS/DPF 6.1
Land division for residential purposes facilitates solar access through allotment orientation.	None are applicable.
	sitive Design
PO 7.1	DTS/DPF 7.1
Land division creating a new road or common driveway includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
,	
PO 7.2	DTS/DPF 7.2
Land division designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	None are applicable.
Battle-Axe l	Development Development
PO 8.1	DTS/DPF 8.1
Battle-axe development appropriately responds to the existing neighbourhood	Allotments are not in the form of a battle-axe arrangement.

Page 82 of 110 Printed on 11/08/2022

Tonoy24 Enquiry	
context.	
PO 8.2	DTS/DPF 8.2
Battle-axe development designed to allow safe and convenient movement.	The handle of a battle-axe development:
	(a) has a minimum width of 4m or
	(b) where more than 3 allotments are proposed, a minimum width of 5.5m.
PO 8.3	DTS/DPF 8.3
Battle-axe allotments and/or common land are of a suitable size and dimension to allow passenger vehicles to enter and exit and manoeuvre within the site in a safe and convenient manner.	Battle-axe development allows a B85 passenger vehicle to enter and exit parking spaces in no more than a three-point turn manoeuvre.
PO 8.4	DTS/DPF 8.4
Battle-axe or common driveways incorporate landscaping and permeability to improve appearance and assist in stormwater management.	Battle-axe or common driveways satisfy (a) and (b):
	(a) are constructed of a minimum of 50% permeable or porous material
	(b) where the driveway is located directly adjacent the side or rear boundary of the site, soft landscaping with a minimum dimension of 1m is provided between the driveway and site boundary (excluding along the perimeter of a passing point).
Major Land Divisio	on (20+ Allotments)
Open	Space
PO 9.1	DTS/DPF 9.1
Land division allocates or retains evenly distributed, high quality areas of open space to improve residential amenity and provide urban heat amelioration.	None are applicable.
PO 9.2	DTS/DPF 9.2
Land allocated for open space is suitable for its intended active and passive recreational use considering gradient and potential for inundation.	None are applicable.
PO 9.3	DTS/DPF 9.3
Land allocated for active recreation has dimensions capable of accommodating a range of active recreational activities.	None are applicable.
Water Sen:	sitive Design
	DTS/DPF 10.1
PO 10.1 Land division creating 20 or more residential allotments includes a stormwater	None are applicable.
management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	
PO 10.2	DTS/DPF 10.2
Land division creating 20 or more non-residential allotments includes a	None are applicable.
stormwater management system designed to mitigate peak flows and manage the rate and duration of stormwater discharges from the site to ensure that the development does not increase the peak flows in downstream systems.	
PO 10.3	DTS/DPF 10.3
Land division creating 20 or more allotments includes stormwater management systems that minimise the discharge of sediment, suspended solids, organic matter, nutrients, bacteria, litter and other contaminants to the stormwater system, watercourses or other water bodies.	None are applicable.
Solar O	rientation
PO 11.1	DTS/DPF 11.1
Land division creating 20 or more allotments for residential purposes facilitates solar access through allotment orientation and allotment dimensions.	

Page 83 of 110 Printed on 11/08/2022

Marinas and On-Water Structures

Assessment Provisions (AP)

Desired Outcome		
	Marinas and on-water structures are located and designed to minimise the impairment of commercial, recreational and navigational activities and adverse impacts on the environment.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Navigation	n and Safety
PO 1.1	DTS/DPF 1.1
Safe public access is provided or maintained to the waterfront, public infrastructure and recreation areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
The operation of wharves is not impaired by marinas and on-water structures.	None are applicable.
PO 1.3	DTS/DPF 1.3
Navigation and access channels are not impaired by marinas and on-water structures.	None are applicable.
PO 1.4	DTS/DPF 1.4
Commercial shipping lanes are not impaired by marinas and on-water structures.	Marinas and on-water structures are set back 250m or more from commercial shipping lanes.
PO 1.5	DTS/DPF 1.5
Marinas and on-water structures are located to avoid interfering with the operation or function of a water supply pumping station.	On-water structures are set back: (a) 3km or more from upstream water supply pumping station take-off points (b) 500m or more from downstream water supply pumping station take-off points.
PO 1.6	DTS/DPF 1.6
Maintenance of on-water infrastructure, including revetment walls, is not impaired by marinas and on-water structures.	None are applicable.
Environmer	tal Protection
PO 2.1	DTS/DPF 2.1
Development is sited and designed to facilitate water circulation and exchange.	None are applicable.

Open Space and Recreation

Assessment Provisions (AP)

Page 84 of 110 Printed on 11/08/2022

DO 1 Pleasant, functional and accessible open space and recreation facilities are provided at State, regional, district, neighbourhood and local levels for active and passive recreation, biodiversity, community health, urban cooling, tree canopy cover, visual amenity, gathering spaces, wildlife and waterway corridors, and a range of other functions and at a range of sizes that reflect the purpose of that open space.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use	and Intensity
PO 1.1	DTS/DPF 1.1
Recreation facilities are compatible with surrounding land uses and activities.	None are applicable.
PO 1.2	DTS/DPF 1.2
Open space areas include natural or landscaped areas using locally indigenous plant species and large trees.	None are applicable.
Design a	and Siting
PO 2.1	DTS/DPF 2.1
Open space and recreation facilities address adjacent public roads to optimise pedestrian access and visibility.	None are applicable.
PO 2.2	DTS/DPF 2.2
Open space and recreation facilities incorporate park furniture, shaded areas and resting places.	None are applicable.
PO 2.3	DTS/DPF 2.3
Open space and recreation facilities link habitats, wildlife corridors and existing open spaces and recreation facilities.	None are applicable.
Pedestrians	and Cyclists
PO 3.1	DTS/DPF 3.1
Open space incorporates:	None are applicable.
 (a) pedestrian and cycle linkages to other open spaces, centres, schools and public transport nodes; (b) safe crossing points where pedestrian routes intersect the road network; (c) easily identified access points. 	
Usa	Ibility
PO 4.1	DTS/DPF 4.1
Land allocated for open space is suitable for its intended active and passive recreational use taking into consideration its gradient and potential for inundation.	None are applicable.
Safety and Security	
PO 5.1	DTS/DPF 5.1
Open space is overlooked by housing, commercial or other development to provide casual surveillance where possible.	None are applicable.
PO 5.2	DTS/DPF 5.2
Play equipment is located to maximise opportunities for passive surveillance.	None are applicable.
PO 5.3	DTS/DPF 5.3

Page 85 of 110 Printed on 11/08/2022

Policy24 - Eriquily	
Landscaping provided in open space and recreation facilities maximises opportunities for casual surveillance throughout the park.	None are applicable.
PO 5.4	DTS/DPF 5.4
Fenced parks and playgrounds have more than one entrance or exit to minimise potential entrapment.	None are applicable.
PO 5.5	DTS/DPF 5.5
Adequate lighting is provided around toilets, telephones, seating, litter bins, bicycle storage, car parks and other such facilities.	None are applicable.
PO 5.6	DTS/DPF 5.6
Pedestrian and bicycle movement after dark is focused along clearly defined, adequately lit routes with observable entries and exits.	None are applicable.
Sig	nage
PO 6.1	DTS/DPF 6.1
Signage is provided at entrances to and within the open space and recreation facilities to provide clear orientation to major points of interest such as the location of public toilets, telephones, safe routes, park activities and the like.	None are applicable.
Buildings ar	I nd Structures
PO 7.1	DTS/DPF 7.1
Buildings and car parking areas in open space areas are designed, located and of a scale to be unobtrusive.	None are applicable.
PO 7.2	DTS/DPF 7.2
Buildings and structures in open space areas are clustered where practical to ensure that the majority of the site remains open.	None are applicable.
PO 7.3	DTS/DPF 7.3
Development in open space is constructed to minimise the extent of impervious surfaces.	None are applicable.
PO 7.4	DTS/DPF 7.4
Development that abuts or includes a coastal reserve or Crown land used for scenic, conservation or recreational purposes is located and designed to have regard to the purpose, management and amenity of the reserve.	None are applicable.
Lands	coning
PO 8.1	DTS/DPF 8.1
Open space and recreation facilities provide for the planting and retention of large trees and vegetation.	None are applicable.
PO 8.2	DTS/DPF 8.2
Landscaping in open space and recreation facilities provides shade and windbreaks:	None are applicable.
(a) along cyclist and pedestrian routes;(b) around picnic and barbecue areas;(c) in car parking areas.	
PO 8.3	DTS/DPF 8.3
Landscaping in open space facilitates habitat for local fauna and facilitates biodiversity.	None are applicable.
PO 8.4	DTS/DPF 8.4
Landscaping including trees and other vegetation passively watered with local rainfall run-off, where practicable.	None are applicable.

Page 86 of 110 Printed on 11/08/2022

Out of Activity Centre Development

Assessment Provisions (AP)

Desired Outcome	
DO1	The role of Activity Centres in contributing to the form and pattern of development and enabling equitable and convenient access to a range of
shopping, administrative, cultural, entertainment and other facilities in a single trip is maintained and reinforced.	

	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
		Designated Performance Feature
PO 1.1		DTS/DPF 1.1
	sidential development outside Activity Centres of a scale and type that of diminish the role of Activity Centres:	None are applicable.
(a)	as primary locations for shopping, administrative, cultural, entertainment and community services	
(b)	as a focus for regular social and business gatherings	
(c)	in contributing to or maintaining a pattern of development that supports equitable community access to services and facilities.	
PO 1.2		DTS/DPF 1.2
	activity centre non-residential development complements Activity s through the provision of services and facilities:	None are applicable.
(a)	that support the needs of local residents and workers, particularly in underserviced locations	
(b)	at the edge of Activities Centres where they cannot readily be accommodated within an existing Activity Centre to expand the range of services on offer and support the role of the Activity Centre.	

Resource Extraction

Assessment Provisions (AP)

	Desired Outcome
DO 1	Resource extraction activities are developed in a manner that minimises human and environmental impacts.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Land Use a	and Intensity
PO 1.1	DTS/DPF 1.1
Resource extraction activities minimise landscape damage outside of those areas unavoidably disturbed to access and exploit a resource and provide for the progressive reclamation and betterment of disturbed areas.	None are applicable.
PO 1.2	DTS/DPF 1.2
Resource extraction activities avoid damage to cultural sites or artefacts.	None are applicable.

Page 87 of 110 Printed on 11/08/2022

• • •	
Water	Quality
PO 2.1	DTS/DPF 2.1
Stormwater and/or wastewater from resource extraction activities is diverted into appropriately sized treatment and retention systems to enable reuse on site.	None are applicable.
Separation Treatments, Buffers and Landscaping	
PO 3.1	DTS/DPF 3.1
Resource extraction activities minimise adverse impacts upon sensitive receivers through incorporation of separation distances and/or mounding/vegetation.	None are applicable.
PO 3.2	DTS/DPF 3.2
Resource extraction activities are screened from view from adjacent land by perimeter landscaping and/or mounding.	None are applicable.

Site Contamination

Assessment Provisions (AP)

Desired Outcome Do 1 Ensure land is suitable for the proposed use in circumstances where it is, or may have been, subject to site contamination.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Ensure land is suitable for use when land use changes to a more sensitive use.	Development satisfies (a), (b), (c) or (d): (a) does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a more sensitive use (c) involves a change in the use of land to a more sensitive use on land at which site contamination is unlikely to exist (as demonstrated in a site contamination declaration form) (d) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: (i) a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that- A. site contamination does not exist (or no longer exists) at the land or B. the land is suitable for the proposed use or range of uses (without the need for any further remediation) or C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)
	and (ii) no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit

Page 88 of 110 Printed on 11/08/2022

report (as demonstrated in a site contamination declaration form).

Tourism Development

Assessment Provisions (AP)

Desired Outcome	
DO 1	Tourism development is built in locations that cater to the needs of visitors and positively contributes to South Australia's visitor economy.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

PO 1.1 Tourism development complements and contributes to local, natural, cultural or historical context where: (a) it supports immersive natural experiences (b) it showcases South Australia is landscapes and produce (c) its events and functions are connected to local food, wine and nature. PO 1.2 Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact. Carravan and Tourist Periss PO 2.1 Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures. PO 2.2 DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 DTS/DPF 2.2 None are applicable. PO 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Cong-term occupation does not displace tourist accommodation, particularly in limportant tourist destinations such as coastal and riverine locations.	Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Tourism development complements and contributes to local, natural, cultural or historical context where: (a) It supports immersive natural experiences (b) it showcases South Australia's landscapes and produce (c) its events and functions are connected to local food, wine and nature. PO 12 Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact. Caravan and Tourist Parks PO 2.1 Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures. PO 2.2 DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 Occupants are provided privacy and amenity through landscaping and fencing. DTS/DPF 2.3 Communal open space and centrally located recreation facilities are provided riguests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable. None are applicable.	Ge	neral
historical context where: (a) it supports immersive natural experiences (b) it showcases South Australia's landscapes and produce (c) its events and functions are connected to local food, wine and nature. PO 1.2 Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact. Caravan and Tourist Parks PO 2.1 Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures. PO 2.2 Occupants are provided privacy and amenity through landscaping and fencing. PO 2.3 Communal open space and centrally located recreation facilities are provided roguests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable. None are applicable.	PO 1.1	DTS/DPF 1.1
(b) it showcases South Australia's landscapes and produce (c) its events and functions are connected to local food, wine and nature. PO 12 Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact. Caravan and Tourist Parks PO 2.1 Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures. DTS/IDEF 2.1 None are applicable. DTS/IDEF 2.2 Occupants are provided privacy and amenity through landscaping and fencing. DTS/IDEF 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. DTS/IDEF 2.4 Portineter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 DTS/IDEF 2.6 None are applicable. DTS/IDEF 2.5 None are applicable. DTS/IDEF 2.5 None are applicable.	·	None are applicable.
Tourism development comprising multiple accommodation units (including any facilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact. Caravan and Tourist Parks PO 2.1 Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures. PO 2.2 Occupants are provided privacy and amenity through landscaping and fencing. PO 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Porimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable.	(b) it showcases South Australia's landscapes and produce	
tacilities and activities for use by guests and visitors) is clustered to minimise environmental and contextual impact. Caravan and Tourist Parks PO 2.1 Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures. PO 2.2 DTS/DPF 2.1 None are applicable. DTS/DPF 2.2 Occupants are provided privacy and amenity through landscaping and fencing. PO 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable.	PO 1.2	DTS/DPF 1.2
PO 2.1 Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures. PO 2.2 Occupants are provided privacy and amenity through landscaping and fencing. PO 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable. DTS/DPF 2.6 None are applicable. DTS/DPF 2.5 None are applicable.	facilities and activities for use by guests and visitors) is clustered to minimise	None are applicable.
Potential conflicts between long-term residents and short-term tourists are minimised through suitable siting and design measures. PO 2.2 Occupants are provided privacy and amenity through landscaping and fencing. PO 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable. None are applicable. None are applicable.	Caravan and	I Tourist Parks
minimised through suitable siting and design measures. PO 2.2 Occupants are provided privacy and amenity through landscaping and fencing. PO 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable.	PO 2.1	DTS/DPF 2.1
Occupants are provided privacy and amenity through landscaping and fencing. PO 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in		None are applicable.
fencing. PO 2.3 Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable. DTS/DPF 2.3 12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5 None are applicable. DTS/DPF 2.6 None are applicable.	PO 2.2	DTS/DPF 2.2
Communal open space and centrally located recreation facilities are provided for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable. 12.5% or more of a caravan park comprises clearly defined communal open space, landscaped areas and areas for recreation. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5 None are applicable.		None are applicable.
for guests and visitors. PO 2.4 Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. DTS/DPF 2.4 None are applicable. DTS/DPF 2.5 None are applicable. DTS/DPF 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable.	PO 2.3	DTS/DPF 2.3
Perimeter landscaping is used to enhance the amenity of the locality. PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. DTS/DPF 2.5 None are applicable. DTS/DPF 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable.		· · · · · · · · · · · · · · · · · · ·
PO 2.5 Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. DTS/DPF 2.5 None are applicable. DTS/DPF 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable.	PO 2.4	DTS/DPF 2.4
Amenity blocks (showers, toilets, laundry and kitchen facilities) are sufficient to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable.	Perimeter landscaping is used to enhance the amenity of the locality.	None are applicable.
to serve the full occupancy of the development. PO 2.6 Long-term occupation does not displace tourist accommodation, particularly in None are applicable.	PO 2.5	DTS/DPF 2.5
Long-term occupation does not displace tourist accommodation, particularly in None are applicable.		None are applicable.
	PO 2.6	DTS/DPF 2.6
		None are applicable.

Page 89 of 110 Printed on 11/08/2022

• • • •		
Tourist accommodation in areas constituted under the National Parks and Wildlife Act 1972		
PO 3.1	DTS/DPF 3.1	
Tourist accommodation avoids delicate or environmentally sensitive areas such as sand dunes, cliff tops, estuaries, wetlands or substantially intact strata of native vegetation (including regenerated areas of native vegetation lost through bushfire).	None are applicable.	
PO 3.2	DTS/DPF 3.2	
Tourist accommodation is sited and designed in a manner that is subservient to the natural environment and where adverse impacts on natural features, landscapes, habitats and cultural assets are avoided.	None are applicable.	
PO 3.3	DTS/DPF 3.3	
Tourist accommodation and recreational facilities, including associated access ways and ancillary structures, are located on cleared (other than where cleared as a result of bushfire) or degraded areas or where environmental improvements can be achieved.	None are applicable.	
PO 3.4	DTS/DPF 3.4	
Tourist accommodation is designed to prevent conversion to private dwellings through:	None are applicable.	
 (a) comprising a minimum of 10 accommodation units (b) clustering separated individual accommodation units (c) being of a size unsuitable for a private dwelling (d) ensuring functional areas that are generally associated with a private dwelling such as kitchens and laundries are excluded from, or physically separated from individual accommodation units, or are of a size unsuitable for a private dwelling. 		

Transport, Access and Parking

Assessment Provisions (AP)

	Desired Outcome
DO 1	A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Moveme	nt Systems
PO 1.1	DTS/DPF 1.1
Development is integrated with the existing transport system and designed to minimise its potential impact on the functional performance of the transport system.	None are applicable.
PO 1.2	DTS/DPF 1.2
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.
PO 1.3	DTS/DPF 1.3

Page 90 of 110 Printed on 11/08/2022

designated period gracios are appeared from passenger vehicle car parking areas to ensure efficient and sale movement and reinmisses potential conflict. PO 1.4 Development is dard and designed to that loading, unloading and turning of all trades avoids telerrupting the operation of and quesing on public roads and petiestrian paths. Options OTS-OFF 1.4 All vehicle manoeuving occurs onsite. TOTS-OFF 2.1 Sightlines all intersections, pudsetian and cycle crossings, and crossovers to allowers for motorists, cycletis and pediestrians are maintained or enhanced to resure safety for all road users and pediestrians. PO 2.2 Willis, fenong and landscaping adjacent to driveways and comer attes are designed to provide adequate agithmes between vehicles and pediestrians. PO 3.1 Salte and comernional access minimises impact or interruption on the operation of public roads. PO 3.1 Salte and comernional access minimises impact or interruption on the operation of public roads. OTS-OFF 3.1 The access points are saled and designed to accommodate the type and volume of public roads are also as also safely and without creating a hazard to pediestrians and other vehicular traffic. PO 3.3 Access points are located so as not to interfere with street trees, existing and extension of industrial traffic file by to be generated by the development or land use. PO 3.3 Access points are located so as not to interfere with street trees, existing and existing properties. PO 3.4 Access points are located so as not to interfere with street trees, existing and existing properties. PO 3.5 Consistency of inflastructure services to maintain the appearance of the development or inflastructure exists consist in provided from the intervent or an access point or an access point or an access point or an access point or inflastructure exists. District P. 3.4 Access points are located so as not to interfere with street trees, existing and venifier already or inflastructure exists or other access point or an access point or an access	- Chicy24 - Enquiry	
Development is afted and designed so that loading, unloading and turning of all protection paths. Signature	Industrial, commercial and service vehicle movements, loading areas and designated parking spaces are separated from passenger vehicle car parking areas to ensure efficient and safe movement and minimise potential conflict.	None are applicable.
Interestinate paths. Signatures PO21 Signatures DTSDEF 21 Signatures at intersections, pedestrian and cycle crossings, and crossovers to lone many adverse impacts of public roads. PO22 Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate significance between vehicles and pedestrians. Vehicle Access PO31 Safe and convenient access minimises impact or interruption on the operation of public roads. PO32 Development incorporating vehicular access ramps ensures vehicles can enter and exit a also safely and willhout creating a hazard to pedestrians and other vehicular traffic. PO33 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO34 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO34 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO34 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO34 Access points are sited and designed to minimise any adverse impacts on history or infrastructure services to maintain the appearance of the streets pecus, preserve local amently and minimise discuplin to utility ministructure assess. PO36 PO37 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO37 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO37 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO38 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO39 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO30 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO30 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO30 Access	PO 1.4	DTS/DPF 1.4
PO 21 Slightlines at intersections, pedestrian and cycle crossings, and crossovers to allowers for motorists, opolists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians. PO 22 Walls, frending and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians. Vehicle Access PO 31 Safe and convenient access minimises impact or interruption on the operation of public roads. PO 32 Development incorporating vehicular access ramps ensures vehicles can enter and cut a site safely and without creating a hazard to pedestrians and other vehicular traffic. PO 33 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. PO 34 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 35 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 36 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 37 PO 38 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 39 PO 30 DISOPF 34 None are applicable. DISOPF 35 OITSOPF 36 OITSOPF 36 OITSOPF 36 OITSOPF 36 OITSOPF 37 OITSOPF 36 None are applicable. DISOPF 36 OITSOPF 36 OITSOPF 37 OITSOPF 37 OITSOPF 38 None are applicable.	traffic avoids interrupting the operation of and queuing on public roads and	All vehicle manoeuvring occurs onsite.
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safely for all road users and pedestrians. PO 22	Sigh	ıttines
or ansure safely for all road users and pedestrians are maintained or enhanced to ensure safely for all road users and pedestrians. PO 22	PO 2.1	DTS/DPF 2.1
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians. Value Access FO 3.1 Safe and convenient access minimises impact or interruption on the operation of public roads. (a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing. FO 3.2 Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safety and without creating a hazard to pedestrians and other vehicular traffic. FO 3.3 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. FO 3.4 Access points are sited and designed to minimise any adverse impacts on meighbouring properties. FO 3.5 Access points are sited and designed to minimise any adverse impacts on meighbouring properties. FO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure services give or their stormwards or utility infrastructure services give or their stormwards or utility infrastructure services give or their stormwards or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the tase of the trunk of a street tree unless consent is provided from the tree owner for a lesser of situation. (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	None are applicable.
Verticle Access PO 3.1 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 3.4 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, sealing and weather shafetary) or infrastructure assets. PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, sealing and weather shafetary) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure evides on the transport of the service of the trunk of a street turniture, including directional signs, lighting, sealing and weather shafetary) or infrastructure services to maintain the appearance of the infrastructure services consent is provided from the tese consent is provided from the tree owner for a lesser distance (ii) Sm or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) Sm or more from the tangent point of an intersection of 2 or more roads (v) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	PO 2.2	DTS/DPF 2.2
Safe and convenient access minimises impact or interruption on the operation of public roads. (a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing. (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing. (a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing. (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing. (c) none are applicable. (d) None are applicable. (e) None are applicable. (e) None are applicable. (f) None are applicable. (e) None are applicable. (f) None are applicable. (g) Interstructure services part or authorised driveway or access point or an access point for which consent has been granted as part of an applicable. (e) None are applicable. (f) None are applicable. (g) Interstructure services part or authorised access point or an access point are sited and designed to minimise any adverse impacts on neighbouring properties. (g) None are applicable. (g) None are applicable. (g) None are applicable. (g) Interstructure services part or an access point or an access point or an access point or an access point are access to designated car parking spaces satisfy (a) or (b): is provided yill a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land. (g) None are applicable. (Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.
Safe and convenient access minimises impact or interruption on the operation of public roads. (a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing. PO 3.2 Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic. PO 3.3 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. PO 3.4 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure services pit, or other stormwater or utility infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the asset owner (iii) 3m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	Vehicle	Access
(a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing. PO 3.2 Development incorporating vehicular access ramps ensures vehicles can enter and exit a site sately and without creating a hazard to pedestrians and other vehicular traffic. PO 3.3 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. DTS/DPF 3.4 None are applicable. DTS/DPF 3.4 None are applicable. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): is provided via a lawfully existing or authorised driveway or access point or an access point for which consents been granted as part of an applicable. (a) is provided via a lawfully existing or authorised cross point or an access point for which consents been granted as part of an applicable. (b) where newly proposed, is set back: (c) 0. Sm or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure services pit, or other stormwater or utility infrastructure resonances point or many street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure resonances. (ii) 2 m or more from the base of the trunk of a street tree unless consent is provided from the trunk of a street tree unless consent is provided from the trunk of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossin	PO 3.1	DTS/DPF 3.1
(a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing. DTSIDPF 3.2 Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic. PO 3.3 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. DTSIDPF 3.3 None are applicable. DTSIDPF 3.4 None are applicable. DTSIDPF 3.4 None are applicable. DTSIDPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other street infrastructure unless consent is provided from the asset owner (ii) 2 m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	Safe and convenient access minimises impact or interruption on the operation	The access is:
PO 3.2 Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic. PO 3.3 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. DTS/DPF 3.3 None are applicable. DTS/DPF 3.4 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point or fland streetscape, preserve local amenity and minimise disruption to utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	or public roads.	or an access point for which consent has been granted as part of an application for the division of land
Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic. PO 3.3 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. PO 3.4 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.		
enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic. PO 3.3 Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. PO 3.4 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	PO 3.2	DTS/DPF 3.2
Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use. DTS/DPF 3.4 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. DTS/DPF 3.4 None are applicable. DTS/DPF 3.4 None are applicable. DTS/DPF 3.4 None are applicable. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic.	None are applicable.
traffic likely to be generated by the development or land use. PO 3.4 Access points are sited and designed to minimise any adverse impacts on neighbouring properties. PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	PO 3.3	DTS/DPF 3.3
Access points are sited and designed to minimise any adverse impacts on neighbouring properties. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use.	None are applicable.
PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets. DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	PO 3.4	DTS/DPF 3.4
Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets. Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the tree owner for a lesser distance (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	Access points are sited and designed to minimise any adverse impacts on neighbouring properties.	None are applicable.
street furniture (including directional signs, lighting, seating as the total streets are furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets. (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.	PO 3.5	DTS/DPF 3.5
PO 3.6 DTS/DPF 3.6	Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets.	(a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of 2 or more roads (iv) outside of the marked lines or infrastructure dedicating a
	PO 3.6	DTS/DPF 3.6

Page 91 of 110 DTS/DPF 3.6

Printed on 11/08/2022

Driveways and access points are separated and minimised in number to optimise the provision of on-street visitor parking (where on-street parking is appropriate).	Driveways and access points: (a) for sites with a frontage to a public road of 20m or less, one access point no greater than 3.5m in width is provided (b) for sites with a frontage to a public road greater than 20m: (i) a single access point no greater than 6m in width is provided or (ii) not more than two access points with a width of 3.5m each are provided.
PO 3.7 Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.	DTS/DPF 3.7 Development does not involve a new or modified access or cause an increase in traffic through an existing access that is located within the following distance from a railway crossing: (a) 80 km/h road - 110m (b) 70 km/h road - 90m (c) 60 km/h road - 70m (d) 50km/h or less road - 50m.
PO 3.8 Driveways, access points, access tracks and parking areas are designed and constructed to allow adequate movement and manoeuvrability having regard to the types of vehicles that are reasonably anticipated.	DTS/DPF 3.8 None are applicable.
PO 3.9 Development is designed to ensure vehicle circulation between activity areas occurs within the site without the need to use public roads.	DTS/DPF 3.9 None are applicable.
Access for Peop	le with Disabilities
PO 4.1	DTS/DPF 4.1
Development is sited and designed to provide safe, dignified and convenient access for people with a disability.	None are applicable.
Vehicle Pa	I rrking Rates
PO 5.1	DTS/DPF 5.1
Sufficient on-site vehicle parking and specifically marked accessible car parking places are provided to meet the needs of the development or land use having regard to factors that may support a reduced on-site rate such as: (a) availability of on-street car parking (b) shared use of other parking areas (c) in relation to a mixed-use development, where the hours of operation of commercial activities complement the residential use of the site, the provision of vehicle parking may be shared (d) the adaptive reuse of a State or Local Heritage Place.	Development provides a number of car parking spaces on-site at a rate no less than the amount calculated using one of the following, whichever is relevant: (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
Vakida R	vising Areas
PO 6.1	DTS/DPF 6.1
Vehicle parking areas are sited and designed to minimise impact on the operation of public roads by avoiding the use of public roads when moving from one part of a parking area to another.	Movement between vehicle parking areas within the site can occur without the need to use a public road.
PO 6.2 Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced, and the like.	DTS/DPF 6.2 None are applicable.
PO 6.3	DTS/DPF 6.3

Page 92 of 110 Printed on 11/08/2022

- Enquiry	
Vehicle parking areas are designed to provide opportunity for integration and shared-use of adjacent car parking areas to reduce the total extent of vehicle parking areas and access points.	None are applicable.
PO 6.4	DTS/DPF 6.4
Pedestrian linkages between parking areas and the development are provided and are safe and convenient.	None are applicable.
PO 6.5	DTS/DPF 6.5
Vehicle parking areas that are likely to be used during non-daylight hours are provided with sufficient lighting to entry and exit points to ensure clear visibility to users.	None are applicable.
PO 6.6	DTS/DPF 6.6
Loading areas and designated parking spaces for service vehicles are provided within the boundary of the site.	Loading areas and designated parking spaces are wholly located within the site.
PO 6.7	DTS/DPF 6.7
On-site visitor parking spaces are sited and designed to be accessible to all visitors at all times.	None are applicable.
Undercroft and Below Ground 0	I Baraging and Parking of Vehicles
PO 7.1	DTS/DPF 7.1
Undercroft and below ground garaging of vehicles is designed to enable safe entry and exit from the site without compromising pedestrian or cyclist safety or causing conflict with other vehicles.	None are applicable.
Internal Roads and Parking Areas in Resid	lential Parks and Caravan and Tourist Parks
PO 8.1	DTS/DPF 8.1
Internal road and vehicle parking areas are surfaced to prevent dust becoming a nuisance to park residents and occupants.	None are applicable.
PO 8.2	DTS/DPF 8.2
Traffic circulation and movement within the park is pedestrian friendly and promotes low speed vehicle movement.	None are applicable.
Bicycle Parking in	Designated Areas
PO 9.1	DTS/DPF 9.1
The provision of adequately sized on-site bicycle parking facilities encourages cycling as an active transport mode.	Areas and / or fixtures are provided for the parking and storage of bicycles at a rate not less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.
PO 9.2	DTS/DPF 9.2
Bicycle parking facilities provide for the secure storage and tethering of bicycles in a place where casual surveillance is possible, is well lit and signed for the safety and convenience of cyclists and deters property theft.	None are applicable.
PO 9.3	DTS/DPF 9.3
Non-residential development incorporates end-of-journey facilities for employees such as showers, changing facilities and secure lockers, and signage indicating the location of the facilities to encourage cycling as a mode of journey-to-work transport.	None are applicable.
Corner	Cut-Offs
PO 10.1	DTS/DPF 10.1
Development is located and designed to ensure drivers can safely turn into and out of public road junctions.	Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram:

Page 93 of 110 Printed on 11/08/2022

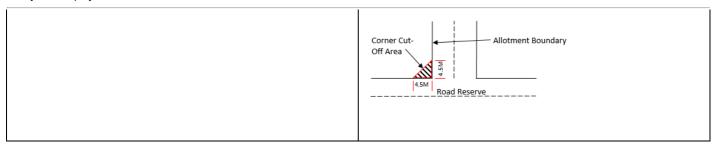


Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate (unless varied by Table 2 onwards)
	Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.
Residential Development	
Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Group Dwelling	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Residential Flat Building	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Row Dwelling where vehicle access is from the primary street	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
,	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Row Dwelling where vehicle access is not from the primary street (i.e. rear-loaded)	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
,	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Semi-Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Aged / Supported Accommodation	
Retirement village	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.
	0.2 spaces per dwelling for visitor parking.

Page 94 of 110 Printed on 11/08/2022

Supported accommodation	0.3 spaces per bed.	
Residential Development (Other)		
Ancillary accommodation	No additional requirements beyond those associated with the main dwelling.	
Residential park	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling. Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2	
	spaces per dwelling. 0.2 spaces per dwelling for visitor parking.	
Student accommodation	0.3 spaces per bed.	
Workers' accommodation	0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.	
Tourist		
Tourist		
Caravan park / tourist park	Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.	
	Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.	
	A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.	
Tourist accommodation	1 car parking space per accommodation unit / guest room.	
Commercial Uses		
Auction room/ depot	1 space per 100m ² of building floor area plus an additional 2 spaces.	
Automotive collision repair	3 spaces per service bay.	
Call centre	8 spaces per 100m ² of gross leasable floor area.	
Motor repair station	3 spaces per service bay.	
Office	4 spaces per 100m ² of gross leasable floor area.	
Retail fuel outlet	3 spaces per 100m ² gross leasable floor area.	
Service trade premises	2.5 spaces per 100m ² of gross leasable floor area	
	1 space per 100m ² of outdoor area used for display purposes.	
Shop (no commercial kitchen)	5.5 spaces per 100m ² of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.	
	5 spaces per 100m ² of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.	
Shop (in the form of a bulky goods outlet)	2.5 spaces per 100m ² of gross leasable floor area.	
Shop (in the form of a restaurant or involving a	Premises with a dine-in service only (which may include a take-away component with no drive-	

Page 95 of 110 Printed on 11/08/2022

- Charles	
commercial kitchen)	through) - 0.4 spaces per seat.
	Premises with take-away service but with no seats - 12 spaces per 100m ² of total floor area plus
	a drive-through queue capacity of ten vehicles measured from the pick-up point.
	Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.
Community and Civic Uses	
Childcare centre	0.25 spaces per child
Library	4 spaces per 100m ² of total floor area.
Community facility	10 spaces per 100m ² of total floor area.
Hall / meeting hall	0.2 spaces per seat.
Place of worship	1 space for every 3 visitor seats.
Pre-school	1 per employee plus 0.25 per child (drop off/pick up bays)
Educational establishment	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.
	For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.
Health Related Uses	
Hospital	4.5 spaces per bed for a public hospital.
	1.5 spaces per bed for a private hospital.
Consulting room	4 spaces per consulting room excluding ancillary facilities.
Recreational and Entertainment Uses	
Cinema complex	0.2 spaces per seat.
Concert hall / theatre	0.2 spaces per seat.
Hotel	1 space for every 2m ² of total floor area in a public bar plus 1 space for every 6m ² of total floor area available to the public in a lounge, beer garden plus 1 space per 2 gaming machines, plus 1 space per 3 seats in a restaurant.
Indoor recreation facility	6.5 spaces per 100m ² of total floor area for a Fitness Centre
	4.5 spaces per 100m ² of total floor area for all other Indoor recreation facilities.
Industry/Employment Uses	
Fuel depot	1.5 spaces per 100m ² total floor area

Page 96 of 110 Printed on 11/08/2022

	1 spaces per 100m ² of outdoor area used for fuel depot activity purposes.
Industry	1.5 spaces per 100m ² of total floor area.
Store	0.5 spaces per 100m ² of total floor area.
Timber yard	1.5 spaces per 100m ² of total floor area
	1 space per 100m ² of outdoor area used for display purposes.
Warehouse	0.5 spaces per 100m ² total floor area.
Other Uses	
Funeral Parlour	1 space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.
Radio or Television Station	5 spaces per 100m ² of total building floor area.

Table 2 - Off-Street Car Parking Requirements in Designated Areas

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column subject to the following:

- (a) the location of the development is unable to satisfy the requirements of Table 2 Criteria (other than where a location is exempted from the application of those criteria)
- (b) the development satisfies Table 2 Criteria (or is exempt from those criteria) and is located in an area where a lawfully established carparking fund operates, in which case the number of spaces are reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.		Designated Areas
	Minimum number of spaces	Maximum number of spaces	
Development generally			
All classes of development	No minimum.	No maximum except in the Primary Pedestrian Area identified in the Primary Pedestrian Area Concept Plan, where the maximum is: 1 space for each dwelling with a total floor area less than 75 square metres 2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres 3 spaces for each dwelling with a total floor area greater than 150 square metres. Residential flat building or Residential component of a multi-storey building: 1 visitor space for each 6 dwellings.	Capital City Zone City Main Street Zone City Riverbank Zone Adelaide Park Lands Zone Business Neighbourhood Zone (within the City of Adelaide) The St Andrews Hospital Precinct Subzone and Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone
Non-residential development			

Page 97 of 110 Printed on 11/08/2022

Non-residential development excluding tourist accommodation Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area. 3 spaces per 100m ² of gross leasable floor area.	5 spaces per 100m ² of gross leasable floor area. 6 spaces per 100m ² of gross leasable floor area.	City Living Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone Strategic Innovation Zone Suburban Activity Centre Zone Business Neighbourhood Zone Suburban Main Street Zone Urban Activity Centre Zone
Tourist accommodation	1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4 bedrooms over 100 bedrooms	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential development			
Residential component of a multi-storey building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Strategic Innovation Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential flat building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone

Page 98 of 110 Printed on 11/08/2022

Table 2 - Criteria:

The following criteria are used in conjunction with Table 2. The 'Exception' column identifies locations where the criteria do not apply and the car parking rates in Table 2 are applicable.

Criteria	Exceptions
The designated area is wholly located within Metropolitan Adelaide and any part of the development site satisfies one or more of the following: (a) is within 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service ⁽²⁾ (b) is within 400 metres of a bus interchange ⁽¹⁾ (c) is within 400 metres of an O-Bahn interchange ⁽¹⁾ (d) is within 400 metres of a passenger rail station ⁽¹⁾ (e) is within 400 metres of a passenger tram station ⁽¹⁾ (f) is within 400 metres of the Adelaide Parklands.	 (a) All zones in the City of Adelaide (b) Strategic Innovation Zone in the following locations: (i) City of Burnside (ii) City of Marion (iii) City of Mitcham (c) Urban Corridor (Boulevard) Zone (d) Urban Corridor (Business) Zone (e) Urban Corridor (Living) Zone (f) Urban Corridor (Main Street) Zone (g) Urban Neighbourhood Zone

[NOTE(S): (1)Measured from an area that contains any platform(s), shelter(s) or stop(s) where people congregate for the purpose waiting to board a bus, tram or train, but does not include areas used for the parking of vehicles. (2) A high frequency public transit service is a route serviced every 15 minutes between 7.30am and 6.30pm Monday to Friday and every 30 minutes at night, Saturday, Sunday and public holidays until 10pm.]

Table 3 - Off-Street Bicycle Parking Requirements

The bicycle parking rates apply within designated areas located within parts of the State identified in the Schedule to Table 3.

Class of Development	Bicycle Parking Rate Where a development comprises more than one development type, then the overall bicycle parking rate will be taken to be the sum of the bicycle parking rates for each development type.
Consulting Room	1 space per 20 employees plus 1 space per 20 consulting rooms for customers.
Educational establishment	For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors. For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students.
Hospital	1 space per 15 beds plus 1 space per 30 beds for visitors.
Indoor recreation facility	1 space per 4 employees plus 1 space per 200m ² of gross leasable floor area for visitors.
Licensed Premises	1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area.
Office	1 space for every 200m ² of gross leasable floor area plus 2 spaces plus 1 space per 1000m ² of gross leasable floor area for visitors.
Pre-school	1 space per 20 full time employees plus 1 space per 40 full time children.
Recreation area	1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers.
Residential flat building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors.

Page 99 of 110 Printed on 11/08/2022

Residential component of a multi-storey building	Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors.
Shop	1 space for every 300m ² of gross leasable floor area plus 1 space for every 600m ² of gross leasable floor area for customers.
Tourist accommodation	1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.

Schedule to Table 3

Designated Area	Relevant part of the State The bicycle parking rate applies to a designated area located in a relevant part of the State described below.
All zones	City of Adelaide
Business Neighbourhood Zone	Metropolitan Adelaide
Strategic Innovation Zone	
Suburban Activity Centre Zone	
Suburban Business Zone	
Suburban Main Street Zone	
Urban Activity Centre Zone	
Urban Corridor (Boulevard) Zone	
Urban Corridor (Business) Zone	
Urban Corridor (Living) Zone	
Urban Corridor (Main Street) Zone	
Urban Neighbourhood Zone	

Waste Treatment and Management Facilities

Assessment Provisions (AP)

	Desired Outcome
DO 1	Mitigation of the potential environmental and amenity impacts of waste treatment and management facilities.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Siting		
PO 1.1	DTS/DPF 1.1	
Waste treatment and management facilities incorporate separation distances	None are applicable.	

Page 100 of 110 Printed on 11/08/2022

Policy24 - Eriquity			
and attenuation measures within the site between waste operations areas (including all closed, operating and future cells) and sensitive receivers and sensitive environmental features to mitigate off-site impacts from noise, air and dust emissions.			
Soil and Water Protection			
PO 2.1	DTS/DPF 2.1		
Soil, groundwater and surface water are protected from contamination from waste treatment and management facilities through measures such as:	None are applicable.		
containing potential groundwater and surface water contaminants within waste operations areas diverting clean stormwater away from waste operations areas and potentially contaminated areas providing a leachate barrier between waste operations areas and underlying soil and groundwater.			
PO 2.2	DTS/DPF 2.2		
Wastewater lagoons are set back from watercourses to minimise environmental harm and adverse effects on water resources.	Wastewater lagoons are set back 50m or more from watercourse banks.		
PO 2.3	DTS/DPF 2.3		
Wastewater lagoons are designed and sited to:	None are applicable.		
avoid intersecting underground waters; avoid inundation by flood waters; ensure lagoon contents do not overflow; include a liner designed to prevent leakage.			
PO 2.4	DTS/DPF 2.4		
Waste operations areas of landfills and organic waste processing facilities are set back from watercourses to minimise adverse impacts on water resources.	Waste operations areas are set back 100m or more from watercourse banks.		
Am	enity		
PO 3.1	DTS/DPF 3.1		
Waste treatment and management facilities are screened, located and designed to minimise adverse visual impacts on amenity.	None are applicable.		
PO 3.2	DTS/DPF 3.2		
Access routes to waste treatment and management facilities via residential streets is avoided.	None are applicable.		
PO 3.3	DTS/DPF 3.3		
Litter control measures minimise the incidence of windblown litter.	None are applicable.		
PO 3.4	DTS/DPF 3.4		
Waste treatment and management facilities are designed to minimise adverse impacts on both the site and surrounding areas from weed and vermin infestation.	None are applicable.		
Access			
PO 4.1	DTS/DPF 4.1		
Traffic circulation movements within any waste treatment or management site are designed to enable vehicles to enter and exit the site in a forward direction.	None are applicable.		
PO 4.2	DTS/DPF 4.2		
Suitable access for emergency vehicles is provided to and within waste treatment or management sites.	None are applicable.		
	ı		

Page 101 of 110 Printed on 11/08/2022

Policy24 - Enquiry		
Fencing and Security		
PO 5.1	DTS/DPF 5.1	
Security fencing provided around waste treatment and management facilities prevents unauthorised access to operations and potential hazard to the public.	Chain wire mesh or pre-coated painted metal fencing 2m or more in height is erected along the perimeter of the waste treatment or waste management facility site.	
Lai	ndfill	
PO 6.1	DTS/DPF 6.1	
Landfill gas emissions are managed in an environmentally acceptable manner.	None are applicable.	
PO 6.2	DTS/DPF 6.2	
Landfill facilities are separated from areas of environmental significance and land used for public recreation and enjoyment.	Landfill facilities are set back 250m or more from a public open space reserve, forest reserve, national park or Conservation Zone.	
PO 6.3	DTS/DPF 6.3	
Landfill facilities are located on land that is not subject to land slip.	None are applicable.	
PO 6.4	DTS/DPF 6.4	
Landfill facilities are separated from areas subject to flooding.	Landfill facilities are set back 500m or more from land inundated in a 1% AEP flood event.	
Organic Waste Processing Facilities		
PO 7.1	DTS/DPF 7.1	
Organic waste processing facilities are separated from the coast to avoid potential environment harm.	Organic waste processing facilities are set back 500m or more from the coastal high water mark.	
PO 7.2	DTS/DPF 7.2	
Organic waste processing facilities are located on land where the engineered liner and underlying seasonal water table cannot intersect.	None are applicable.	
PO 7.3	DTS/DPF 7.3	
Organic waste processing facilities are sited away from areas of environmental significance and land used for public recreation and enjoyment.	Organic waste processing facilities are set back 250m or more from a public open space reserve, forest reserve, national park or a Conservation Zone.	
PO 7.4	DTS/DPF 7.4	
Organic waste processing facilities are located on land that is not subject to land slip.	None are applicable.	
PO 7.5	DTS/DPF 7.5	
Organic waste processing facilities separated from areas subject to flooding.	Organic waste processing facilities are set back 500m or more from land inundated in a 1% AEP flood event.	
Major Wastewater Treatment Facilities		
PO 8.1	DTS/DPF 8.1	
Major wastewater treatment and disposal systems, including lagoons, are designed to minimise potential adverse odour impacts on sensitive receivers, minimise public and environmental health risks and protect water quality.	None are applicable.	
PO 8.2	DTS/DPF 8.2	
Artificial wetland systems for the storage of treated wastewater are designed and sited to minimise potential public health risks arising from the breeding of mosquitoes.	None are applicable.	

Workers' accommodation and Settlements

Assessment Provisions (AP)

Page 102 of 110 Printed on 11/08/2022

	Desired Outcome
DO 1	Appropriately designed and located accommodation for seasonal and short-term workers in rural areas that minimises environmental and social impacts.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Workers' accommodation and settlements are obscured from scenic routes, tourist destinations and areas of conservation significance or otherwise designed to complement the surrounding landscape.	None are applicable.
PO 1.2	DTS/DPF 1.2
Workers' accommodation and settlements are sited and designed to minimise nuisance impacts on the amenity of adjacent users of land.	None are applicable.
PO 1.3	DTS/DPF 1.3
Workers' accommodation and settlements are built with materials and colours that blend with the landscape.	None are applicable.
PO 1.4	DTS/DPF 1.4
Workers' accommodation and settlements are supplied with service infrastructure such as power, water and effluent disposal sufficient to satisfy the living requirements of workers.	None are applicable.

No criteria applies to this land use. Please check the definition of the land use for further detail.

Page 103 of 110 Printed on 11/08/2022

Page 104 of 110 Printed on 11/08/2022

Page 105 of 110 Printed on 11/08/2022

Page 106 of 110 Printed on 11/08/2022

Page 107 of 110 Printed on 11/08/2022

Page 108 of 110 Printed on 11/08/2022

Page 109 of 110 Printed on 11/08/2022

Page 110 of 110 Printed on 11/08/2022

1390-1400 GOLDEN GROVE RD GOLDEN GROVE SA 5125

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Overlay

Defence Aviation Area (All structures over 15 metres)

Hazards (Flooding)

Major Urban Transport Routes

Prescribed Wells Area

Regulated and Significant Tree

Traffic Generating Development

Water Resources

Zone

Local Activity Centre

Selected Development(s)

Office

This development may be subject to multiple assessment pathways. Please review the document below to determine which pathway may be applicable based on the proposed development compliances to standards.

If no assessment pathway is shown this mean the proposed development will default to performance assessed. Please contact your local council in this instance. Refer to Part 1 - Rules of Interpretation - Determination of Classes of Development

Property Policy Information for above selection

Office - Code Assessed - Performance Assessed

Part 2 - Zones and Sub Zones

Local Activity Centre Zone

Assessment Provisions (AP)

	Desired Outcome
DO 1	A range of small-scale shops, offices, business, health and community facilities to provide daily services to and support walkable neighbourhoods.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Page 1 of 37 Printed on 11/08/2022

Performance Outcome	Deemed-to-Satisfy Criteria /
	Designated Performance Feature
Land Use a	nd Intensity
P0 1.1	DTS/DPF 1.1
Retail, office, health and community facilities, services and other businesses provide a range of goods and services to the local community.	Development comprises one or more of the following: (a) Advertisement (b) Community facility (c) Consulting room (d) Dwelling (e) Office (f) Pre-school (g) Shop
PO 1.4	DTS/DPF 1.4
Development sited and designed to achieve vibrant and interesting streetscapes.	None are applicable.
Built Form a	nd Character
PO 2.1	DTS/DPF 2.1
Development complements adjacent development within the zone, and mitigates interface impacts on adjoining residential uses in a neighbourhood type zone, through appropriate building siting, scale and design.	None are applicable.
PO 2.2	DTS/DPF 2.2
Buildings are sited and designed to create pedestrian, vehicular and visual linkages between the various built-form elements within the zone and adjoining main roads.	None are applicable.
Building heigh	t and setbacks
P0 3.1	DTS/DPF 3.1
Building height is consistent with the form expressed in any relevant Maximum Building Height Levels Technical and Numeric Variation and Maximum Building Height Metres Technical and Numeric Variation, and otherwise generally of a low rise that complements the established streetscape and local character.	Building height is not greater than: (a) the following: (b) in all other cases (i.e. there are blank fields for both maximum building height (metres) and maximum building height (levels)) - 2 building levels up to a height of 8m. In relation to DTS/DPF 3.1, in instances where: (c) more than one value is returned in the same field for DTS/DPF 3.1(a), refer to the Maximum Building Height (Metres) Technical and Numeric Variation layer or Maximum Building Height (Levels) Technical and Numeric Variation layer in the SA planning database to determine the applicable value relevant to the site of the proposed development (d) only one value is returned for DTS/DPF 3.1(a) (i.e. there is one blank field), then the relevant height in metres or building levels applies with no criteria for the other.
P0 3.2	DTS/DPF 3.2
Buildings mitigate visual impacts of massing on residential development within a neighbourhood-type zone.	Buildings are constructed within a building envelope provided by a 45 degree plane measured from a height of 3m above natural ground level at the boundary of an allotment used for residential purposes in a neighbourhood-type zone as shown in the following diagram (except where this boundary is a southern boundary or where this boundary is the primary street boundary):

Page 2 of 37 Printed on 11/08/2022

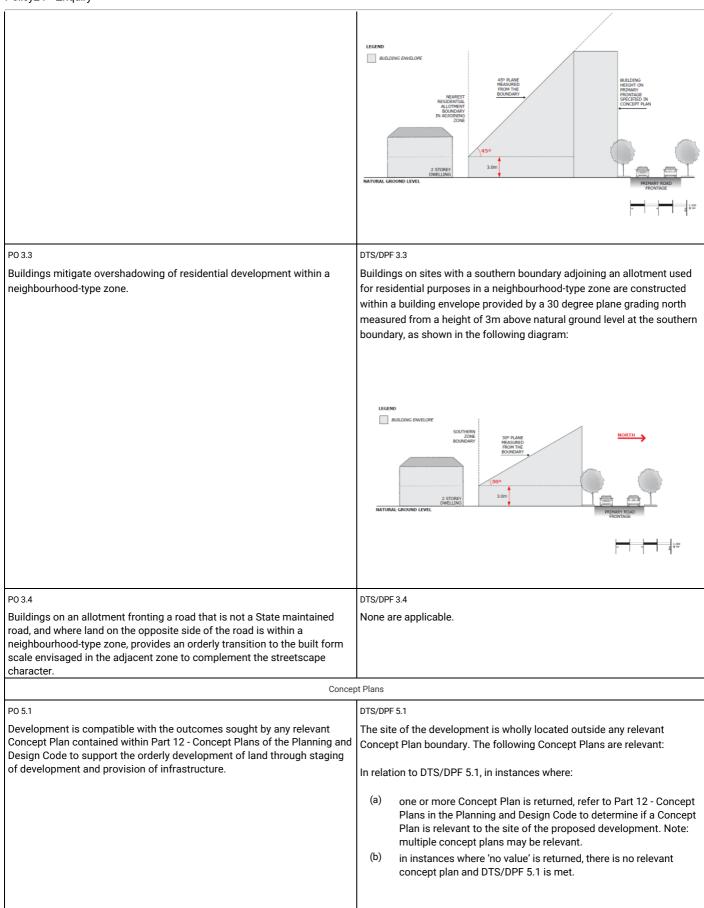


Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

Page 3 of 37 Printed on 11/08/2022

Notification tables exclude the classes of development listed in Column A from notification provided that they do not fall within a corresponding exclusion prescribed in Column B.

Where a development or an element of a development falls within more than one class of development listed in Column A, it will be excluded from notification if it is excluded (in its entirety) under any of those classes of development. It need not be excluded under all applicable classes of development.

Where a development involves multiple performance assessed elements, all performance assessed elements will require notification (regardless of whether one or more elements are excluded in the applicable notification table) unless every performance assessed element of the application is excluded in the application table, in which case the application will not require notification.

Class	of Development	Exceptions
(Colum	ın A)	(Column B)
1.	Development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development.	None specified.
2.	Any kind of development where the site of the development is not adjacent land to a site (or land) used for residential purposes in a neighbourhood-type zone.	Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.
3.	Any development involving any of the following (or of any combination of any of the following): (a) advertisement (b) air handling unit, air conditioning system or exhaust fan (c) building work on railway land (d) community facility (e) consulting room (f) deck (g) dwelling (h) fence (i) land division (j) office (k) retaining wall (l) shade sail (m) shop (n) solar photovoltaic panels (roof mounted) (o) verandah (p) water tank.	Except development that exceeds the maximum building height specified in Local Activity Centre Zone DTS/DPF 3.1 or does not satisfy any of the following: 1. Local Activity Centre Zone DTS/DPF 3.2 2. Local Activity Centre Zone DTS/DPF 3.3.
4.	Any development involving any of the following (or of any combination of any of the following): (a) internal building works (b) replacement building (c) temporary accommodation in an area affected by bushfire (d) tree damaging activity.	None specified.
5.	Demolition.	Except any of the following: 1. the demolition of a State or Local Heritage Place 2. the demolition of a building (except an ancillary building) in a Historic Area Overlay.

Placement of Notices - Exemptions for Performance Assessed Development

Page 4 of 37 Printed on 11/08/2022

None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

Part 3 - Overlays

Defence Aviation Area Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Management of potential impacts of buildings on the operational and safety requirements of Defence Aviation Areas.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
PO 1.1 Building height does not pose a hazard to the operations of Defence Aviation Areas.	DTS/DPF 1.1 Building height does not exceed the relevant height specified by the Defence Aviation Area Overlay.
PO 1.2 Exhaust stacks are designed and sited to minimise plume impacts on aircraft movements associated with Defence Aviation Areas.	DTS/DPF 1.2 Development does not include exhaust stacks.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

•	Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
I	None	None	None	None

Hazards (Flooding) Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Impacts on people, property, infrastructure and the environment from high flood risk are minimised by retaining areas free from development, and minimising intensification where development has occurred.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Flood Resilience		
P0 3.1	DTS/DPF 3.1	

Page 5 of 37 Printed on 11/08/2022

Development avoids the need for flood protection works.	None are applicable.
PO 3.2	DTS/DPF 3.2
Development does not cause unacceptable impacts on any adjoining property by the diversion of flood waters or an increase in flood velocity or flood level.	None are applicable.
PO 3.3	DTS/DPF 3.3
Development does not impede the flow of floodwaters through the allotment or the surrounding land, or cause an unacceptable loss of flood storage.	None are applicable.
P0 3.4	DTS/DPF 3.4
Development avoids frequently flooded or high velocity areas, other than where it is part of a flood mitigation scheme to reduce flood impact.	Other than a recreation area, development is located outside of the 5% AEP principal flow path.
PO 3.5	DTS/DPF 3.5
Buildings are sited, designed and constructed to prevent the entry of floodwaters in a 1% AEP flood event where the entry of floodwaters is likely to result in undue damage to, or compromise ongoing activities within, buildings.	Buildings comprise one of the following: (a) a porch or portico with at least 2 open sides (b) a verandah with at least 3 open sides (c) a carport or outbuilding with at least 2 open sides (whichever elevations face the direction of the flow) (d) any post construction with open sides (e) a building with a finished floor level that is at least 300mm above the height of a 1% AEP flood event.
Environment	tal Protection
PO 4.1	DTS/DPF 4.1
Buildings and structures used either partly or wholly to contain or store hazardous materials are designed to prevent spills or leaks leaving the confines of the building during a 1% AEP flood event to avoid potential environmental harm.	Development involving the storage or disposal of hazardous materials is wholly located outside of the 1% AEP flood plain or flow path.
PO 4.2	DTS/DPF 4.2
Development does not create or aggravate the potential for erosion or siltation or lead to the destruction of vegetation during a flood.	None are applicable.
Site Ear	thworks
P0 5.1	DTS/DPF 5.1
The depth and extent of filling required to raise the finished floor level of a building does not cause unacceptable impact on any adjoining property by diversion of flood waters, an increase in flood velocity or flood level, or an unacceptable loss of flood storage.	None are applicable.
PO 5.2	DTS/DPF 5.2
Driveways, access tracks and parking areas are designed and constructed to minimise excavation and filling.	Filling for ancillary purposes: (a) does not exceed 300mm above existing ground level (b) is no more than 5m wide.
Acc	cess
PO 6.1	DTS/DPF 6.1
Development does not occur on land: (a) from which evacuation to areas not vulnerable to flood risk is not	None are applicable.
possible during a 1% AEP flood event (b) which cannot be accessed by emergency services vehicles or	

Page 6 of 37 Printed on 11/08/2022

essential utility service vehicles during a 1% AEP flood event.	
P0 6.2	DTS/DPF 6.2
Access driveways and tracks to significant development (i.e. dwellings, places of work, etc.) consist of a safe, all-weather trafficable surface that is accessible during a 1% AEP flood event.	None are applicable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Major Urban Transport Routes Overlay

Assessment Provisions (AP)

	Desired Outcome	
DO 1	Safe and efficient operation of Major Urban Transport Routes for all road users.	
DO 2	Provision of safe and efficient access to and from Major Urban Transport Routes.	

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance	Deemed-to-Satisfy Criteria / Designated Performance Feature
Outcome	
	Access - Safe Entry and Exit (Traffic Flow)
P0 1.1	DTS/DPF 1.1
Access is designed to allow safe entry and exit	An access point satisfies (a), (b) or (c):
to and from a site to meet	(a) where servicing a single (1) residential dwelling / residential allotment:
the needs of development	(i) it will not result in more than one access point
and minimise traffic flow	(ii) vehicles can enter and exit the site in a forward direction
interference associated	(iii) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees
with access movements along adjacent State	(iv) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane o the road
Maintained Roads.	(v) have a width of between 3m and 4m (measured at the site boundary).
	(b) where the development will result in 2 and up to 6 dwellings:
	(i) it will not result in more than one access point servicing the development site
	(ii) entry and exit movements are left turn only
	(iii) vehicles can enter and exit the site in a forward direction
	(iv) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees;
	(v) passenger vehicles (with a length up to 5.2m) can enter and exit the site wholly within the kerbside lane o the road
	(vi) have a width of between 5.8m to 6m (measured at the site boundary) and an access depth of 6m (measured from the site boundary into the site).
	(c) where the development will result in over 7 dwellings, or is a non-residential land use:
	(i) it will not result in more than one access point servicing the development site
	(ii) vehicles can enter and exit the site using left turn only movements
	(iii) vehicles can enter and exit the site in a forward direction
	(iv) vehicles can cross the property boundary at an angle between 70 degrees and 90 degrees

Page 7 of 37 Printed on 11/08/2022

- (v) have a width of between 6m and 7m (measured at the site boundary), where the development is expected to accommodate vehicles with a length of 6.4m or less
- (vi) have a width of between 6m and 9m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 6.4m to 8.8m
- (vii) have a width of between 9m and 12m (measured at the site boundary), where the development is expected to accommodate vehicles with a length from 8.8m to 12.5m
- (viii) provides for simultaneous two-way vehicle movements at the access;
 - A. with entry and exit movements for vehicles with a length up to 5.2m vehicles being fully within the kerbside lane of the road

and

B. with entry movements of 8.8m vehicles (where relevant) being fully within the kerbside lane of the road and the exit movements of 8.8m vehicles do not cross the centreline of the road.

Access - On-Site Queuing


PO 2.1

Sufficient accessible onsite queuing adjacent to access points is provided to meet the needs of development so that all vehicle queues can be contained fully within the boundaries of the development site, to minimise interruption of the functional performance of the road and maintain safe vehicle movements.

DTS/DPF 2.1

An access point in accordance with one of the following:

(a) will not service, or is not intended to service, more than 6 dwellings and there are no internal driveways, intersections, car parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site) as shown in the following diagram:



- (b) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length no greater than 6.4m
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site).
- (c) will service, or is intended to service, development that will generate less than 60 vehicle movements per day and:
 - (i) is expected to be serviced by vehicles with a length greater than a 6.4m small rigid vehicle
 - (ii) there are no internal driveways, intersections, parking spaces or gates within 6.0m of the access point (measured from the site boundary into the site)
 - (iii) any termination of, or change in priority of movement within the main car park aisle is located far enough into the site so that the largest vehicle expected on-site can store fully within the site before being required to stop
 - (iv) all parking or manoeuvring areas for commercial vehicles are located a minimum of 12m or the length of the largest vehicle expected on site from the access (measured from the site boundary into the site) as shown in the following diagram:



Access - Location (Spacing) - Existing Access Points

Page 8 of 37 Printed on 11/08/2022

PO 3.1

Existing access points designed to accommodate the type and volume of traffic likely to be generated by the development.

DTS/DPF 3.1

An existing access point satisfies (a), (b) or (c):

- (a) it will not service, or is not intended to service, more than 6 dwellings
- (b) it is not located on a Controlled Access Road and will not service development that will result in a larger class of vehicle expected to access the site using the existing access
- (c) it is not located on a Controlled Access Road and development constitutes:
 - (i) change of use between an office less than 500m² gross leasable floor area and a consulting room less than 500m² gross leasable floor area or vice versa
 - (ii) change in use from a shop to an office, consulting room or personal or domestic services establishment
 - (iii) change of use from a consulting room or office less than 250m² gross leasable floor area to shop less than 250m² gross leasable floor area
 - (iv) change of use from a shop less than 500m² gross leasable floor area to a warehouse less than 500m² gross leasable floor area
 - (v) an office or consulting room with a gross leasable floor area less than 500m².

Access - Location (Spacing) - New Access Points


PO 4.1

New access points are spaced apart from any existing access point or public road junction to manage impediments to traffic flow and maintain safe and efficient operating conditions on the road.

DTS/DPF 4.1

A new access point satisfies (a), (b) or (c):

(a) where a development site is intended to serve between 1 and 6 dwellings and has frontage to a local road (not being a Controlled Access Road) with a speed environment of 60km/h or less, the new access point is provided on the local road and located a minimum of 6.0m from the tangent point as shown in the following diagram:

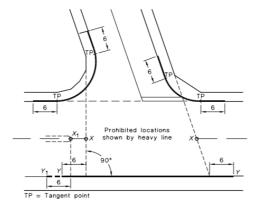

NOTE

The points marked X_1 and X are respectively at the median end on a divided road and at the intersection of the main road centre-line and the extensions of the side road property lines shown as dotted lines, on an undivided road. On a divided road, dimension Y_1 - Y_2 extends to Point Y_1 .

- (b) where the development site is intended to serve between 1 and 6 dwellings and access from a local road (being a road that is not a State Maintained Road) is not available, the new access:
 - (i) is not located on a Controlled Access Road
 - (ii) is not located on a section of road affected by double barrier lines
 - (iii) will be on a road with a speed environment of 70km/h or less
 - (iv) is located outside of the bold lines on the diagram shown in the diagram following part (a)
 - (v) located minimum of 6m from a median opening or pedestrian crossing.
- (c) where DTS/DPF 4.1 part (a) and (b) do not apply and access from an alternative local road at least 25m from the State Maintained Road is not available, and the access is not located on a Controlled Access Road, the new access is separated in accordance with the following:

Speed Limit	Separation between access points	Separation from public road junctions and merging/terminating lanes
50 km/h or	No spacing requirement	20m
less		
60 km/h	40m	123m
70 km/h	55m	151m
80 km/h	70m	181m
90 km/h	90m	214m
100 km/h	110m	248m
110 km/h	135m	285m

Page 9 of 37 Printed on 11/08/2022

Access - Location (Sight Lines)

PO 5.1


Access points are located An access point satisfies (a) or (b): and designed to accommodate sight lines that enable drivers and pedestrians to navigate potential conflict points with roads in a controlled

and safe manner.


DTS/DPF 5.1

drivers approaching or exiting an access point have an unobstructed line of sight in accordance with the following (measured at a height of 1.1m above the surface of the road):

Speed Limit	Access Point serving 1-6 dwellings	Access point serving all other development
40 km/h or less	40m	73m
50 km/h	55m	97m
60 km/h	73m	123m
70 km/h	92m	151m
80 km/h	114m	181m
90 km/h	139m	214m
100 km/h	165m	248m
110km/h	193m	285m

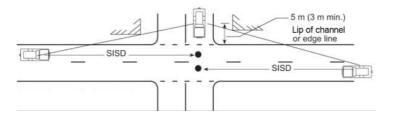

(b) pedestrian sightlines in accordance with the following diagram:

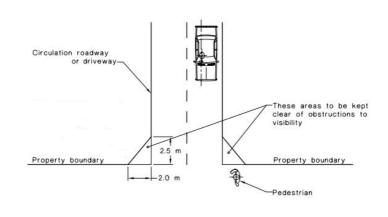

Access - Mud and Debris

PO 6.1

DTS/DPF 6.1

Access points constructed to minimise mud or other debris being carried or transferred

Where the road has an unsealed shoulder and the road is not kerbed the access way is sealed from the edge of seal on the road for a minimum of 10m or to the property boundary (whichever is closer)

onto the road to ensure safe road operating conditions.	
	Access - Stormwater
PO 7.1	DTS/DPF 7.1
Access points designed to minimise negative impact on roadside drainage of water.	Development does not: (a) decrease the capacity of an existing drainage point (b) restrict or prevent the flow of stormwater to an existing drainage point and system.
	Building on Road Reserve
PO 8.1	DTS/DPF 8.1
Buildings or structures	No encroachment of buildings or structures onto, above or below the road reserve.

Page 10 of 37 Printed on 11/08/2022

Policy24 - Enquiry

, , ,	
that encroach onto, above or below road reserves	
designed and sited to	
minimise impact on safe	
movements by all road	
users.	
	Public Road Junctions
PO 9.1	DTS/DPF 9.1
New junctions with public roads (including the	Development does not comprise any of the following:
opening of unmade public	(a) creating a new junction with a public road
road junctions) or	(b) opening an unmade public road junction
modifications to existing	(c) modifying an existing public road junction.
road junctions located	
and designed to ensure	
safe and efficient road	
operating conditions are maintained on the State	
Maintained on the State	
Maintainea Noda.	
	Corner Cut-Offs
PO 10.1	DTS/DPF 10.1
Development is located	Development does not involve building work, or building work is located wholly outside the land shown as 'Corner Cut-Off
1	

sightlines for drivers turning into and out of public road junctions to contribute to driver safety.

and designed to maintain Area' in the following diagram:



Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
Except where all of the relevant deemed-to-satisfy criteria are met, development (including the division of land) that involves any of the following to/on a State Maintained Road or within 25 metres of an intersection with any such road: (a) creation of a new access or junction (b) alterations to an existing access or public road junction (except where deemed to be minor in the opinion of the relevant authority) (c) development that changes the nature of vehicular movements or increase the number or frequency of movements through an existing access (except where deemed to be minor in the opinion of the relevant authority).	Commissioner of Highways.	To provide expert technical assessment and direction to the Relevant Authority on the safe and efficient operation and management of all roads relevant to the Commissioner of Highways as described in the Planning and Design Code.	Development of a class to which Schedule 9 clause 3 item 7 of the Planning, Development and Infrastructure (General) Regulations 2017 applies.

Traffic Generating Development Overlay

Assessment Provisions (AP)

Page 11 of 37 Printed on 11/08/2022

Desired Outcome		
DO 1	Safe and efficient operation of Urban Transport Routes and Major Urban Transport Routes for all road users.	
DO 2	Provision of safe and efficient access to and from urban transport routes and major urban transport routes.	

Performance Outcomes (PO) and Deemed to Satisfy (DTS) / Designated Performance Feature (DPF) Criteria

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Traffic Generating Development	
P0 1.1	DTS/DPF 1.1
Development designed to minimise its potential impact on the safety, efficiency and functional performance of the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.
P0 1.2	DTS/DPF 1.2
Access points sited and designed to accommodate the type and volume of traffic likely to be generated by development.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments (b) commercial development with a gross floor area of 10,000m2 or
	more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.
PO 1.3	DTS/DPF 1.3
Sufficient accessible on-site queuing provided to meet the needs of the development so that queues do not impact on the State Maintained Road network.	Access is obtained directly from a State Maintained Road where it involves any of the following types of development: (a) land division creating 50 or more additional allotments
	(b) commercial development with a gross floor area of 10,000m2 or more (c) retail development with a gross floor area of 2,000m2 or more (d) a warehouse or transport depot with a gross leasable floor area of 8,000m2 or more (e) industry with a gross floor area of 20,000m2 or more (f) educational facilities with a capacity of 250 students or more.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference

Page 12 of 37 Printed on 11/08/2022

Except	where all of the relevant deemed-to-satisfy criteria are	Commissioner of Highways.	To provide expert technical	Development
met, any of the following classes of development that are			assessment and direction to the	of a class to
propos	ed within 250m of a State Maintained Road:		Relevant Authority on the safe and	which
			efficient operation and	Schedule 9
(a)	land division creating 50 or more additional		management of all roads relevant	clause 3 item
	allotments		to the Commissioner of Highways	7 of the
(b)	commercial development with a gross floor area of		as described in the Planning and	Planning,
	10,000m ² or more		Design Code.	Development
(c)	retail development with a gross floor area of			and
	2,000m ² or more			Infrastructure
(d)	a warehouse or transport depot with a gross			(General)
	leasable floor area of 8,000m ² or more			Regulations
(e)	industry with a gross floor area of 20,000m ² or more			2017 applies.
(f)	educational facilities with a capacity of 250 students			
	or more.			

Water Resources Overlay

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Protection of the quality of surface waters considering adverse water quality impacts associated with projected reductions in rainfall and warmer air temperatures as a result of climate change.		
DO 2	Maintain the conveyance function and natural flow paths of watercourses to assist in the management of flood waters and stormwater runoff.		

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Water Co	atchment
PO 1.1	DTS/DPF 1.1
Watercourses and their beds, banks, wetlands and floodplains (1% AEP flood extent) are not damaged or modified and are retained in their natural state, except where modification is required for essential access or maintenance purposes.	None are applicable.
PO 1.2	DTS/DPF 1.2
Development avoids interfering with the existing hydrology or water regime of swamps and wetlands other than to improve the existing conditions to enhance environmental values.	None are applicable.
PO 1.5	DTS/DPF 1.5
Development that increases surface water run-off includes a suitably sized strip of vegetated land on each side of a watercourse to filter runoff to: (a) reduce the impacts on native aquatic ecosystems (b) minimise soil loss eroding into the watercourse.	A strip of land 20m or more wide measured from the top of existing banks on each side of the watercourse is free from development, livestock use and revegetated with locally indigenous vegetation.
PO 1.6	DTS/DPF 1.6
Development resulting in the depositing or placing of an object or solid material in a watercourse or lake occurs only where it involves any of the following:	None are applicable.
(a) the construction of an erosion control structure (b) devices or structures used to extract or regulate water flowing in a watercourse	
(c) devices used for scientific purposes (d) the rehabilitation of watercourses.	

Page 13 of 37 Printed on 11/08/2022

P0 1.7	DTS/DPF 1.7
Watercourses, floodplains (1% AEP flood extent) and wetlands protected and enhanced by retaining and protecting existing native vegetation.	None are applicable.
PO 1.8	DTS/DPF 1.8
Watercourses, floodplains (1% AEP flood extent) and wetlands are protected and enhanced by stabilising watercourse banks and reducing sediments and nutrients entering the watercourse.	None are applicable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	•	Statutory Reference
None	None	None	None

Part 4 - General Development Policies

Clearance from Overhead Powerlines

Assessment Provisions (AP)

	Desired Outcome
DO 1	Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
P0 1.1	DTS/DPF 1.1
Buildings are adequately separated from aboveground powerlines to minimise potential hazard to people and property.	One of the following is satisfied: (a) a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the regulations prescribed for the purposes of section 86 of the <i>Electricity Act</i> 1996 (b) there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Design in Urban Areas

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Develo	opment is:	
	(a)	contextual - by considering, recognising and carefully responding to its natural surroundings or built environment and positively contributing to the character of the locality	
	(b)	durable - fit for purpose, adaptable and long lasting	
	(c)	inclusive - by integrating landscape design to optimise pedestrian and cyclist usability, privacy and equitable access and promoting the provision of quality spaces integrated with the public realm that can be used for access and recreation and help optimise security and safety both internally and within the public realm, for occupants and visitors	
	(d)	sustainable - by integrating sustainable techniques into the design and siting of development and landscaping to improve	

Page 14 of 37 Printed on 11/08/2022

community health, urban heat, water management, environmental performance, biodiversity and local amenity and to minimise energy consumption.

Performance Outcome Deemed-to-Satisfy Criteria / Designated Performance Feature All Development External Appearance PO 1.1 DTS/DPF 1.1 Buildings reinforce corners through changes in setback, articulation, None are applicable. materials, colour and massing (including height, width, bulk, roof form and slope). PO 1.2 DTS/DPF 1.2 Where zero or minor setbacks are desirable, development provides shelter None are applicable. over footpaths (in the form of verandahs, awnings, canopies and the like, with adequate lighting) to positively contribute to the walkability, comfort and safety of the public realm. PO 1.3 DTS/DPF 1.3 Building elevations facing the primary street (other than ancillary None are applicable. buildings) are designed and detailed to convey purpose, identify main access points and complement the streetscape. PO 1.4 DTS/DPF 1.4 Plant, exhaust and intake vents and other technical equipment are Development does not incorporate any structures that protrude beyond integrated into the building design to minimise visibility from the public the roofline. realm and negative impacts on residential amenity by: (a) positioning plant and equipment discretely, in unobtrusive locations as viewed from public roads and spaces (b) screening rooftop plant and equipment from view (c) when located on the roof of non-residential development, locating the plant and equipment as far as practicable from adjacent sensitive land uses. PO 1.5 DTS/DPF 1.5 The negative visual impact of outdoor storage, waste management, None are applicable. loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone. Safety PO 2.1 DTS/DPF 2.1 Development maximises opportunities for passive surveillance of the None are applicable. public realm by providing clear lines of sight, appropriate lighting and the use of visually permeable screening wherever practicable. PO 2.2 DTS/DPF 2.2 Development is designed to differentiate public, communal and private None are applicable. areas. PO 2.3 DTS/DPF 2.3 Buildings are designed with safe, perceptible and direct access from None are applicable. public street frontages and vehicle parking areas. DTS/DPF 2.4 Development at street level is designed to maximise opportunities for None are applicable.

Page 15 of 37 Printed on 11/08/2022

Policy24 - Enquiry	
passive surveillance of the adjacent public realm.	
PO 2.5	DTS/DPF 2.5
Common areas and entry points of buildings (such as the foyer areas of residential buildings) and non-residential land uses at street level, maximise passive surveillance from the public realm to the inside of the building at night.	None are applicable.
Lands	scaping
PO 3.1	DTS/DPF 3.1
Soft landscaping and tree planting are incorporated to:	None are applicable.
minimise heat absorption and reflection maximise shade and shelter maximise stormwater infiltration enhance the appearance of land and streetscapes.	
Environmenta	al Performance
PO 4.1	DTS/DPF 4.1
Buildings are sited, oriented and designed to maximise natural sunlight access and ventilation to main activity areas, habitable rooms, common areas and open spaces.	None are applicable.
PO 4.2	DTS/DPF 4.2
Buildings are sited and designed to maximise passive environmental performance and minimise energy consumption and reliance on mechanical systems, such as heating and cooling.	None are applicable.
PO 4.3	DTS/DPF 4.3
Buildings incorporate climate responsive techniques and features such as building and window orientation, use of eaves, verandahs and shading structures, water harvesting, at ground landscaping, green walls, green roofs and photovoltaic cells.	None are applicable.
On-site Waste Tr	reatment Systems
PO 6.1	DTS/DPF 6.1
Dedicated on-site effluent disposal areas do not include any areas to be used for, or could be reasonably foreseen to be used for, private open space, driveways or car parking.	(a) encroach within an area used as private open space or result in less private open space than that specified in Design in Urban Areas Table 1 - Private Open Space (b) use an area also used as a driveway (c) encroach within an area used for on-site car parking or result in less on-site car parking than that specified in Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements or Table 2 - Off-Street Car Parking Requirements in Designated Areas.
Car parking	gappearance
P0 7.1	DTS/DPF 7.1
Development facing the street is designed to minimise the negative impacts of any semi-basement and undercroft car parking on streetscapes through techniques such as: (a) limiting protrusion above finished ground level (b) screening through appropriate planting, fencing and mounding (c) limiting the width of openings and integrating them into the building structure.	None are applicable.
P0 7.2	DTS/DPF 7.2
Vehicle parking areas appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such	None are applicable.

Page 16 of 37 Printed on 11/08/2022

1 Olloy 24 Enquiry			
as ensuring they are attractively developed and landscaped, screen fenced and the like.			
P0 7.3	DTS/DPF 7.3		
Safe, legible, direct and accessible pedestrian connections are provided between parking areas and the development.	None are applicable.		
PO 7.4	DTS/DPF 7.4		
Street-level vehicle parking areas incorporate tree planting to provide shade, reduce solar heat absorption and reflection.	Vehicle parking areas that are open to the sky and comprise 10 or more car parking spaces include a shade tree with a mature canopy of 4m diameter spaced for each 10 car parking spaces provided and a landscaped strip on any road frontage of a minimum dimension of 1m.		
PO 7.5	DTS/DPF 7.5		
Street level parking areas incorporate soft landscaping to improve visual appearance when viewed from within the site and from public places.	Vehicle parking areas comprising 10 or more car parking spaces include soft landscaping with a minimum dimension of:		
	(a) 1m along all public road frontages and allotment boundaries(b) 1m between double rows of car parking spaces.		
PO 7.6	DTS/DPF 7.6		
Vehicle parking areas and associated driveways are landscaped to provide shade and positively contribute to amenity.	None are applicable.		
P0 7.7	DTS/DPF 7.7		
Vehicle parking areas and access ways incorporate integrated stormwater management techniques such as permeable or porous surfaces, infiltration systems, drainage swales or rain gardens that integrate with soft landscaping.	None are applicable.		
Earthworks ar	d cloping land		
Editiworks di	id sloping land		
PO 8.1	DTS/DPF 8.1		
PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or		
PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography.	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more.		
PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1		
PO 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. PO 8.2 Driveways and access tracks designed and constructed to allow safe and	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land.	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. Po 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. Po 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface.		
Po 8.1 Development, including any associated driveways and access tracks, minimises the need for earthworks to limit disturbance to natural topography. Po 8.2 Driveways and access tracks designed and constructed to allow safe and convenient access on sloping land. Po 8.3 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8): (a) do not contribute to the instability of embankments and cuttings (b) provide level transition areas for the safe movement of people and goods to and from the development (c) are designed to integrate with the natural topography of the land.	DTS/DPF 8.1 Development does not involve any of the following: (a) excavation exceeding a vertical height of 1m (b) filling exceeding a vertical height of 1m (c) a total combined excavation and filling vertical height of 2m or more. DTS/DPF 8.2 Driveways and access tracks on sloping land (with a gradient exceeding 1 in 8) satisfy (a) and (b): (a) do not have a gradient exceeding 25% (1-in-4) at any point along the driveway (b) are constructed with an all-weather trafficable surface. DTS/DPF 8.3 None are applicable.		

Page 17 of 37 Printed on 11/08/2022

PO 8.5 DTS/DPF 8.5 Development does not occur on land at risk of landslip or increase the None are applicable. potential for landslip or land surface instability. Overlooking / Visual Privacy (low rise buildings) PO 10.1 DTS/DPF 10.1 Development mitigates direct overlooking from upper level windows to Upper level windows facing side or rear boundaries shared with a habitable rooms and private open spaces of adjoining residential uses in residential use in a neighbourhood-type zone: neighbourhood-type zones. are permanently obscured to a height of 1.5m above finished floor level and are fixed or not capable of being opened more than (b) have sill heights greater than or equal to 1.5m above finished floor level (c) incorporate screening with a maximum of 25% openings, permanently fixed no more than 500mm from the window surface and sited adjacent to any part of the window less than 1.5 m above the finished floor level. PO 10.2 DTS/DPF 10.2 Development mitigates direct overlooking from balconies to habitable One of the following is satisfied: rooms and private open space of adjoining residential uses in neighbourhood type zones. the longest side of the balcony or terrace will face a public road, public road reserve or public reserve that is at least 15m wide in all places faced by the balcony or terrace (b) all sides of balconies or terraces on upper building levels are permanently obscured by screening with a maximum 25% transparency/openings fixed to a minimum height of: 1.5m above finished floor level where the balcony is located at least 15 metres from the nearest habitable window of a dwelling on adjacent land 1.7m above finished floor level in all other cases Site Facilities / Waste Storage (excluding low rise residential development) PO 11.1 DTS/DPF 11.1 Development provides a dedicated area for on-site collection and sorting None are applicable. of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection. PO 11.2 DTS/DPF 11.2 Communal waste storage and collection areas are located, enclosed and None are applicable. designed to be screened from view from the public domain, open space and dwellings. DTS/DPF 11.3 Communal waste storage and collection areas are designed to be well None are applicable. ventilated and located away from habitable rooms. PO 11.4 **DTS/DPF 11.4** Communal waste storage and collection areas are designed to allow None are applicable. waste and recycling collection vehicles to enter and leave the site without reversing. PO 11.5 DTS/DPF 11.5 For mixed use developments, non-residential waste and recycling storage None are applicable. areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate. All Development - Medium and High Rise External Appearance DTS/DPF 12.1 Buildings positively contribute to the character of the local area by None are applicable. responding to local context. DTS/DPF 12.2 PO 12.2

Page 18 of 37 Printed on 11/08/2022

Policy24 - Enquiry			
Architectural detail at street level and a mixture of materials at lower building levels near the public interface are provided to reinforce a human scale.	None are applicable.		
PO 12.3	DTS/DPF 12.3		
Buildings are designed to reduce visual mass by breaking up building elevations into distinct elements.	None are applicable.		
P0 12.4	DTS/DPF 12.4		
Boundary walls visible from public land include visually interesting treatments to break up large blank elevations.	None are applicable.		
PO 12.5	DTS/DPF 12.5		
External materials and finishes are durable and age well to minimise ongoing maintenance requirements.	Buildings utilise a combination of the following external materials and finishes:		
	(a) masonry (b) natural stone (c) pre-finished materials that minimise staining, discolouring or deterioration.		
PO 12.6	DTS/DPF 12.6		
Street-facing building elevations are designed to provide attractive, high quality and pedestrian-friendly street frontages.	Building street frontages incorporate:		
	 (a) active uses such as shops or offices (b) prominent entry areas for multi-storey buildings (where it is a common entry) (c) habitable rooms of dwellings (d) areas of communal public realm with public art or the like, where consistent with the zone and/or subzone provisions. 		
PO 12.7	DTS/DPF 12.7		
Entrances to multi-storey buildings are safe, attractive, welcoming, functional and contribute to streetscape character.	Entrances to multi-storey buildings are: (a) oriented towards the street (b) clearly visible and easily identifiable from the street and vehicle parking areas (c) designed to be prominent, accentuated and a welcoming feature if there are no active or occupied ground floor uses (d) designed to provide shelter, a sense of personal address and transitional space around the entry (e) located as close as practicable to the lift and / or lobby access to minimise the need for long access corridors (f) designed to avoid the creation of potential areas of entrapment.		
PO 12.8	DTS/DPF 12.8		
Building services, plant and mechanical equipment are screened from the public realm.	None are applicable.		
Land	scaping		
P0 13.1	DTS/DPF 13.1		
Development facing a street provides a well landscaped area that contains a deep soil space to accommodate a tree of a species and size adequate to provide shade, contribute to tree canopy targets and soften the appearance of buildings.	Buildings provide a 4m by 4m deep soil space in front of the building that accommodates a medium to large tree, except where no building setback from front property boundaries is desired.		
PO 13.2	DTS/DPF 13.2		
Deep soil zones are provided to retain existing vegetation or provide areas that can accommodate new deep root vegetation, including tall trees with large canopies to provide shade and soften the appearance of multi-storey	at not less than the following rates, except in a location or zone where full		
buildings.			

Page 19 of 37 Printed on 11/08/2022

Folicy24 - Enquiry	Site area	Minimum deep	Minimum dimension	Tree / deep soil zones
		son area	aimension	zones
	<300 m ²	10 m ²	1.5m	1 small tree / 10 m ²
	300-1500 m ²	7% site area	3m	1 medium tree / 30 m ²
	>1500 m ²	7% site area	6m	1 large or medium tree / 60 m ²
	Tree size and sit	e area definitions		-
	Small tree	4-6m mature heig	ht and 2-4m canop	y spread
	Medium tree	6-12m mature he	ight and 4-8m cand	ppy spread
	Large tree	12m mature heigl	ht and >8m canopy	spread
	Site area	The total area for per dwelling	development site,	not average area
PO 13.3	DTS/DPF 13.3			
Deep soil zones with access to natural light are provided to assist in maintaining vegetation health.	None are applicable.			
PO 13.4	DTS/DPF 13.4			
Unless separated by a public road or reserve, development sites adjacent to any zone that has a primary purpose of accommodating low-rise residential development incorporate a deep soil zone along the common boundary to enable medium to large trees to be retained or established to assist in screening new buildings of 3 or more building levels in height.	Building elements of 3 or more building levels in height are set back at least 6m from a zone boundary in which a deep soil zone area is incorporated.			
Enviror	nmental			
PO 14.1	DTS/DPF 14.1			
Development minimises detrimental micro-climatic impacts on adjacent land and buildings.	None are applicab	ble.		
P0 14.2	DTS/DPF 14.2			
Development incorporates sustainable design techniques and features such as window orientation, eaves and shading structures, water harvesting and use, green walls and roof designs that enable the provision of rain water tanks (where they are not provided elsewhere on site), green roofs and photovoltaic cells.	None are applicat	ole.		
PO 14.3	DTS/DPF 14.3			
Development of 5 or more building levels, or 21m or more in height (as measured from natural ground level and excluding roof-mounted mechanical plant and equipment) is designed to minimise the impacts of wind through measures such as:	None are applicat	ole.		
a podium at the base of a tall tower and aligned with the street to deflect wind away from the street substantial verandahs around a building to deflect downward				
travelling wind flows over pedestrian areas (c) the placement of buildings and use of setbacks to deflect the wind at ground level				

Page 20 of 37 Printed on 11/08/2022

avoiding tall shear elevations that create windy conditions at street level. Car Parking PO 15.1 DTS/DPF 15.1 Multi-level vehicle parking structures are designed to contribute to active Multi-level vehicle parking structures within buildings: street frontages and complement neighbouring buildings. provide land uses such as commercial, retail or other non-car parking uses along ground floor street frontages (b) incorporate facade treatments in building elevations facing along major street frontages that are sufficiently enclosed and detailed to complement adjacent buildings. PO 15.2 DTS/DPF 15.2 Multi-level vehicle parking structures within buildings complement the None are applicable. surrounding built form in terms of height, massing and scale. Overlooking/Visual Privacy PO 16.1 DTS/DPF 16.1 None are applicable. Development mitigates direct overlooking of habitable rooms and private open spaces of adjacent residential uses in neighbourhood-type zones through measures such as: appropriate site layout and building orientation off-setting the location of balconies and windows of habitable rooms or areas with those of other buildings so that views are oblique rather than direct to avoid direct line of sight (c) building setbacks from boundaries (including building boundary to boundary where appropriate) that interrupt views or that provide a spatial separation between balconies or windows of habitable rooms screening devices that are integrated into the building design and have minimal negative effect on residents' or neighbours' amenity. All non-residential development Water Sensitive Design PO 42.1 DTS/DPF 42.1 Development likely to result in risk of export of sediment, suspended None are applicable. solids, organic matter, nutrients, oil and grease include stormwater management systems designed to minimise pollutants entering stormwater. PO 42.2 DTS/DPF 42.2 Water discharged from a development site is of a physical, chemical and None are applicable. biological condition equivalent to or better than its pre-developed state. PO 42.3 DTS/DPF 42.3 Development includes stormwater management systems to mitigate peak None are applicable. flows and manage the rate and duration of stormwater discharges from the site to ensure that development does not increase peak flows in downstream systems. Wash-down and Waste Loading and Unloading PO 43.1 DTS/DPF 43.1 Areas for activities including loading and unloading, storage of waste None are applicable. refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are: (a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off

Page 21 of 37 Printed on 11/08/2022

- (b) paved with an impervious material to facilitate wastewater
- of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area
- (d) are designed to drain wastewater to either:
 - a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or Community Wastewater Management Scheme or
 - a holding tank and its subsequent removal off-site on a regular basis.

Laneway Development

Infrastructure and Access

PO 44.1

Development with a primary street comprising a laneway, alley, lane, right of way or similar minor thoroughfare only occurs where:

- (a) existing utility infrastructure and services are capable of accommodating the development
- the primary street can support access by emergency and regular service vehicles (such as waste collection)
- it does not require the provision or upgrading of infrastructure on public land (such as footpaths and stormwater management systems)
- (d) safety of pedestrians or vehicle movement is maintained
- (e) any necessary grade transition is accommodated within the site of the development to support an appropriate development intensity and orderly development of land fronting minor thoroughfares.

DTS/DPF 44.1

Development with a primary street frontage that is not an alley, lane, right of way or similar public thoroughfare.

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

	Desired Outcome		
DO 1	Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.		

 $Performance\ Outcomes\ (PO)\ and\ Deemed-to-Satisfy\ (DTS)\ Criteria\ /\ Designated\ Performance\ Feature\ (DPF)$

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Water	Supply
P0 11.1 Development is connected to an appropriate water supply to meet the ongoing requirements of the intended use.	DTS/DPF 11.1 Development is connected, or will be connected, to a reticulated water scheme or mains water supply with the capacity to meet the on-going requirements of the development.
Wastewat	er Services
P0 12.1	DTS/DPF 12.1
Development is connected to an approved common wastewater disposal service with the capacity to meet the requirements of the intended use. Where this is not available an appropriate on-site service is provided to meet the ongoing requirements of the intended use in accordance with the following:	Development is connected, or will be connected, to an approved common wastewater disposal service with the capacity to meet the requirements of the development. Where this is not available it is instead capable of being serviced by an on-site waste water treatment system in accordance with the following:

Page 22 of 37 Printed on 11/08/2022

- it is wholly located and contained within the allotment of the development it will service
- (b) in areas where there is a high risk of contamination of surface, ground, or marine water resources from on-site disposal of liquid wastes, disposal systems are included to minimise the risk of pollution to those water resources
- (c) septic tank effluent drainage fields and other wastewater disposal areas are located away from watercourses and flood prone, sloping, saline or poorly drained land to minimise environmental harm
- (a) the system is wholly located and contained within the allotment of development it will service; and
- (b) the system will comply with the requirements of the South Australian Public Health Act 2011.

PO 12.2 DTS/DPF 12.2

Effluent drainage fields and other wastewater disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.

Development is not built on, or encroaches within, an area that is, or will be, required for a sewerage system or waste control system.

Interface between Land Uses

Assessment Provisions (AP)

	Desired Outcome
DO 1	Development is located and designed to mitigate adverse effects on or from neighbouring and proximate land uses.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome Deemed-to-Satisfy Criteria / Designated Performance Feature

Hours of Operation

PO 2.1

Non-residential development does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers) or an adjacent zone primarily for sensitive receivers through its hours of operation having regard to:

- (a) the nature of the development
- (b) measures to mitigate off-site impacts
- (c) the extent to which the development is desired in the zone
- (d) measures that might be taken in an adjacent zone primarily for sensitive receivers that mitigate adverse impacts without unreasonably compromising the intended use of that land.

DTS/DPF 2.1

Development operating within the following hours:

Class of Development		Hours of operation
Consulting room		7am to 9pm, Monday to Friday 8am to 5pm, Saturday
Office		7am to 9pm, Monday to Friday 8am to 5pm, Saturday
Shop, other than any one or combination of the following:		7am to 9pm, Monday to Friday 8am to 5pm, Saturday and Sunday
(b) cella Prod Land Rural	urant r door in the uctive Rural scape Zone, I Zone or Rural culture Zone	

Overshadowing

PO 3.1

Overshadowing of habitable room windows of adjacent residential land uses in:

a. a neighbourhood-type zone is minimised to maintain access to direct

DTS/DPF 3.1

North-facing windows of habitable rooms of adjacent residential land uses in a neighbourhood-type zone receive at least 3 hours of direct sunlight between 9.00am and 3.00pm on 21 June.

Page 23 of 37 Printed on 11/08/2022

Policy24 - Enquiry		
winter sunlight b. other zones is managed to enable access to direct winter sunlight.		
Po 3.2 Overshadowing of the primary area of private open space or communal open space of adjacent residential land uses in: a. a neighbourhood type zone is minimised to maintain access to direct winter sunlight b. other zones is managed to enable access to direct winter sunlight.	3.00 pm on 21 June to adjactype zone in accordance with a. for ground level private oi. half the existing ground le or ii. 35m2 of the existing grouarea's dimensions measuring	pen space, the smaller of the following: evel open space und level open space (with at least one of the
PO 3.3 Development does not unduly reduce the generating capacity of adjacent rooftop solar energy facilities taking into account: (a) the form of development contemplated in the zone (b) the orientation of the solar energy facilities (c) the extent to which the solar energy facilities are already overshadowed.	DTS/DPF 3.3 None are applicable.	
Activities Generatir	ng Noise or Vibration	
P0 4.1	DTS/DPF 4.1	
Development that emits noise (other than music) does not unreasonably impact the amenity of sensitive receivers (or lawfully approved sensitive receivers).	Noise that affects sensitive r Protection (Noise) Policy crit	eceivers achieves the relevant Environment teria.
P0 4.2	DTS/DPF 4.2	
Areas for the on-site manoeuvring of service and delivery vehicles, plant and equipment, outdoor work spaces (and the like) are designed and sited to not unreasonably impact the amenity of adjacent sensitive receivers (or lawfully approved sensitive receivers) and zones primarily intended to accommodate sensitive receivers due to noise and vibration by adopting techniques including: (a) locating openings of buildings and associated services away from the interface with the adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (b) when sited outdoors, locating such areas as far as practicable from adjacent sensitive receivers and zones primarily intended to accommodate sensitive receivers (c) housing plant and equipment within an enclosed structure or acoustic enclosure (d) providing a suitable acoustic barrier between the plant and / or	None are applicable.	
equipment and the adjacent sensitive receiver boundary or zone.		
Outdoor areas associated with licensed premises (such as beer gardens or dining areas) are designed and/or sited to not cause unreasonable noise impact on existing adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.	
PO 4.6 Development incorporating music achieves suitable acoustic amenity when measured at the boundary of an adjacent sensitive receiver (or	DTS/DPF 4.6 Development incorporating n that will achieve the following	nusic includes noise attenuation measures g noise levels:
lawfully approved sensitive receiver) or zone primarily intended to accommodate sensitive receivers.	Assessment location	Music noise level

Page 24 of 37 Printed on 11/08/2022

Policy24 - Enquiry		
	Externally at the nearest existing or envisaged noise sensitive location	Less than 8dB above the level of background noise (L _{90,15min}) in any octave band of the sound spectrum (LOCT10,15 < LOCT90,15 + 8dB)
Air Q	uality	
PO 5.2	DTS/DPF 5.2	
Development that includes chimneys or exhaust flues (including cafes, restaurants and fast food outlets) is designed to minimise nuisance or adverse health impacts to sensitive receivers (or lawfully approved sensitive receivers) by:	None are applicable.	
(a) incorporating appropriate treatment technology before exhaust emissions are released		
(b) locating and designing chimneys or exhaust flues to maximise the dispersion of exhaust emissions, taking into account the location of sensitive receivers.		
Ligh	: Spill	
PO 6.1	DTS/DPF 6.1	
External lighting is positioned and designed to not cause unreasonable light spill impact on adjacent sensitive receivers (or lawfully approved sensitive receivers).	None are applicable.	
Solar Reflec	tivity / Glare	
P0 7.1	DTS/DPF 7.1	
Development is designed and comprised of materials and finishes that do not unreasonably cause a distraction to adjacent road users and pedestrian areas or unreasonably cause heat loading and micro-climatic impacts on adjacent buildings and land uses as a result of reflective solar glare.	None are applicable.	

Site Contamination

Assessment Provisions (AP)

Desired Outcome Ensure land is suitable for the proposed use in circumstances where it is, or may have been, subject to site contamination.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Ensure land is suitable for use when land use changes to a more sensitive use.	Development satisfies (a), (b), (c) or (d): (a) does not involve a change in the use of land (b) involves a change in the use of land that does not constitute a change to a more sensitive use (c) involves a change in the use of land to a more sensitive use on land at which site contamination is unlikely to exist (as demonstrated in a site contamination declaration form) (d) involves a change in the use of land to a more sensitive use on land at which site contamination exists, or may exist (as demonstrated in a site contamination declaration form), and satisfies both of the following: (i) a site contamination audit report has been prepared under Part 10A of the Environment Protection Act 1993 in relation to the land within the previous 5 years which states that-
	A. site contamination does not exist (or no longer

Page 25 of 37 Printed on 11/08/2022

exists) at the land
or
 B. the land is suitable for the proposed use or range of uses (without the need for any further remediation)
or
C. where remediation is, or remains, necessary for the proposed use (or range of uses), remediation work has been carried out or will be carried out (and the applicant has provided a written undertaking that the remediation works will be implemented in association with the development)
and
 (ii) no other class 1 activity or class 2 activity has taken place at the land since the preparation of the site contamination audit report (as demonstrated in a site contamination declaration form).

Transport, Access and Parking

Assessment Provisions (AP)

	Desired Outcome
DO 1	A comprehensive, integrated and connected transport system that is safe, sustainable, efficient, convenient and accessible to all users.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Movemen	nt Systems
P0 1.2	DTS/DPF 1.2
Development is designed to discourage commercial and industrial vehicle movements through residential streets and adjacent other sensitive receivers.	None are applicable.
P0 1.4	DTS/DPF 1.4
Development is sited and designed so that loading, unloading and turning of all traffic avoids interrupting the operation of and queuing on public roads and pedestrian paths.	All vehicle manoeuvring occurs onsite.
Sigh	tlines
P0 2.1	DTS/DPF 2.1
Sightlines at intersections, pedestrian and cycle crossings, and crossovers to allotments for motorists, cyclists and pedestrians are maintained or enhanced to ensure safety for all road users and pedestrians.	None are applicable.
PO 2.2	DTS/DPF 2.2
Walls, fencing and landscaping adjacent to driveways and corner sites are designed to provide adequate sightlines between vehicles and pedestrians.	None are applicable.
Vehicle Access	
PO 3.1	DTS/DPF 3.1
Safe and convenient access minimises impact or interruption on the operation of public roads.	The access is: (a) provided via a lawfully existing or authorised driveway or access point or an access point for which consent has been granted as

Page 26 of 37 Printed on 11/08/2022

	part of an application for the division of land or (b) not located within 6m of an intersection of 2 or more roads or a pedestrian activated crossing.
P0 3.2	DTS/DPF 3.2
Development incorporating vehicular access ramps ensures vehicles can enter and exit a site safely and without creating a hazard to pedestrians and other vehicular traffic.	None are applicable.
PO 3.3	DTS/DPF 3.3
Access points are sited and designed to accommodate the type and volume of traffic likely to be generated by the development or land use.	None are applicable.
PO 3.4	DTS/DPF 3.4
Access points are sited and designed to minimise any adverse impacts on neighbouring properties.	None are applicable.
PO 3.5 Access points are located so as not to interfere with street trees, existing street furniture (including directional signs, lighting, seating and weather shelters) or infrastructure services to maintain the appearance of the streetscape, preserve local amenity and minimise disruption to utility infrastructure assets.	DTS/DPF 3.5 Vehicle access to designated car parking spaces satisfy (a) or (b): (a) is provided via a lawfully existing or authorised access point or an access point for which consent has been granted as part of an application for the division of land (b) where newly proposed, is set back: (i) 0.5m or more from any street furniture, street pole, infrastructure services pit, or other stormwater or utility infrastructure unless consent is provided from the asset owner (ii) 2m or more from the base of the trunk of a street tree unless consent is provided from the tree owner for a lesser distance (iii) 6m or more from the tangent point of an intersection of or more roads (iv) outside of the marked lines or infrastructure dedicating a pedestrian crossing.
PO 3.6	DTS/DPF 3.6
Driveways and access points are separated and minimised in number to optimise the provision of on-street visitor parking (where on-street parking is appropriate).	Driveways and access points: (a) for sites with a frontage to a public road of 20m or less, one access point no greater than 3.5m in width is provided (b) for sites with a frontage to a public road greater than 20m: (i) a single access point no greater than 6m in width is provided or (ii) not more than two access points with a width of 3.5m each are provided.
PO 3.7	DTS/DPF 3.7
Access points are appropriately separated from level crossings to avoid interference and ensure their safe ongoing operation.	Development does not involve a new or modified access or cause an increase in traffic through an existing access that is located within the following distance from a railway crossing: (a) 80 km/h road - 110m (b) 70 km/h road - 90m (c) 60 km/h road - 70m (d) 50km/h or less road - 50m.
PO 3.8	DTS/DPF 3.8
Driveways, access points, access tracks and parking areas are designed and constructed to allow adequate movement and manoeuvrability having regard to the types of vehicles that are reasonably anticipated.	None are applicable.

Page 27 of 37 Printed on 11/08/2022

Policy24 - Eriquily	
PO 3.9	DTS/DPF 3.9
Development is designed to ensure vehicle circulation between activity areas occurs within the site without the need to use public roads.	None are applicable.
Access for Peop	I le with Disabilities
P0 4.1	DTS/DPF 4.1
Development is sited and designed to provide safe, dignified and convenient access for people with a disability.	None are applicable.
Vehicle Pa	rking Rates
P0 5.1	DTS/DPF 5.1
Sufficient on-site vehicle parking and specifically marked accessible car parking places are provided to meet the needs of the development or land use having regard to factors that may support a reduced on-site rate such as:	Development provides a number of car parking spaces on-site at a rate no less than the amount calculated using one of the following, whichever is relevant:
 (a) availability of on-street car parking (b) shared use of other parking areas (c) in relation to a mixed-use development, where the hours of operation of commercial activities complement the residential use of the site, the provision of vehicle parking may be shared (d) the adaptive reuse of a State or Local Heritage Place. 	 (a) Transport, Access and Parking Table 1 - General Off-Street Car Parking Requirements (b) Transport, Access and Parking Table 2 - Off-Street Vehicle Parking Requirements in Designated Areas (c) if located in an area where a lawfully established carparking fund operates, the number of spaces calculated under (a) or (b) less the number of spaces offset by contribution to the fund.
Vehicle Pa	rking Areas
PO 6.1 Vehicle parking areas are sited and designed to minimise impact on the operation of public roads by avoiding the use of public roads when moving from one part of a parking area to another.	DTS/DPF 6.1 Movement between vehicle parking areas within the site can occur without the need to use a public road.
PO 6.2 Vehicle parking areas are appropriately located, designed and constructed to minimise impacts on adjacent sensitive receivers through measures such as ensuring they are attractively developed and landscaped, screen fenced, and the like.	DTS/DPF 6.2 None are applicable.
PO 6.3 Vehicle parking areas are designed to provide opportunity for integration and shared-use of adjacent car parking areas to reduce the total extent of vehicle parking areas and access points.	DTS/DPF 6.3 None are applicable.
P0 6.4 Pedestrian linkages between parking areas and the development are provided and are safe and convenient.	DTS/DPF 6.4 None are applicable.
PO 6.5	DTS/DPF 6.5
Vehicle parking areas that are likely to be used during non-daylight hours are provided with sufficient lighting to entry and exit points to ensure clear visibility to users.	None are applicable.
PO 6.6	DTS/DPF 6.6
Loading areas and designated parking spaces for service vehicles are provided within the boundary of the site.	Loading areas and designated parking spaces are wholly located within the site.
Undercroft and Below Ground G	I Baraging and Parking of Vehicles
P0 7.1	DTS/DPF 7.1
Undercroft and below ground garaging of vehicles is designed to enable safe entry and exit from the site without compromising pedestrian or cyclist safety or causing conflict with other vehicles.	None are applicable.

Page 28 of 37 Printed on 11/08/2022

Bicycle Parking in	Designated Areas	
· · · · ·		
P0 9.1 The provision of adequately sized on-site bicycle parking facilities encourages cycling as an active transport mode.	DTS/DPF 9.1 Areas and / or fixtures are provided for the parking and storage of bicycles at a rate not less than the amount calculated using Transport, Access and Parking Table 3 - Off Street Bicycle Parking Requirements.	
PO 9.2	DTS/DPF 9.2	
Bicycle parking facilities provide for the secure storage and tethering of bicycles in a place where casual surveillance is possible, is well lit and signed for the safety and convenience of cyclists and deters property theft.	None are applicable.	
PO 9.3	DTS/DPF 9.3	
Non-residential development incorporates end-of-journey facilities for employees such as showers, changing facilities and secure lockers, and signage indicating the location of the facilities to encourage cycling as a mode of journey-to-work transport.	None are applicable.	
Corner Cut-Offs		
PO 10.1	DTS/DPF 10.1	
Development is located and designed to ensure drivers can safely turn into and out of public road junctions.	Development does not involve building work, or building work is located wholly outside the land shown as Corner Cut-Off Area in the following diagram:	
	Corner Cut- Off Area Allotment Boundary Allotment Boundary Road Reserve	

Table 1 - General Off-Street Car Parking Requirements

The following parking rates apply and if located in an area where a lawfully established carparking fund operates, the number of spaces is reduced by an amount equal to the number of spaces offset by contribution to the fund.

Class of Development	Car Parking Rate (unless varied by Table 2 onwards) Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.
Residential Development	
Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
Group Dwelling	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.
Residential Flat Building	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.

Page 29 of 37 Printed on 11/08/2022

	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	
	0.33 spaces per dwelling for visitor parking where development involves 3 or more dwellings.	
Row Dwelling where vehicle access is from the primary street	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
primary succes	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	
Row Dwelling where vehicle access is not from the primary street (i.e. rear-loaded)	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	
Semi-Detached Dwelling	Dwelling with 1 bedroom (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 2 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling, 1 of which is to be covered.	
Aged / Supported Accommodation		
Retirement village	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.	
	0.2 spaces per dwelling for visitor parking.	
Supported accommodation	0.3 spaces per bed.	
Residential Development (Other)		
Ancillary accommodation	No additional requirements beyond those associated with the main dwelling.	
Residential park	Dwelling with 1 or 2 bedrooms (including rooms capable of being used as a bedroom) - 1 space per dwelling.	
	Dwelling with 3 or more bedrooms (including rooms capable of being used as a bedroom) - 2 spaces per dwelling.	
	0.2 spaces per dwelling for visitor parking.	
Student accommodation	0.3 spaces per bed.	
Workers' accommodation	0.5 spaces per bed plus 0.2 spaces per bed for visitor parking.	
Tourist		
Caravan park / tourist park	Parks with 100 sites or less - a minimum of 1 space per 10 sites to be used for accommodation.	
	Parks with more than 100 sites - a minimum of 1 space per 15 sites used for accommodation.	
	A minimum of 1 space for every caravan (permanently fixed to the ground) or cabin.	
Tourist accommodation	1 car parking space per accommodation unit / guest room.	
Commercial Uses		
Auction room/ depot	1 space per 100m ² of building floor area plus an additional 2 spaces.	
Automotive collision repair	3 spaces per service bay.	

Page 30 of 37 Printed on 11/08/2022

Call centre	8 spaces per 100m ² of gross leasable floor area.	
Motor repair station	3 spaces per service bay.	
Office	4 spaces per 100m ² of gross leasable floor area.	
Retail fuel outlet	3 spaces per 100m ² gross leasable floor area.	
Service trade premises	2.5 spaces per 100m ² of gross leasable floor area	
	1 space per 100m ² of outdoor area used for display purposes.	
Shop (no commercial kitchen)	5.5 spaces per 100m ² of gross leasable floor area where not located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.	
	5 spaces per 100m ² of gross leasable floor area where located in an integrated complex containing two or more tenancies (and which may comprise more than one building) where facilities for off-street vehicle parking, vehicle loading and unloading, and the storage and collection of refuse are shared.	
Shop (in the form of a bulky goods outlet)	2.5 spaces per 100m ² of gross leasable floor area.	
Shop (in the form of a restaurant or involving a commercial kitchen)	Premises with a dine-in service only (which may include a take-away component with no drive-through) - 0.4 spaces per seat.	
	Premises with take-away service but with no seats - 12 spaces per 100m ² of total floor area plus a drive-through queue capacity of ten vehicles measured from the pick-up point.	
	Premises with a dine-in and drive-through take-away service - 0.3 spaces per seat plus a drive through queue capacity of 10 vehicles measured from the pick-up point.	
Community and Civic Uses		
Childcare centre	0.25 spaces per child	
Library	4 spaces per 100m ² of total floor area.	
Community facility	10 spaces per 100m ² of total floor area.	
Hall / meeting hall	0.2 spaces per seat.	
Place of worship	1 space for every 3 visitor seats.	
Pre-school	1 per employee plus 0.25 per child (drop off/pick up bays)	
Educational establishment	For a primary school - 1.1 space per full time equivalent employee plus 0.25 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.	
	For a secondary school - 1.1 per full time equivalent employee plus 0.1 spaces per student for a pickup/set down area either on-site or on the public realm within 300m of the site.	

Page 31 of 37 Printed on 11/08/2022

	For a tertiary institution - 0.4 per student based on the maximum number of students on the site at any time.			
Health Related Uses				
Hospital	4.5 spaces per bed for a public hospital.			
	1.5 spaces per bed for a private hospital.			
Consulting room	4 spaces per consulting room excluding ancillary facilities.			
Recreational and Entertainment Uses				
Cinema complex	0.2 spaces per seat.			
Concert hall / theatre	0.2 spaces per seat.			
Hotel	1 space for every 2m ² of total floor area in a public bar plus 1 space for every 6m ² of total floor area available to the public in a lounge, beer garden plus 1 space per 2 gaming machines, plus 1 space per 3 seats in a restaurant.			
Indoor recreation facility	6.5 spaces per 100m ² of total floor area for a Fitness Centre			
	4.5 spaces per 100m ² of total floor area for all other Indoor recreation facilities.			
Industry/Employment Uses				
Fuel depot	1.5 spaces per 100m ² total floor area			
	1 spaces per 100m ² of outdoor area used for fuel depot activity purposes.			
Industry	1.5 spaces per 100m ² of total floor area.			
Store	0.5 spaces per 100m ² of total floor area.			
Timber yard	1.5 spaces per 100m ² of total floor area			
	1 space per 100m ² of outdoor area used for display purposes.			
Warehouse	0.5 spaces per 100m ² total floor area.			
Other Uses				
Funeral Parlour	1 space per 5 seats in the chapel plus 1 space for each vehicle operated by the parlour.			
Radio or Television Station	5 spaces per 100m ² of total building floor area.			

Table 2 - Off-Street Car Parking Requirements in Designated Areas

The following parking rates apply in any zone, subzone or other area described in the 'Designated Areas' column subject to the following:

(a) the location of the development is unable to satisfy the requirements of Table 2 – Criteria (other than where a location is exempted from the application of those criteria)

(b) the development satisfies Table 2 – Criteria (or is exempt from those criteria) and is located in an area where a lawfully established carparking fund operates, in which case the number of spaces are reduced by an amount equal to the number of spaces offset by contribution to the fund.

Page 32 of 37 Printed on 11/08/2022

Class of Development	Car Parking Rate Where a development comprises more than one development type, then the overall car parking rate will be taken to be the sum of the car parking rates for each development type.		Designated Areas
	Minimum number of spaces	Maximum number of spaces	
Development generally			
All classes of development	No minimum.	No maximum except in the Primary Pedestrian Area identified in the Primary Pedestrian Area Concept Plan, where the maximum is: 1 space for each dwelling with a total floor area less than 75 square metres 2 spaces for each dwelling with a total floor area between 75 square metres and 150 square metres 3 spaces for each dwelling with a total floor area greater than 150 square metres. Residential flat building or Residential component of a multistorey building: 1 visitor space for each 6 dwellings.	Capital City Zone City Main Street Zone City Riverbank Zone Adelaide Park Lands Zone Business Neighbourhood Zone (within the City of Adelaide) The St Andrews Hospital Precinct Subzone and Women's and Children's Hospital Precinct Subzone of the Community Facilities Zone
Non-residential developmen	nt		
Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	5 spaces per 100m ² of gross leasable floor area.	City Living Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Non-residential development excluding tourist accommodation	3 spaces per 100m ² of gross leasable floor area.	6 spaces per 100m ² of gross leasable floor area.	Strategic Innovation Zone Suburban Activity Centre Zone Suburban Business Zone Business Neighbourhood Zone Suburban Main Street Zone Urban Activity Centre Zone
Tourist accommodation	1 space for every 4 bedrooms up to 100 bedrooms plus 1 space for every 5 bedrooms over 100 bedrooms	1 space per 2 bedrooms up to 100 bedrooms and 1 space per 4 bedrooms over 100 bedrooms	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone

Page 33 of 37 Printed on 11/08/2022

			Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential development			
Residential component of a multi-storey building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Strategic Innovation Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone
Residential flat building	Dwelling with no separate bedroom -0.25 spaces per dwelling 1 bedroom dwelling - 0.75 spaces per dwelling 2 bedroom dwelling - 1 space per dwelling 3 or more bedroom dwelling - 1.25 spaces per dwelling 0.25 spaces per dwelling for visitor parking.	None specified.	City Living Zone Urban Activity Centre Zone Urban Corridor (Boulevard) Zone Urban Corridor (Business) Zone Urban Corridor (Living) Zone Urban Corridor (Main Street) Zone Urban Neighbourhood Zone

Table 2 - Criteria:

The following criteria are used in conjunction with Table 2. The 'Exception' column identifies locations where the criteria do not apply and the car parking rates in Table 2 are applicable.

Criteria	Exceptions
The designated area is wholly located within Metropolitan Adelaide and any part of the development site satisfies one or more of the following:	(a) All zones in the City of Adelaide (b) Strategic Innovation Zone in the following locations: (i) City of Burnside (ii) City of Marion (iii) City of Mitcham
 (a) is within 200 metres of any section of road reserve along which a bus service operates as a high frequency public transit service⁽²⁾ (b) is within 400 metres of a bus interchange⁽¹⁾ (c) is within 400 metres of an O-Bahn interchange⁽¹⁾ (d) is within 400 metres of a passenger rail station⁽¹⁾ (e) is within 400 metres of a passenger tram station⁽¹⁾ (f) is within 400 metres of the Adelaide Parklands. 	(c) Urban Corridor (Boulevard) Zone (d) Urban Corridor (Business) Zone (e) Urban Corridor (Living) Zone (f) Urban Corridor (Main Street) Zone (g) Urban Neighbourhood Zone

[NOTE(S): (1)Measured from an area that contains any platform(s), shelter(s) or stop(s) where people congregate for the purpose waiting to board a bus, tram or train, but does not include areas used for the parking of vehicles. (2) A high frequency public transit service is a route serviced every 15 minutes between 7.30am and 6.30pm Monday to Friday and every 30 minutes at night, Saturday, Sunday and public holidays until 10pm.]

Page 34 of 37 Printed on 11/08/2022

Table 3 - Off-Street Bicycle Parking Requirements

The bicycle parking rates apply within designated areas located within parts of the State identified in the Schedule to Table 3.

Where a development comprises more than one development type, then the overall bloycle parking rate will be taken to be the sum of the bloycle parking rates for each development type. Consulting Room 1 space per 20 employees plus 1 space per 20 consulting rooms for customers. Educational establishment For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors. For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students. Hospital 1 space per 15 beds plus 1 space per 30 beds for visitors. Indoor recreation facility 1 space per 4 employees plus 1 space per 200m² of gross leasable floor area for visitors. Licensed Premises 1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 40 square metres of square metres gaming room floor area. Office 1 space for every 200m² of gross leasable floor area plus 2 spaces plus 1 space per 1000m² of gross leasable floor area plus 2 spaces plus 1 space per 1000m² of gross leasable floor area for visitors. Pre-school 1 space per 20 full time employees plus 1 space per 40 full time children. Recreation area Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for visitors and in all other cases 1 space for every 40 dwellings for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for visitors and in all other cases 1 space for every 40 dwellings for residents with a total floor area greater than 150 square metres, plus 1 for every 0 dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 0 dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 0 dwelling	Class of Development	Bicycle Parking Rate
Educational establishment For a secondary school - 1 space per 20 full-time time employees plus 10 percent of the total number of employee spaces for visitors. For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students. Hospital 1 space per 15 beds plus 1 space per 30 beds for visitors. Indoor recreation facility 1 space per 4 employees plus 1 space per 200m² of gross leasable floor area for visitors. Licensed Premises 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres of bar floor area, plus 1 per 120 square metres garning room floor area. Office 1 space for every 200m² of gross leasable floor area plus 2 spaces plus 1 space per 1000m² of gross leasable floor area for visitors. Pre-school 1 space per 20 full time employees plus 1 space per 40 full time children. Recreation area 1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers. Residential flat building 150 square metres, 2 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors. Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for every 10 dwellings for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for every 10 dwellings for visitors, and in all		parking rate will be taken to be the sum of the bicycle parking rates for each development
number of employee spaces for visitors. For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students. Hospital 1 space per 15 beds plus 1 space per 30 beds for visitors. Indoor recreation facility 1 space per 4 employees plus 1 space per 200m² of gross leasable floor area for visitors. Licensed Premises 1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 60 square metres lounge and beer garden floor area, plus 1 per 60 square metres donne and beer garden floor area, plus 1 per 60 square metres donne and beer garden floor area, plus 1 per 60 square metres square metres gaming room floor area. Office 1 space for every 200m² of gross leasable floor area plus 2 spaces plus 1 space per 1000m² of gross leasable floor area for visitors. Pre-school 1 space per 20 full time employees plus 1 space per 40 full time children. Recreation area 1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers. Within the City of Adelaide 1 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other c	Consulting Room	1 space per 20 employees plus 1 space per 20 consulting rooms for customers.
Indoor recreation facility 1 space per 15 beds plus 1 space per 30 beds for visitors.	Educational establishment	
Indoor recreation facility 1 space per 4 employees plus 1 space per 200m² of gross leasable floor area for visitors. 1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area. Office 1 space for every 200m² of gross leasable floor area plus 2 spaces plus 1 space per 1000m² of gross leasable floor area for visitors. 1 space per 20 full time employees plus 1 space per 40 full time children. Pre-school Recreation area Within the City of Adelaide 1 for every dwelling for residents with a total floor area greater than 150 square metres, 2 for every 4 dwellings for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors. Residential component of a multi-storey building Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors. Within the City of Adelaide 1 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for		For tertiary education - 1 space per 20 employees plus 1 space per 10 full time students.
Licensed Premises 1 per 20 employees, plus 1 per 60 square metres total floor area, plus 1 per 40 square metres of bar floor area, plus 1 per 60 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area. Office 1 space for every 200m² of gross leasable floor area plus 2 spaces plus 1 space per 1000m² of gross leasable floor area for visitors. 1 space per 20 full time employees plus 1 space per 40 full time children. Recreation area Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents with a total floor area less than 150 square metres, 2 for every dwelling for for every 10 dwellings for visitors. Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors. Shop 1 space for every 300m² of gross leasable floor area plus 1 space for every 600m² of gross leasable floor area for customers. Tourist accommodation 1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.	Hospital	1 space per 15 beds plus 1 space per 30 beds for visitors.
metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room floor area. Office 1 space for every 200m² of gross leasable floor area plus 2 spaces plus 1 space per 1000m² of gross leasable floor area for visitors. 1 space per 20 full time employees plus 1 space per 40 full time children. Recreation area Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors. Within the City of Adelaide 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for visitors. Within the City of Adelaide 1 for every to willing for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwellings for residents with a total floor area less than 150 square metres, 2 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors. Shop 1 space for every 300m² of gross leasable floor area plus 1 space for every 600m² of gross leasable floor area for customers.	Indoor recreation facility	1 space per 4 employees plus 1 space per 200m ² of gross leasable floor area for visitors.
of gross leasable floor area for visitors. Pre-school 1 space per 20 full time employees plus 1 space per 40 full time children. Pre-school 1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers. Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 4 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors. Residential component of a multi-storey building Within the City of Adelaide 1 for every welling for residents with a total floor area less than 150 square metres, 2 for every 4 dwellings for residents with a total floor area greater than 150 square metres, plus 1 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors. Shop 1 space for every 300m² of gross leasable floor area plus 1 space for every 600m² of gross leasable floor area for customers. Tourist accommodation 1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.	Licensed Premises	metres of bar floor area, plus 1 per 120 square metres lounge and beer garden floor area, plus 1 per 60 square metres dining floor area, plus 1 per 40 square metres gaming room
Recreation area The period of the period	Office	
Residential flat building Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 4 dwellings for visitors. Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors. Shop 1 space for every 300m² of gross leasable floor area plus 1 space for every 600m² of gross leasable floor area for customers. 1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.	Pre-school	1 space per 20 full time employees plus 1 space per 40 full time children.
Residential flat building 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 for every 10 dwellings for visitors. Within the City of Adelaide 1 for every dwelling for residents with a total floor area less than 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors. Shop 1 space for every 300m² of gross leasable floor area plus 1 space for every 600m² of gross leasable floor area for customers. 1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.	Recreation area	1 per 1500 spectator seats for employees plus 1 per 250 visitor and customers.
Residential component of a multi-storey building 150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for every 4 dwellings for residents plus 1 space for every 10 dwellings for visitors. Shop 1 space for every 300m² of gross leasable floor area plus 1 space for every 600m² of gross leasable floor area for customers. Tourist accommodation 1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.	Residential flat building	150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for
leasable floor area for customers. Tourist accommodation 1 space for every 20 employees plus 2 for the first 40 rooms and 1 for every additional 40 rooms for visitors.	Residential component of a multi-storey building	150 square metres, 2 for every dwelling for residents with a total floor area greater than 150 square metres, plus 1 for every 10 dwellings for visitors, and in all other cases 1 space for
rooms for visitors.	Shop	
Schedule to Table 3	Tourist accommodation	
	Schedule to Table 3	

Designated Area	Relevant part of the State The bicycle parking rate applies to a designated area located in a relevant part of the State described below.
All zones	City of Adelaide
Business Neighbourhood Zone Strategic Innovation Zone	Metropolitan Adelaide

Page 35 of 37 Printed on 11/08/2022

Policy24 - Enquiry

Suburban Activity Centre Zone	
Suburban Business Zone	
Suburban Main Street Zone	
Urban Activity Centre Zone	
Urban Corridor (Boulevard) Zone	
Urban Corridor (Business) Zone	
Urban Corridor (Living) Zone	
Urban Corridor (Main Street) Zone	
Urban Neighbourhood Zone	

Page 36 of 37 Printed on 11/08/2022

Page 37 of 37 Printed on 11/08/2022

1390-1400 GOLDEN GROVE RD GOLDEN GROVE SA 5125

Address:

Click to view a detailed interactive SAILIS in SAILIS

To view a detailed interactive property map in SAPPA click on the map below



Property Zoning Details

Overlay

Defence Aviation Area (All structures over 15 metres)

Hazards (Flooding)

Major Urban Transport Routes

Prescribed Wells Area

Regulated and Significant Tree

Traffic Generating Development

Water Resources

Zone

Local Activity Centre

Selected Development(s)

Advertisement

This development may be subject to multiple assessment pathways. Please review the document below to determine which pathway may be applicable based on the proposed development compliances to standards.

If no assessment pathway is shown this mean the proposed development will default to performance assessed. Please contact your local council in this instance. Refer to Part 1 - Rules of Interpretation - Determination of Classes of Development

Property Policy Information for above selection

Advertisement - Code Assessed - Performance Assessed

Part 2 - Zones and Sub Zones

Local Activity Centre Zone

Assessment Provisions (AP)

Page 1 of 9 Printed on 11/08/2022

DO 1 A range of small-scale shops, offices, business, health and community facilities to provide daily services to and support walkable neighbourhoods.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Р	erformance Outcome		eemed-to-Satisfy Criteria / Designated Performance Feature
	Advertis	sements	
PO 4.1		DTS/DPF	4.1
	ents are sited and designed to achieve an overall or of appearance along individual street frontages.	None ar	e applicable.
PO 4.2		DTS/DPF	4.2
Freestandin	g advertisements:	Freestar	nding advertisements:
(b) are cer (c) avo (d) pos	entify the associated business(es) of a size that is commensurate with the scale of the entre and the street frontage oid visual clutter sitively respond to the context without dominating the ality.	(a) (b)	do not exceed 5m in height, the adjacent building wall height, or the zone's height allowance (whichever is the lesser) do not have a sign face that exceeds 4m ² per side.

Table 5 - Procedural Matters (PM) - Notification

The following table identifies, pursuant to section 107(6) of the *Planning, Development and Infrastructure Act 2016*, classes of performance assessed development that are excluded from notification. The table also identifies any exemptions to the placement of notices when notification is required.

Interpretation

Notification tables exclude the classes of development listed in Column A from notification provided that they do not fall within a corresponding exclusion prescribed in Column B.

Where a development or an element of a development falls within more than one class of development listed in Column A, it will be excluded from notification if it is excluded (in its entirety) under any of those classes of development. It need not be excluded under all applicable classes of development.

Where a development involves multiple performance assessed elements, all performance assessed elements will require notification (regardless of whether one or more elements are excluded in the applicable notification table) unless every performance assessed element of the application is excluded in the applicable notification table, in which case the application will not require notification.

Class of Development	Exceptions
(Column A)	(Column B)
 Development which, in the opinion of the relevant authority, is of a minor nature only and will not unreasonably impact on the owners or occupiers of land in the locality of the site of the development. 	None specified.
Any kind of development where the site of the development is not adjacent land to a site (or land) used	Except any of the following:

Page 2 of 9 Printed on 11/08/2022

	for residential purposes in a neighbourhood-type zone.	the demolition of a State or Local Heritage Place
		 the demolition of a building (except an ancillary building) in a Historic Area Overlay.
3.	Any development involving any of the following (or of any combination of any of the following): (a) advertisement (b) air handling unit, air conditioning system or exhaust fan (c) building work on railway land (d) community facility (e) consulting room (f) deck (g) dwelling (h) fence (i) land division (j) office (k) retaining wall (l) shade sail (m) shop (n) solar photovoltaic panels (roof mounted) (o) verandah (p) water tank.	Except development that exceeds the maximum building height specified in Local Activity Centre Zone DTS/DPF 3.1 or does not satisfy any of the following: 1. Local Activity Centre Zone DTS/DPF 3.2 2. Local Activity Centre Zone DTS/DPF 3.3.
4.	Any development involving any of the following (or of any combination of any of the following): (a) internal building works (b) replacement building (c) temporary accommodation in an area affected by bushfire (d) tree damaging activity.	None specified.
5.	Demolition.	 Except any of the following: the demolition of a State or Local Heritage Place the demolition of a building (except an ancillary building) in a Historic Area Overlay.

None specified.

Placement of Notices - Exemptions for Restricted Development

None specified.

Part 3 - Overlays

Defence Aviation Area Overlay

Assessment Provisions (AP)

Page 3 of 9 Printed on 11/08/2022

	Desired Outcome
DO 1	Management of potential impacts of buildings on the operational and safety requirements of Defence Aviation Areas.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Built	Form
PO 1.1	DTS/DPF 1.1
Building height does not pose a hazard to the operations of Defence Aviation Areas.	Building height does not exceed the relevant height specified by the Defence Aviation Area Overlay.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body	Purpose of Referral	Statutory Reference
None	None	None	None

Hazards (Flooding) Overlay

Assessment Provisions (AP)

	Desired Outcome
DO 1	Impacts on people, property, infrastructure and the environment from high flood risk are minimised by retaining areas free from development, and minimising intensification where development has occurred.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Flood R	esilience
PO 3.1	DTS/DPF 3.1
Development avoids the need for flood protection works.	None are applicable.
PO 3.2	DTS/DPF 3.2
Development does not cause unacceptable impacts on any adjoining property by the diversion of flood waters or an increase in	None are applicable.

Page 4 of 9 Printed on 11/08/2022

flood velocity or flood level.	
PO 3.3	DTS/DPF 3.3
Development does not impede the flow of floodwaters through the allotment or the surrounding land, or cause an unacceptable loss of flood storage.	None are applicable.
Environment	tal Protection
PO 4.2	DTS/DPF 4.2
Development does not create or aggravate the potential for erosion or siltation or lead to the destruction of vegetation during a flood.	None are applicable.

Procedural Matters (PM) - Referrals

The following table identifies classes of development / activities that require referral in this Overlay and the applicable referral body. It sets out the purpose of the referral as well as the relevant statutory reference from Schedule 9 of the Planning, Development and Infrastructure (General) Regulations 2017.

Class of Development / Activity	Referral Body		Statutory Reference
None	None	None	None

Part 4 - General Development Policies

Advertisements

Assessment Provisions (AP)

Desired Outcome		
DO 1	Advertisements and advertising hoardings are appropriate to context, efficient and effective in communicating with the public, limited in number to avoid clutter, and do not create hazard.	

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
Appe	arance
PO 1.1	DTS/DPF 1.1
Advertisements are compatible and integrated with the design of the building and/or land they are located on.	Advertisements attached to a building satisfy all of the following: (a) are not located in a Neighbourhood-type zone (b) where they are flush with a wall: (i) if located at canopy level, are in the form of a fascia sign (ii) if located above canopy level: A. do not have any part rising above

Page 5 of 9 Printed on 11/08/2022

	parapet height B. are not attached to the roof of the building	
	(c) where they are not flush with a wall: (i) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (ii) if attached to a two-storey building: A. has no part located above the finished floor level of the second storey of the building B. does not protrude beyond the outer limits	
	of any verandah structure below C. does not have a sign face that exceeds 1m2 per side.	
	(d) if located below canopy level, are flush with a wall (e) if located at canopy level, are in the form of a fascia sign (f) if located above a canopy: (i) are flush with a wall (ii) do not have any part rising above parapet height (iii) are not attached to the roof of the building.	
	 (g) if attached to a verandah, no part of the advertisement protrudes beyond the outer limits of the verandah structure (h) if attached to a two-storey building, have no part located above the finished floor level of the second storey of the building (i) where they are flush with a wall, do not, in combination 	
	with any other existing sign, cover more than 15% of the building facade to which they are attached.	
PO 1.2	DTS/DPF 1.2	
Advertising hoardings do not disfigure the appearance of the land upon which they are situated or the character of the locality.	Where development comprises an advertising hoarding, the supporting structure is:	
	(a) concealed by the associated advertisement and decorative detailing or	
	(b) not visible from an adjacent public street or thoroughfare, other than a support structure in the form of a single or dual post design.	
PO 1.3	DTS/DPF 1.3	
Advertising does not encroach on public land or the land of an adjacent allotment.	Advertisements and/or advertising hoardings are contained within the boundaries of the site.	
PO 1.4	DTS/DPF 1.4	
Where possible, advertisements on public land are integrated with existing structures and infrastructure.	Advertisements on public land that meet at least one of the following:	
	(a) achieves Advertisements DTS/DPF 1.1 (b) are integrated with a bus shelter.	
PO 1.5	DTS/DPF 1.5	

Page 6 of 9 Printed on 11/08/2022

Advertisements and/or advertising hoardings are of a scale and size appropriate to the character of the locality.	None are applicable.	
Proliferation of	Advertisements	
PO 2.1	DTS/DPF 2.1	
Proliferation of advertisements is minimised to avoid visual clutter and untidiness.	No more than one freestanding advertisement is displayed per occupancy.	
PO 2.2	DTS/DPF 2.2	
Multiple business or activity advertisements are co-located and coordinated to avoid visual clutter and untidiness.	Advertising of a multiple business or activity complex is located on a single advertisement fixture or structure.	
PO 2.3	DTS/DPF 2.3	
Proliferation of advertisements attached to buildings is minimised to avoid visual clutter and untidiness.	Advertisements satisfy all of the following:	
	 (a) are attached to a building (b) other than in a Neighbourhood-type zone, where they are flush with a wall, cover no more than 15% of the building facade to which they are attached 	
	(c) do not result in more than one sign per occupancy that is not flush with a wall.	
Advertisin	ng Content	
PO 3.1	DTS/DPF 3.1	
Advertisements are limited to information relating to the lawful use of land they are located on to assist in the ready identification of the activity or activities on the land and avoid unrelated content that contributes to visual clutter and untidiness.	Advertisements contain information limited to a lawful existing or proposed activity or activities on the same site as the advertisement.	
Amenity	I Impacts	
PO 4.1	DTS/DPF 4.1	
Light spill from advertisement illumination does not unreasonably compromise the amenity of sensitive receivers.	Advertisements do not incorporate any illumination.	
Sa	fety	
PO 5.1	DTS/DPF 5.1	
Advertisements and/or advertising hoardings erected on a verandah or projecting from a building wall are designed and located to allow for safe and convenient pedestrian access.	Advertisements have a minimum clearance of 2.5m between the top of the footpath and base of the underside of the sign.	
PO 5.2	DTS/DPF 5.2	
Advertisements and/or advertising hoardings do not distract or create a hazard to drivers through excessive illumination.	No advertisement illumination is proposed.	
PO 5.3	DTS/DPF 5.3	
Advertisements and/or advertising hoardings do not create a hazard to drivers by:	Advertisements satisfy all of the following:	
(a) being liable to interpretation by drivers as an official traffic sign or signal	 (a) are not located in a public road or rail reserve (b) are located wholly outside the land shown as 'Corner Cut-Off Area' in the following diagram 	

Page 7 of 9 Printed on 11/08/2022

Policy24 - Enquiry	
 (b) obscuring or impairing drivers' view of official traffic signs or signals (c) obscuring or impairing drivers' view of features of a road that are potentially hazardous (such as junctions, bends, changes in width and traffic control devices) or other road or rail vehicles at/or approaching level crossings. 	Corner Cut- Off Area 4.5M Road Reserve
PO 5.4	DTS/DPF 5.4
Advertisements and/or advertising hoardings do not create a hazard by distracting drivers from the primary driving task at a location where the demands on driver concentration are high.	Advertisements and/or advertising hoardings are not located along or adjacent to a road having a speed limit of 80km/h or more.
PO 5.5	DTS/DPF 5.5
Advertisements and/or advertising hoardings provide sufficient clearance from the road carriageway to allow for safe and convenient movement by all road users.	 (a) on a kerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 0.6m from the roadside edge of the kerb (b) on an unkerbed road with a speed zone of 60km/h or less, the advertisement or advertising hoarding is located at least 5.5m from the edge of the seal (c) on any other kerbed or unkerbed road, the advertisement or advertising hoarding is located a minimum of the following distance from the roadside edge of the kerb or the seal: (a) 110 km/h road - 14m (b) 100 km/h road - 13m (c) 90 km/h road - 10m (d) 70 or 80 km/h road - 8.5m.
PO 5.6 Advertising near signalised intersections does not cause unreasonable distraction to road users through illumination, flashing lights, or moving or changing displays or messages.	DTS/DPF 5.6 Advertising: (a) is not illuminated (b) does not incorporate a moving or changing display or message (c) does not incorporate a flashing light(s).

Clearance from Overhead Powerlines

Assessment Provisions (AP)

Desired Outcome DO 1 Protection of human health and safety when undertaking development in the vicinity of overhead transmission powerlines.

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature
PO 1.1	DTS/DPF 1.1
Buildings are adequately separated from aboveground powerlines to	One of the following is satisfied:

Page 8 of 9 Printed on 11/08/2022

minimise potential hazard to people and property.	(a)	a declaration is provided by or on behalf of the applicant to the effect that the proposal would not be contrary to the
		regulations prescribed for the purposes of section 86 of the <i>Electricity Act 1996</i>
	(b)	there are no aboveground powerlines adjoining the site that are the subject of the proposed development.

Infrastructure and Renewable Energy Facilities

Assessment Provisions (AP)

Desired Outcome DO 1 Efficient provision of infrastructure networks and services, renewable energy facilities and ancillary development in a manner that minimises hazard, is environmentally and culturally sensitive and manages adverse visual impacts on natural and rural landscapes and residential amenity.

Performance Outcomes (PO) and Deemed-to-Satisfy (DTS) Criteria / Designated Performance Feature (DPF)

Performance Outcome	Deemed-to-Satisfy Criteria / Designated Performance Feature	
Wastewater Services		
PO 12.2	DTS/DPF 12.2	
Effluent drainage fields and other wastewater disposal areas are maintained to ensure the effective operation of waste systems and minimise risks to human health and the environment.	Development is not built on, or encroaches within, an area that is, or will be, required for a sewerage system or waste control system.	

Page 9 of 9 Printed on 11/08/2022