THE CITY OF TEA TREE GULLY

› Technical Specifications

CIVIL INFRASTRUCTURE

DESCRIPTION: PITS & DRAINAGE - STORMWATER DRAINAGE PIPE ANCHOR BLOCK

CODE: CIV23 01/05/2025

APPLICATIONS


Regional	●
District	●
Neighbourhood	●
Local	●
Main Roads	●
Local Roads	●

PERFORMANCE CRITERIA


IMAGE/S

Images are indicative of the style, not a specific brand. Council's procurement policy must be followed when selecting and purchasing items.

MATERIALS	RRJ pipes to be used.
FINISHES	Concrete strength to be 25MPa.
COLOURS	
SIZE (INDICATIVE)	
VARIATIONS	
OPTIONS	For use on stormwater drainage pipe diameters up to 600mm at grades of 1 in 5 or greater. Larger pipes to be designed based on soil type and design flow.
INSTALLATION INSTRUCTIONS	To be constructed at a min. every 5th joint and at all structures.
DDA (Universal design principles)	
MAINTENANCE	
ENVIRONMENTAL	
EXPECTED LIFESPAN / END OF LIFE REPLACEMENT	
FURTHER INFORMATION	
OTHER INFORMATION	
RELEVANT STANDARDS	

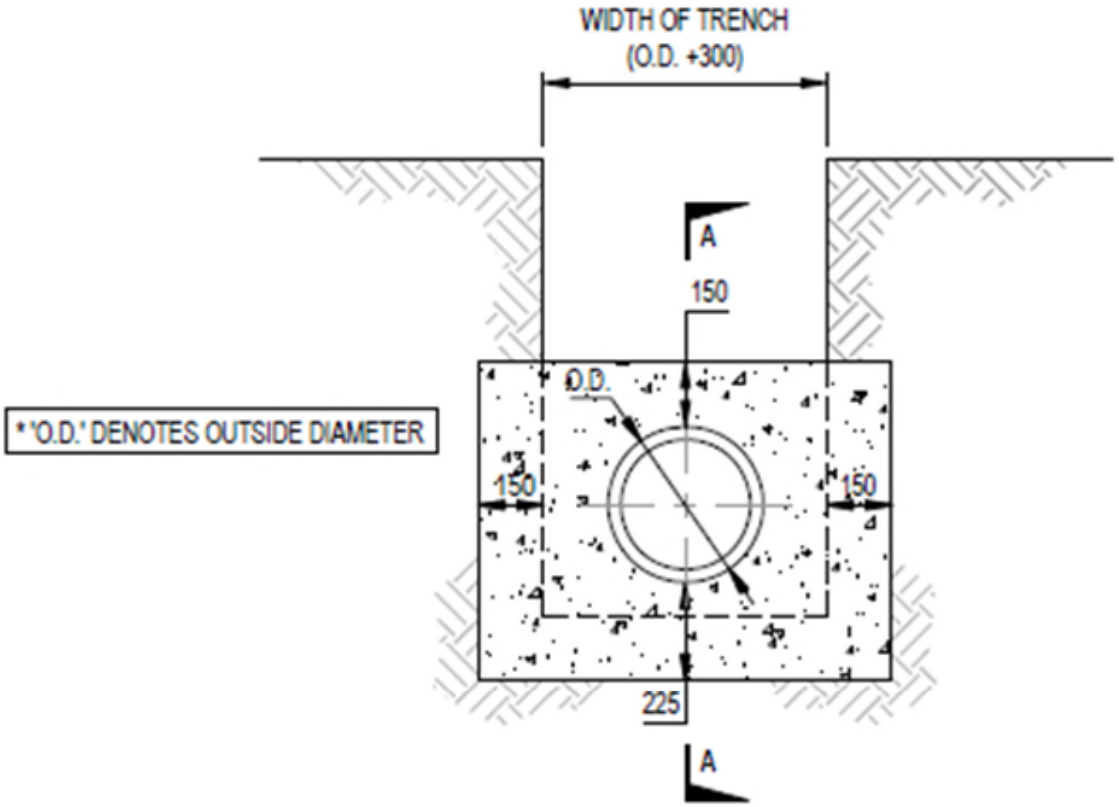

ELEVATION

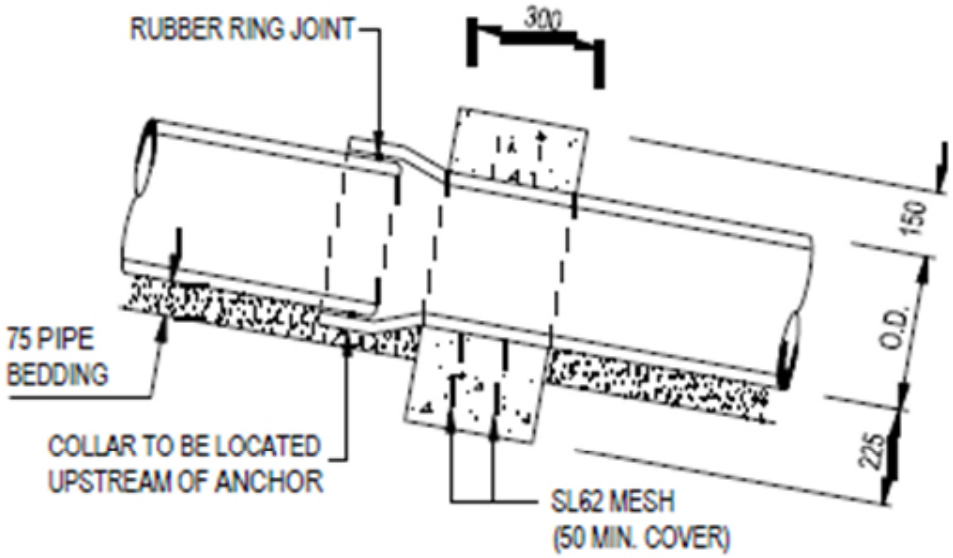

SECTION A-A